JAMICON TEAPO RALEC ASJ

ALUMINUM ELECTROLYTIC

CAPACITOR



KAIMEI ELECTRONIC CORP.
13F, No.81, Sec. 1, Xintai 5th Rd.,
Xizhi Dist. New Taipei City 22143, Taiwan. ROC
Tel: +886-2-2698-1010
Fax: 886-2-2698-0386

Company Profile

Founded:	1978/9/11
TSE Listed：	1998/8/29
Stock Code：	TWSE 2375
Capital：	USD 36 million
Employees：	2100
Capacity：	54.9 billion pcs/ month(Resistors,Capacitors,Cool Fans)
Certificates:	IATF-16949/ OHSAS/ QC080000/ AEC-Q200/ VDA6.3
Portfolios：	Aluminium Electrolytic Capacitors AC/DC Cooling Fans & Blowers Chip Resistors, Metal-alloy Current Sensors

Milestone:

•2005	Acquired G-Luxon
•2016	Kaimei Acqusition
•2019	Kaimei Teapo Integration
•2021	Acquired Ralec+ASJ

CARBON NEUTRALITY

YOUR PERFECT MATCHES PARTNER

JAMICON TEAPO



SMD E-CAP

- CB/CX/CF/CZ/CD series
- High voltage, 6.3-100 V
- High temperature, 105°-125°(135°) C
- Long life, 2K-7K hours
- Miniature, CX 100uF/25WV 6.3x7.7 (6.3x5.7)
- CX 330uF/50WV 12.5x13.5 (10x10.2) mm
- Low impedance



SNAP-IN E-CAP

- HS/HM/LR/HL/HX/PA/QA/QW series
- High voltage, up to 600 (630) V
- High temperature, 105°-125°(130°) C
- Long life, 2K-18K hours
- Miniature, LR 1,200uF/420WV 35x50 (35x45) mm
- High Ripple



RADIAL E-CAP

TK/TL/TT/TU/TJ/TR/TS/WB/WF/AU series
High voltage, up to 600 (650) V
High temperature, 105°-135°(150°) C
Long life, 2K-20K hours
Miniature, TK 22uF/420WV 8x16 (8x14) mm
Low impedance, Quick charge & High ripple



POLYMER/HYBRID E-CAP

FS/FB/FT/VS/VD/VQ/YD/YA series
High voltage, up to 80(160)V
High temperature, 105°-125°(135°) C
Long life, 2K-20K hours
Miniature, YA 330uF/35WV 10x12.2 (10x10.2) mm
High frequency & Low impedance

RALEC
A S J

CARBON NEUTRALITY

YOUR PERFECT MATCHES PARTNER



AUTOMOTIVE GRADE METAL ALLOY CHIP RESISTORS

- Ideal for current detection under high current circuit.
- Applicable to car electronics, industrial application.
- AEC-Q200 qualified.
- Applicable to lead-free and halogen-free application.



METAL ALLOY CURRENT SENSIORS

- Metal Alloy chip resistor for general industrial electronical application.
- Provide samll size and wide terminal low inductance product.
- 2 terminals and 4 terminals product available.
- Applicable to lead-free and halogen-free application.



THIN FILM CHIP RESISTORS

- Applicable to lead-free and halogen-free thin film resistor.
- Superior T.C.R with high precision resistance tolerance.
- High precision industrial application.
- Applicable to lead-free and halogen-free application.




LOW RESISTANCE CHIP RESISTORS

- General purpose thick film low resistance chip resistor for general industrial & electronical application.
- Provided special application chip resistor.
- Applicable to lead-free and halogen-free application.
- General industrial & electronical application.




THICK FILM CHIP RESISTORS

- Ultra small size for electronics industry application.
- Provided special application chip resistor.
- Anti Sulfureted chip resistor for general industrial application.




ANTI SULFURETED CHIP RESISTORS

- Anti Sulfureted thick film resistor for general industrial application.
- Anti Sulfureted thick film resistor with high voltage/ high precision type for special industrial application.
- Superior sulfur resistant capacity.



THICK FILM ARRAY CHIP RESISTORS

- Appearance size from 0402 to 0603.
- Concave / convex / flat terminal type available.
- General industrial & electronical application.
- Applicable to lead-free and halogen-free application.



FULLY LEAD FREE CHIP RESISTORS

- Applicable to lead-free and halogen-free application.
- Thick film resistor for general industrial application.
- High voltage/ high precision type for special industrial application.

CARBON NEUTRALITY

YOUR PERFECT MATCHES PARTNER

JAMICON



DC AXIAL FANS

- Size, 25-200 mm
- Voltage, 5-48 V
- Operating termperature range, -10° to 105°C
- Life time, 40K-100K hours
- Elec. function, RD/FG/PWM
- IP protection, IP55-68, GR487 (Salt spray test)




DC BLOWERS

- Size, 50-97 mm
- Voltage, 12-24 V
- Operating termperature range, -10° to 90°C
- Life time, 40K-100K hours
- Elec. function, RD/FG/PWM
- IP protection, IP55-68



AC FANS

- Size, 80-172 mm
- Voltage, 110-240 V (50/60Hz)
- Operating temperature range, -10° to 70°C
- Life time, 40K-70K hours
- Terminal/Wire type

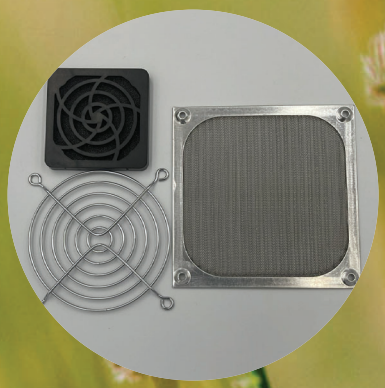

ACCESSARIES

- Fan guard
- Grille filter
- Power cord
- Accessary Assembly

JAMICON TEAPO RALEC ASJ

CONTACT US

YOUR PERFECT MATCHES PARTNER

KAIMEI ELECTRONIC CORP. (TAIPEI, HEADQUARTER)
13F., No.81, Sec.1, Xintai 5th Rd., Xizhi Dist., New Taipei City 22101,Taiwan.
(TEL) +886 (2) 2698 1010, (FAX) +886 (2) 2698 0386

SUZHOU KAIMEI CORP. (SUZHOU)
No.2 Hangqiao Road,Wangting Township,Xiangcheng District Suzhou City, Jiangsu Province, China
(TEL) +86 (512) 6538 8640,

TEAPO (DONGGUAN) CORP. (DONGGUAN)
Building 3 and 4, No.55 Gaoli Yi Lu, Tangxia Town, Dongguan City, Guangdong Province, China
(TEL) +86 (769) 8791 4676,

RALEC ELECTRONIC CORP. (KAOHSIUNG)
No.20, Kaifa Rd., Nanzi Dist., Kaohsiung City 811, Taiwan.
(TEL) +886 (7) 366 1067,

RALEC ELECTRONIC CORP. (KUNSHAN)
333 Huang Pujiang Rd., Kunshan, Jiangsu, China.
(TEL) +86 (512) 5770 9898,

RALEC ELECTRONIC CORP. (SHENZHEN)
Room 802, Baohonglin Building, N4-1 Area, BaoAn Center District ,SZ, China.
(TEL) +86 (755) 2723 5222, (FAX) +86 (755) 2723 5960

ASJ COMPONENTS (M) SDN BHD (MALAYSIA)
PTD 37440 Jalan Perindustrian Senai 3 Kawansan Peridunstrian Senai Fasa 2
81400 Senai, Johor, Malaysia.
(TEL) +60 7 597 7800, (FAX) +60 7 5977802

ASJ PTE. LTD (SINGAPORE)
60 Paya Lebar Road #06-30 Paya Lebar Square Singapore 409051.
(TEL) +65 6412 0802, (FAX) +65 6412 0808

Email us:
sales@jamicon.teapo.com (E-cap, Cooling Fan)
sales@ralec.com (Resistance)

Websites:
https://jamicon.teapo.com/index_en.aspx (E-cap, Cooling Fan)
https://www.ralec.com/en-global (Ralec Resistance)
https://www.asj.com.sg/en-global/home/index (ASJ Resistance)

Catalogue content

● Product Guide

Page

1. Products Series Table
2. System Diagram of Capacitor
3. Industry Application
4. Part Number System
5. Liquid patch type specifications
6. Taping specifications for Raidal Type
7. Lead Cut/Forming for Radial Type
8. Terminals for Snap-in Type
9. Bolt-type processing specifications
10. Packaging specification
11. Usage conditions of Conductive Polymer（Hybrid） Aluminum Solid Capacitors
12. Precautions in Using Conductive Polymer（Hybrid） Aluminum Solid Capacitors
13. Usage conditions of Aluminum Electrolytic Capacitors
14. Precautions in Using Aluminum Electrolytic Capacitors

● Conductive Polymer Aluminum Solid Capacitors

1. SMD Type Conductive Polymer Aluminum Solid Capacitors
2. Radial Type Conductive Polymer Aluminum Solid Capacitors
3. Hybrid Capacitors Type Conductive Polymer

● Aluminum Electrolytic Capacitors

1. Surface Mount Aluminium Electrolytic Capacitors
2. Radial Type Aluminium Electrolytic Capacitors
3. Snap-in Type Aluminium Electrolytic Capacitors
4. Screw Type Aluminium Electrolytic Capacitors

Products Series Table

■ Conductive Polymer Aluminum Solid Capacitors

Classify				Pages	Features	Standard Type	Miniaturization	Long life	Low impedance	High Ripple	Endurance (+R=With ripple)	Rated voltage range (Vdc)
Type	JAMICON	TEAPO	G·LUXON									
SMD Types	VP	VP	VP		Standard	*					105℃ 2000hours	2.5~25
	VB	VB	VB		High capacitance 、 Low ESR				*		105℃ 2000hours	2.5~80
	VS	VS	VS		Long Life 、 Low ESR			*	*		105℃ 5000hours	4~80
	VA	VA	VA		Long Life			*			105℃ 15000hours	6.3~50
	VD	VD	VD		Long Life			*			105℃ 20000hours	6.3~25
	VQ	VQ	VQ		Low ESR			*			125℃ 2000hours	2.5~80
	VH	VH	VH		High temperature resistance NEW			*			125℃ 4000hours	16~80
Radial Types	FG	FG	FG		Standard	*					105℃ 2000hours	2.5~25
	FR	FR	FR		High Ripple 、 Low ESR					*	105℃ 2000hours	2.5~6.3
	FF	FF	FF		Large Capacitance				*		105℃ 2000hours	16~100
	FL	FL	FL		Special for Charger	*					105℃ 2000hours	6.3~16
	FS	FS	FS		Large Capacitance、Long Life、High Voltage			*			105℃ 5000hours	20~80
	FP	FP	FP		8mm height 、 Low ESR		*		*		105℃ 3000hours	2.5~25
	FH	FH	FH		Long life 、 Low ESR			*			105℃ 5000hours	2.5~16
	FJ	FJ	FJ		High Ripple 、 Low ESR NEW				*	*	105℃ 5000hours	2.5~35
	FC	FC	FC		Long Life			*			105℃ 15000hours	6.3~80
	FB	FB	FB		Long Life			*			105℃ 20000hours	6.3~80
	FT	FT	FT		Low ESR			*			125℃ 2000hours	6.3~80

■ Conductive Polymer Hybrid Capacitors

Classify				Pages	Features	Standard Type	Miniaturization	Long life	Low impedance	High Ripple	Endurance (+R=With ripple)	Rated voltage range (Vdc)
Type	JAMICON	TEAPO	G·LUXON									
SMD	YD	YD	YD		Standard	*		*			105℃ 5000~10000hours	16~80
	YA	YA	YA		Standard	*					125℃ 4000hours	16~80
	YB	YB	YB		High temperature resistance NEW				*	*	135℃ 2000~4000hours	16~63
	YK	YK	YK		High temperature resistance NEW				*	*	150℃ 1000hours	25~63
Radial	YS	YS	YS		Standard	*		*			105℃ 5000~10000hours	16~80
	YX	YX	YX		Standard	*					125℃ 4000hours	16~80
	YE	YE	YE		High temperature resistance NEW				*	*	135℃ 4000hours	25~80
	YH	YH	YH		High temperature resistance NEW				*	*	150℃ 1000hours	25~63

Products Series Table

■ Surface Mount Aluminum Electrolytic Capacitors

Classify				Pages	Features	Standard Type	Miniaturization	Long life	Low impedance	High Ripple	Endurance (+R=With ripple)	Rated voltage range (Vdc)
Type	JAMICON	TEAPO	G·LUXON									
General Purpose	CS	GV	GV		General purpose	*					85℃ 2000hours	4~100
	CT	SV	SV		General purpose	*					105℃ 1000hours	4~100
	CH	DV	DV		General purpose、High voltage purpose	*					105℃ 2000hours	6.3~450
	CK	PV	PV		Low Impedance	*					105℃ 1000~2000 hours	6.3~ 50
	CL	YV	YV		Low Impedance				*		105℃ 1000~2000hours	6.3~50
	CE	MV	MV		Low leakage current	*					105℃ 2000 hours	6.3 ~ 50
	CF	EV	EV		Low impedance				*		105℃ 2000 hours	6.3~50
	CX	TV	TV		Large capacitance, Ultra low impedance				*		105℃ 2000 hours	6.3~ 50
	CD	LV	LV		Low Impedance、long life Series			*	*		105℃ 2000~5000 hours	6.3~ 50
	CU	WV	WV		Long Life			*			105℃ 3000~5000 hours	6.3~ 50
	CZ	XV	XV		Ultra Low Impedance、 Long Life	*					105℃ 3000~5000hours	6.3~50
	CJ	AV	AV		Low Impedance、long life			*	*		105℃ 5000 hours	6.3~50
Special Purpose	CA	CV	CV		Low Leakage current	*					85℃ 2000 hours	6.3~50
	CN	RV	RV		Non-polar	*					85℃ 2000 hours	6.3~50
	CP	NV	NV		Non-polar	*					105℃ 2000 hours	6.3~50
	CB	HV	HV		High temperature			*			125℃ 1000~2000hours	10~50
	CQ	QV	QV		125℃High temperature NEW			*		*	125℃ 2000~4000hours	10~100
	CM	UV	UV		135℃High temperature NEW				*	*	135℃ 3000hours	10~50

■Radial Type Aluminum Electrolytic Capacitors

Classify				Pages	Features	Standard Type	Miniaturization	Long life	Low impedance	High Ripple	Endurance (+R=With ripple)	Rated voltage range (Vdc)
Type	JAMICON	TEAPO	G·LUXON									
Low Profice	ST	S5	FX		Low profile		*				105℃ 1000hours+R	6.3~50
	SH	S7	SX		Low profile		*				105℃ 1000hours+R	6.3~63
	H5	H5	H5		Low profile		*				105℃ 2000 hours+R	6.3~50
	H7	H7	H7		Low profile		*				105℃ 2000 hours+R	6.3~63
General Purpose	SK	SK	GR		Standard	*					85℃ 2000hours+R	6.3~550
	TK	SH	SM		Standard	*					105℃ 2000hours+R	6.3~550
	SZ	SZ	LW		Ultra low impedance				*		105℃ 2000hours+R	6.3~16
	MZ	MZ	MZ		Ultra low impedance				*		105℃ 2000hours+R	6.3 ~ 25
	WL	WL	WL		Low impedance				*		105℃ 1000~2000hours+R	6.3~ 63
	TL	SJ	LU		Low impedance、High Ripple			*	*		105℃ 1000~5000hours+R	6.3~100
	SC	SC	LZ		Low impedance、High Ripple				*		105℃ 2000~3000hours+R	6.3~100
	WG	WG	WG		Low impedance、High Reliability				*		105℃ 2000~3000hours+R	10~ 100

Products Series Table

■Radial Type Aluminum Electrolytic Capacitors

Classify				Pages	Features	Standard Type	Miniaturization	Long life	Low impedance	High Ripple	Endurance (+R=With ripple)	Rated voltage range (Vdc)
Type	JAMICON	TEAPO	G-LUXON									
Low Impedance	TE	SY	LT		Low impedance、Long life			*	*		105℃ 3000~6000hours+R	6.3~100
	TT	TA	TA		Low impedance、Long life			*	*		105℃ 4000~10000hours+R	6.3~100
	TV	ST	ST		Low impedance、Long life(No water)			*	*		105℃ 4000~10000hours+R	6.3~100
	SA	TT	TT		Low impedance、Long life、Miniaturization(No water)		*	*	*		105℃ 5000hours+R	6.3~50
	TQ	TB	TB		Low impedance、High Ripple			*	*		105℃ 5000~6000hours+R	6.3~35
	TU	TC	TC		Low impedance、Long life			*	*		105℃ 6000~10000hours+R	6.3~100
High Ripple	TC	SQ	LB		High Ripple					*	105℃ 2000hours+R	160~500
	TH	TH	TH		High Ripple 、Low impedance				*	*	105℃ 2000 ~3000hours+R	160 ~ 450
	TJ	SG	LC		High Ripple、Long life			*		*	105℃ 5000hours+R	160~500
	TX	TX	TX		High Ripple、Low impedance			*	*	*	105℃ 3000~5000hours+R	160 ~ 450
High Temperature	TF	SP	SP		High Ripple、Long life			*		*	105℃ 8000~10000hours+R	160~500
	MD	MD	MD		High Ripple、Long life Series			*			105℃ 8000~12000 hour+R	160~500
	TR	SU	SU		High Ripple、Long life			*		*	105℃ 10000~12000hours+R	160~450
	TS	TS	TS		High Ripple、Long life			*		*	105℃ 15000~20000hours+R	160~450
	WB	AK	AK		High Temperature、Ultra Long Life			*			125℃ 2000-5000hours+R	10~450
	WF	AR	AR		High Tem.、Low imp.、Ultra long Life			*	*		125℃ 3000~5000hours+R	25~63
	AY	AY	AY		High Tem.、Ultra long Life、Shock resistance 4(NEW			*	*	*	125℃ 3000~5000hours+R	25~100
	WH	AT	AT		High Temperature、Ultra Long Life Improve			*			130℃ 1000-4000hours+R	10~450
	AU	AU	AU		High Temperature、Ultra Long Life			*			135℃ 1000-3000hours+R	10~63
	AS	AS	AS		Uitra-high temperature correspondenc NEW					*	150℃ 1000-2000hours+R	10~100
Special Purpose	NK	RN	RN		Non-polar Standard	*					85℃ 2000hours+R	6.3~250
	SN	SN	RX		Non-polar Standard	*					105℃ 2000hours+R	6.3~250
	LK	LL	LL		Low Leakage current	*					85℃ 2000 hours+R	10~63
	SB	SB	LX		Low Leakage current	*					105℃ 2000hours+R	6.3~100
	RV	MA	MA		No Spark with DC Overvoltage	*					105℃ 2000hours+R	200~400
	TP	TP	TP		Low impedance、Long life			*			105℃ 6000~20000hours+R	10~35
	TW	TE	TE		LED Lighting、Ultra Long Life			*			105℃ 12000~20000hours+R	160~400

■ Snap-in Type Aluminum Electrolytic Capacitors

Classify				Pages	Features	Standard Type	Miniaturization	Long life	Low impedance	High Ripple	Endurance (+R=With ripple)	Rated voltage range (Vdc)
Type	JAMICON	TEAPO	G-LUXON									
General Purpose	LS	LH	TW		Standard	*					85℃ 2000hours+R	6.3~600
	HS	LG	HW		Standard	*					105℃ 2000hours+R	6.3~600
Long life	LT	LF	LF		Long Life			*	*		85℃ 3000hours+R	10~550
	LB	GA	GA		Long Life、Large Capacitance			*			85℃ 3000hours+R	16~550
	LL	GC	GC		Long Life			*			85℃ 5000hours+R	160 ~ 450
	LN	LN	LN		Long Life NEW			*			85℃ 10000hours+R	400 ~ 450

Products Series Table

■ Snap-in Type Aluminum Electrolytic Capacitors


Classify				Pages	Features	Standard Type	Miniaturization	Long life	Low impedance	High Ripple	Endurance (+R=With ripple)	Rated voltage range (Vdc)
Type	JAMICON	TEAPO	G-LUXON									
Long life	PA	PA	PA		ultra-long life			*			85℃ 10000~18000 hours+R	35 ~ 450
	HT	LJ	LJ		Long Life			*	*		105℃ 3000hours+R	10~600
	HB	GB	GB		Long Life、Large Capacitance			*			105℃ 3000hours+R	16~500
	HL	LQ	LQ		Long Life			*	*		105℃ 5000hours+R	160~550
	GQ	GQ	GQ		Long life、High Ripple NEW			*		*	105℃ 5000hours+R	
	HF	LK	LK		Long Life			*			105℃ 7000hours+R	160~450
	HX	LP	LP		Long Life			*			105℃ 10000hours+R	200~450
	QA	QA	QA		Ultra Long Life			*			105℃ 6000~9000 hour+R	25 ~ 450
Miniaturization	HM	LS	LS		Downsized、Low profile		*				105℃ 2000hours+R	160~450
	LR	LR	LR		Downsized、Low profile			*			105℃ 2000hours+R	400~450
	GG	GG	GG		Ultra-small and thin products NEW			*			105℃ 2000hours+R	400~450
	LM	LM	LM		Miniaturization and thinning products		*	*			105℃ 3000hours+R	400~450
	GS	GS	GS		Ultra-small and thin products NEW		*	*		*	105℃3000hours+R	400~450
Special Purpose	QW	QW	QW		High Temperature ,Long Life Series			*			125℃ 3000 hour+R	25~450
	LA	LA	LA		Charge-Discharge Facility Series	*					105℃ 3000hours+R	350~450
	HV	GD	GD		No Spark with DC Overvoltage	*					105℃3000hours+R	200~ 400

■ Screw Type Aluminum Electrolytic Capacitors


Classify				Pages	Features	Standard Type	Miniaturization	Long life	Low impedance	High Ripple	Endurance (+R=With ripple)	Rated voltage range (Vdc)
Type	JAMICON	TEAPO	G-LUXON									
General Purpose	KP	KP	KP		Standard	*				*	85℃ 2000hours+R	6.3~450
	WP	WP	WP		Standard 、High Ripple	*				*	85℃ 2000hours+R	160~550
	QP	QP	QP		Standard 、High Ripple	*				*	105℃ 2000hours+R	160~500
	RP	RP	RP		Wide temperature range standard	*					105℃ 2000hours+R	10~450
Long life	MP	MP	MP		High voltage、Long life			*			85℃ 5000hours+R	350~450
	XP	XP	XP		High voltage、Long life			*	*		105℃ 5000hours+R	200~450
	JP	JP	JP		High voltage、Long life			*			85℃ 10000hours+R	350~450
	EP	EP	EP		High voltage、Long life			*			105℃ 10000hours+R	350~450

Conductive Polymer Aluminum Solid Capacitors

Radial Type：

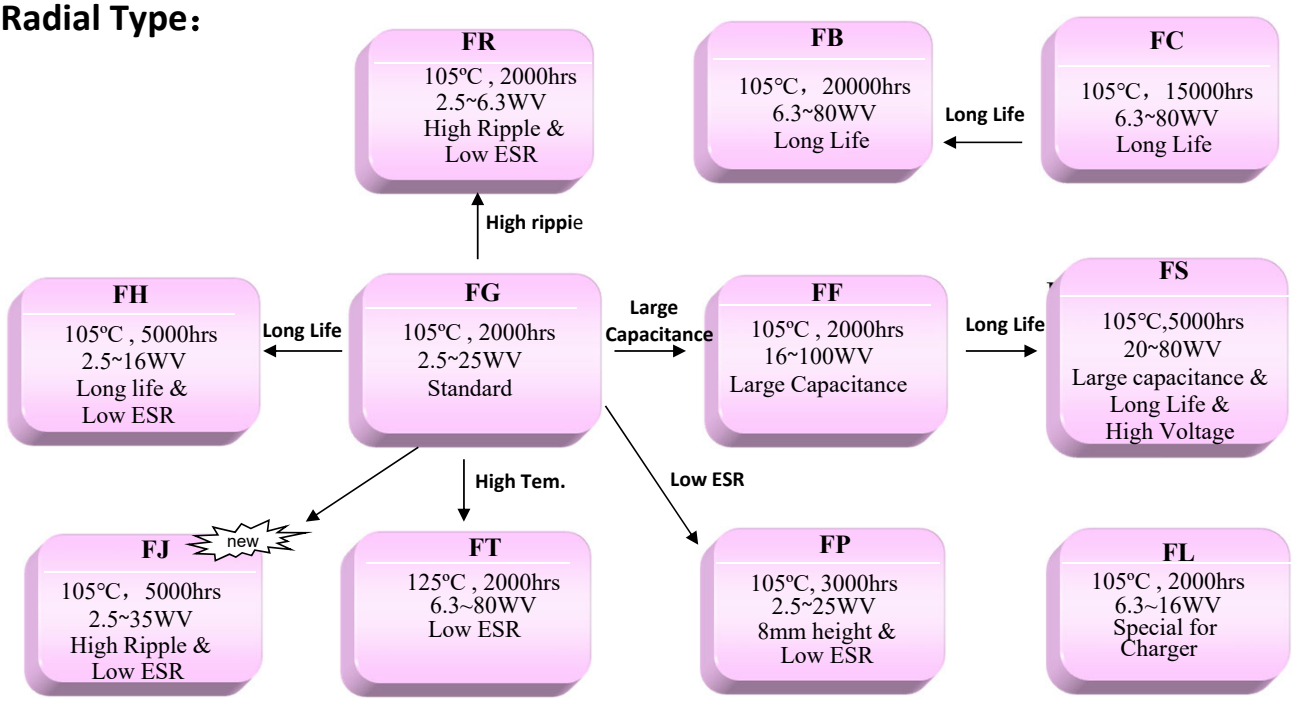


SMD Type:

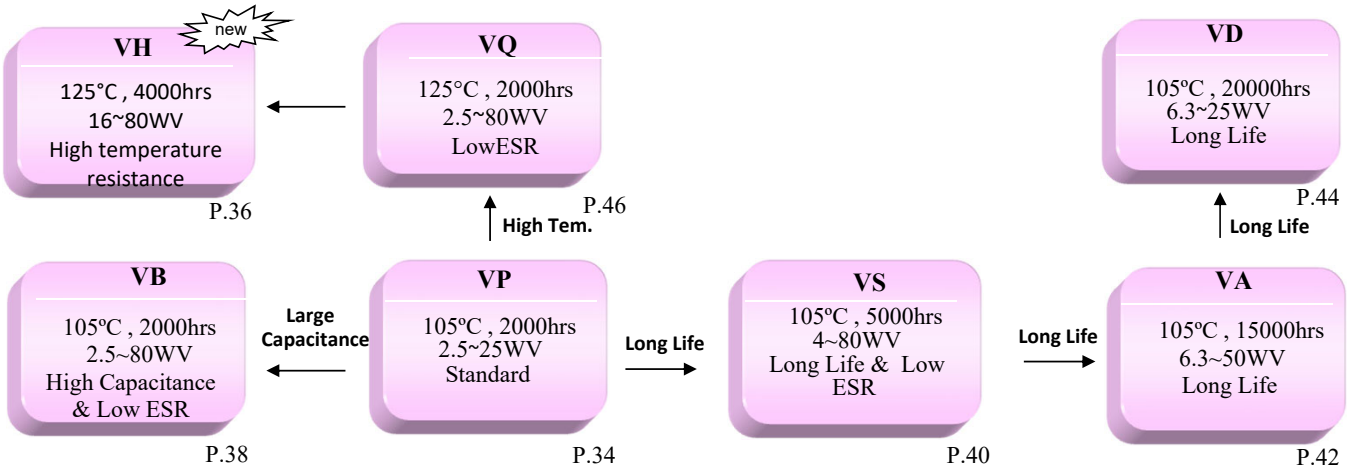


Conductive Polymer Hybrid Aluminum Electrolytic

Radial Type：

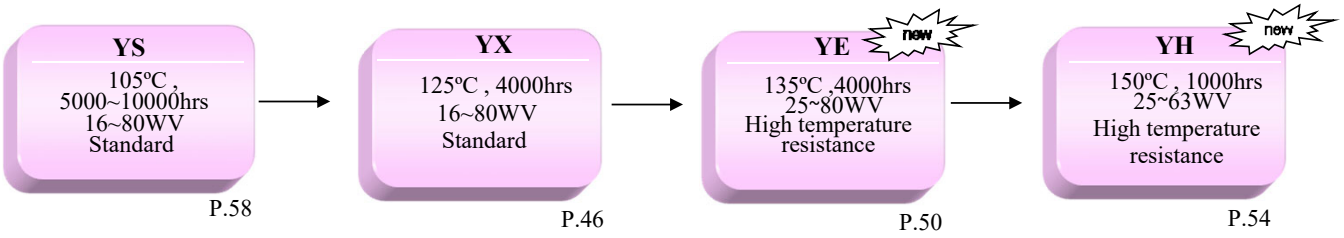


SMD Type：

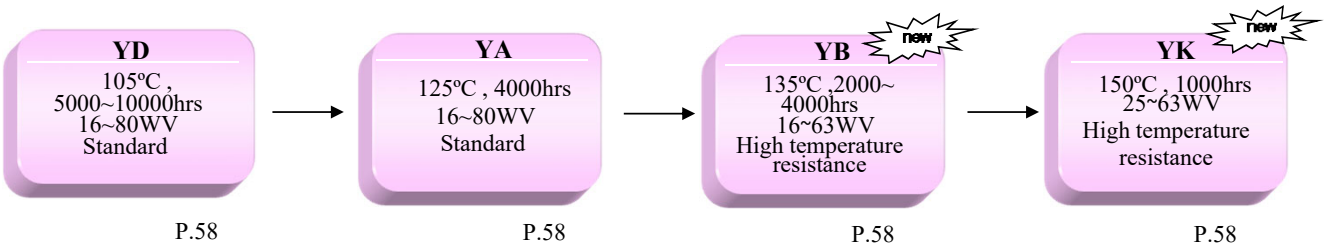


Non-solid Aluminum Electrolytic Capacitors


SMD Type：

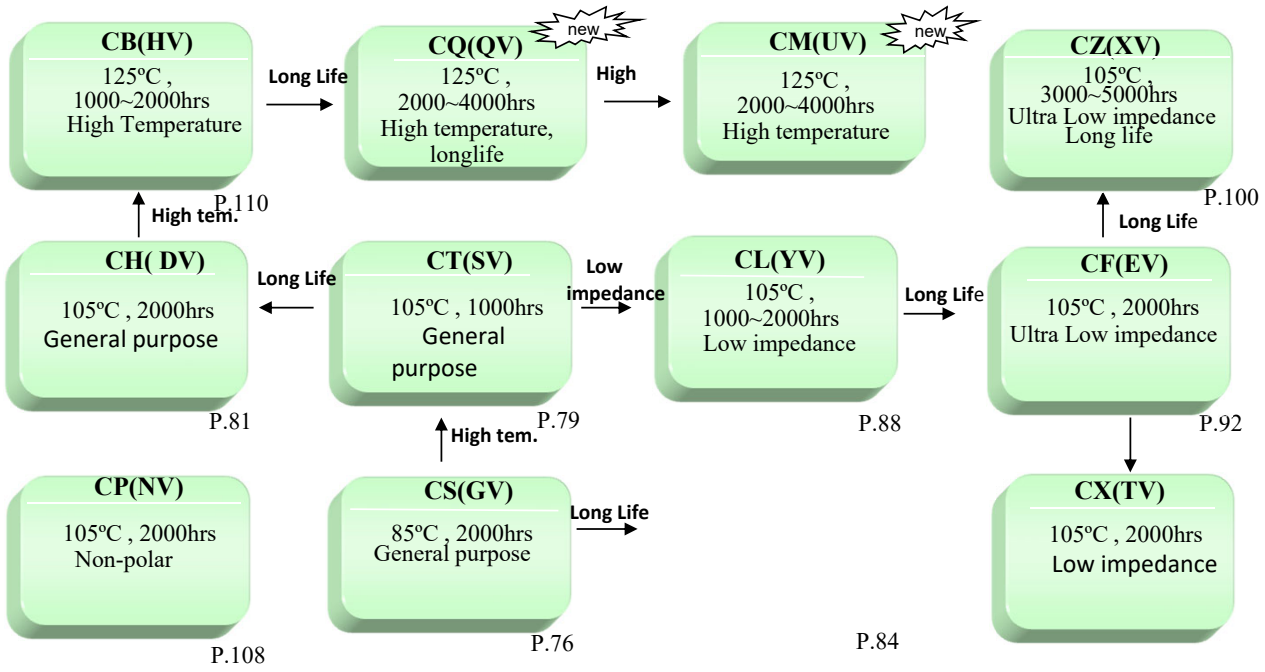


Radial Type--Low Profile:

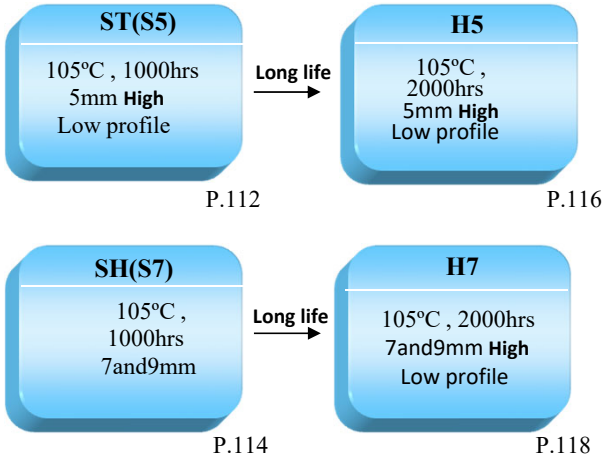

Radial Type--Standard:

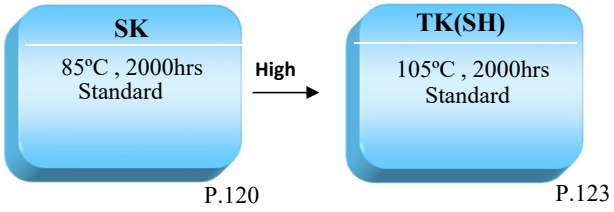


Radial Type--Low Impedance:

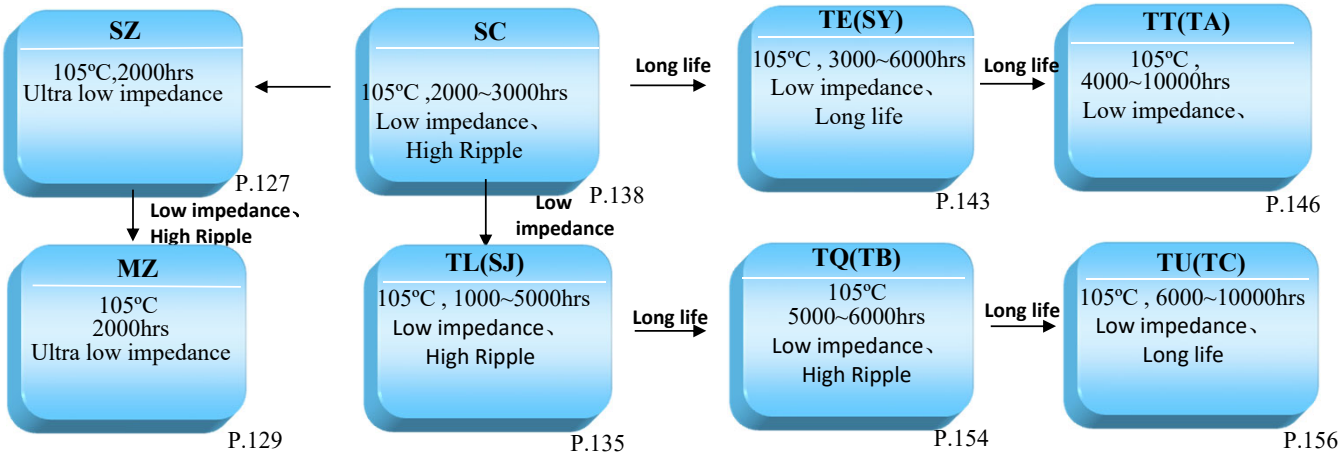


Non-solid Aluminum Electrolytic Capacitors


Radial Type--High Ripple：

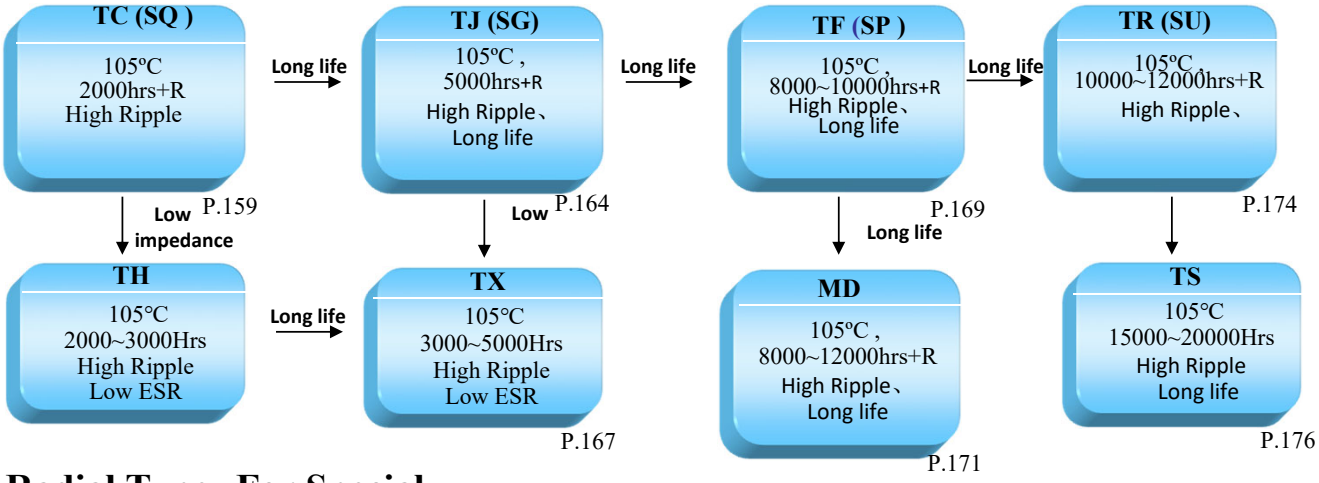

Radial Type--For Special

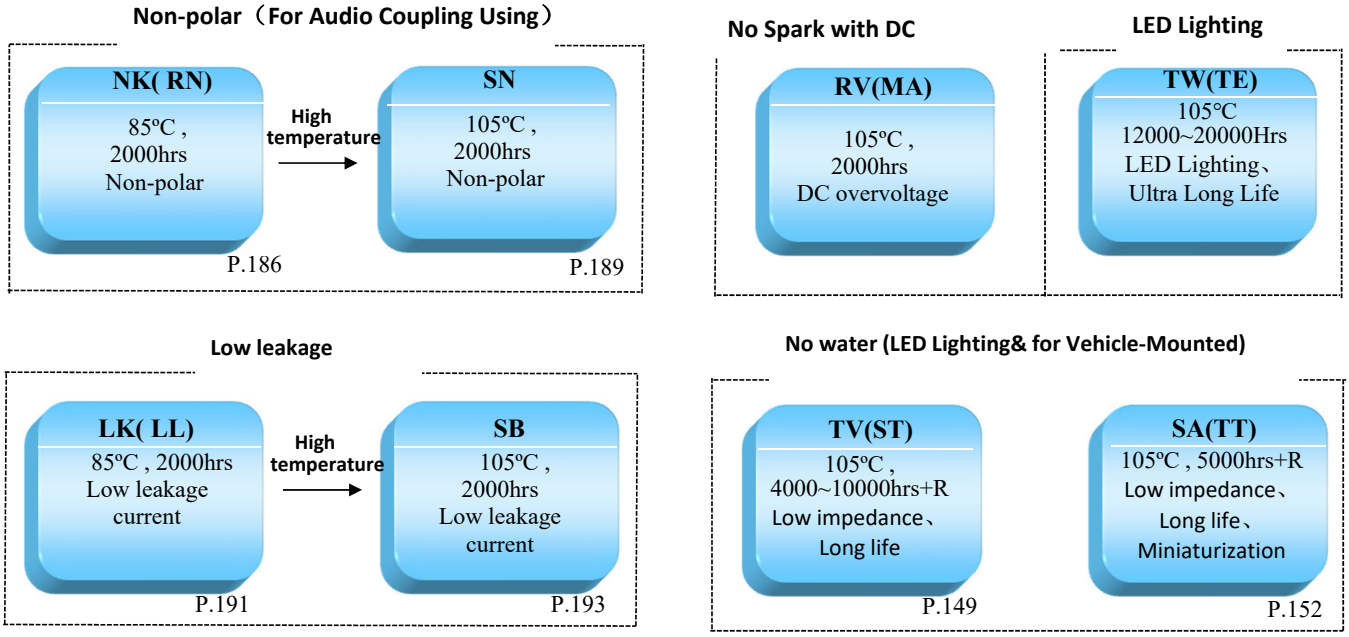


Radial Type--High Temperature：

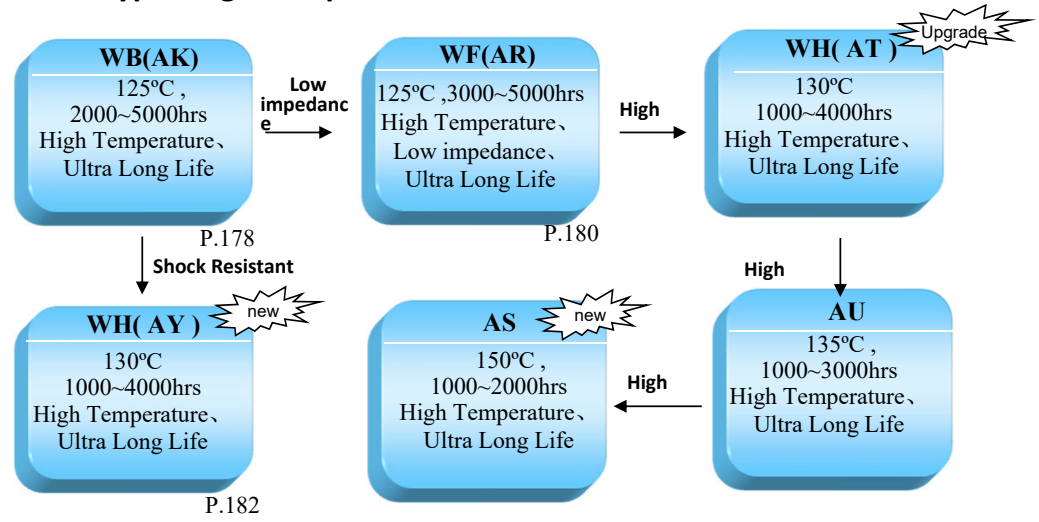



Non-solid Aluminum Electrolytic Capacitors

Snap-in Type -- Long Life :

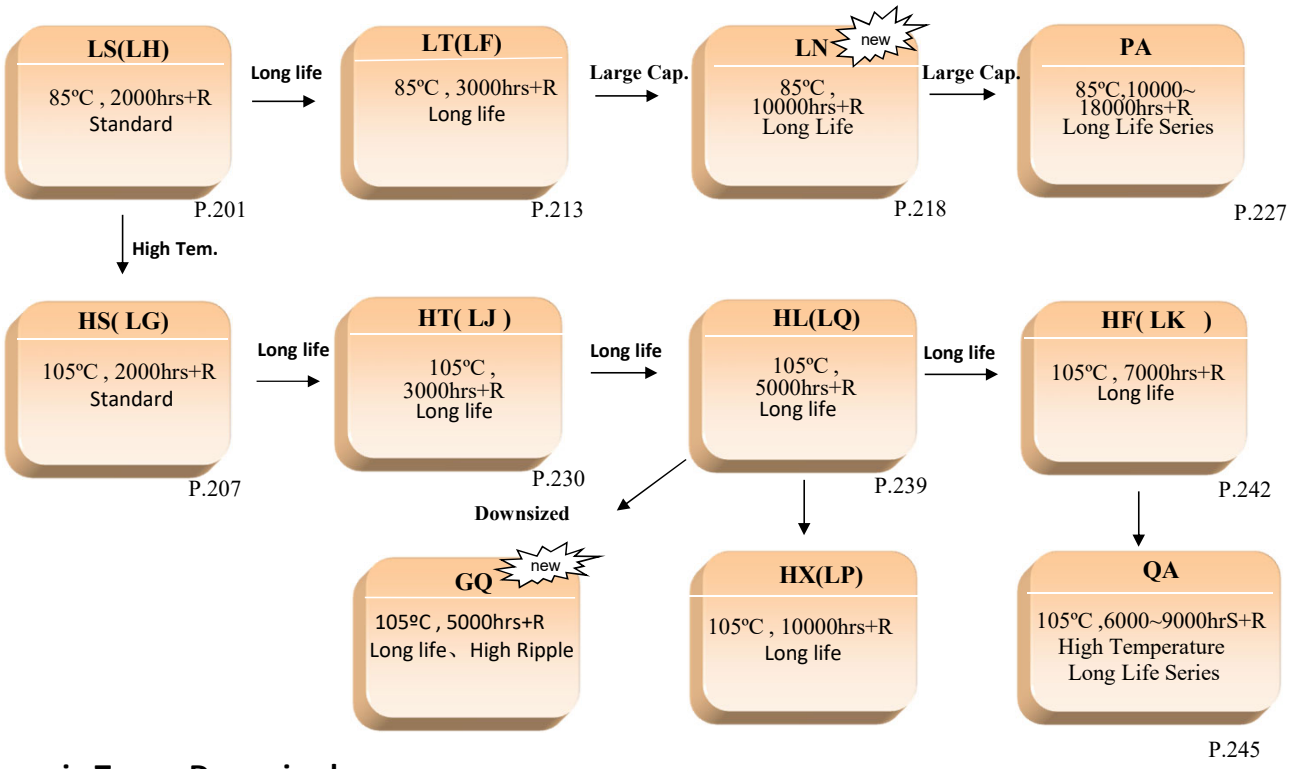


Snap-in Type --Downsized :

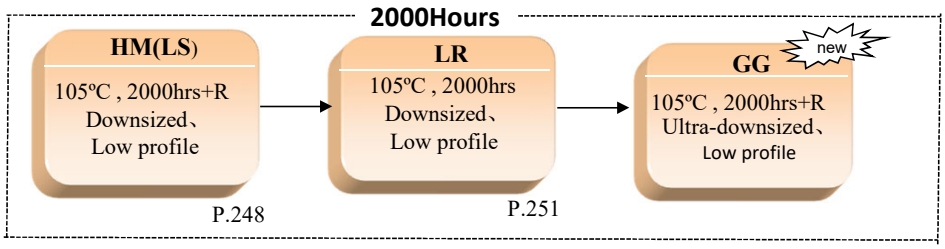

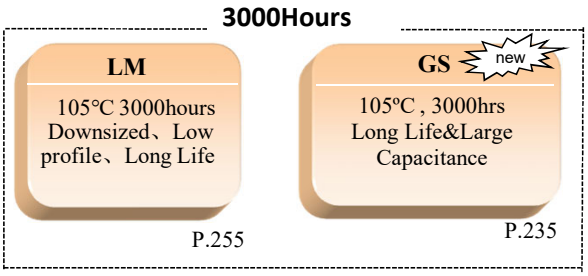


Snap-in Type --For Special Purpose :

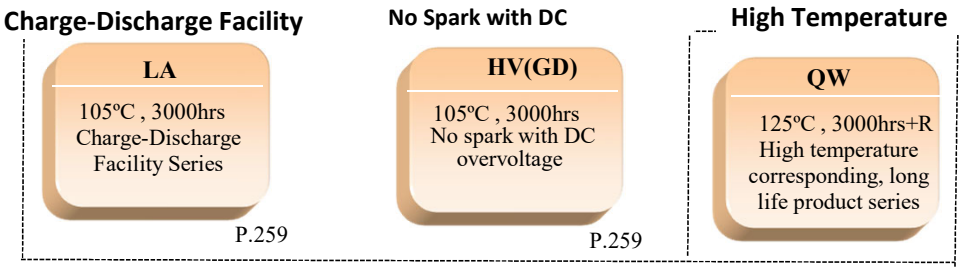

Non-solid Aluminum Electrolytic Capacitors


Screw Type :

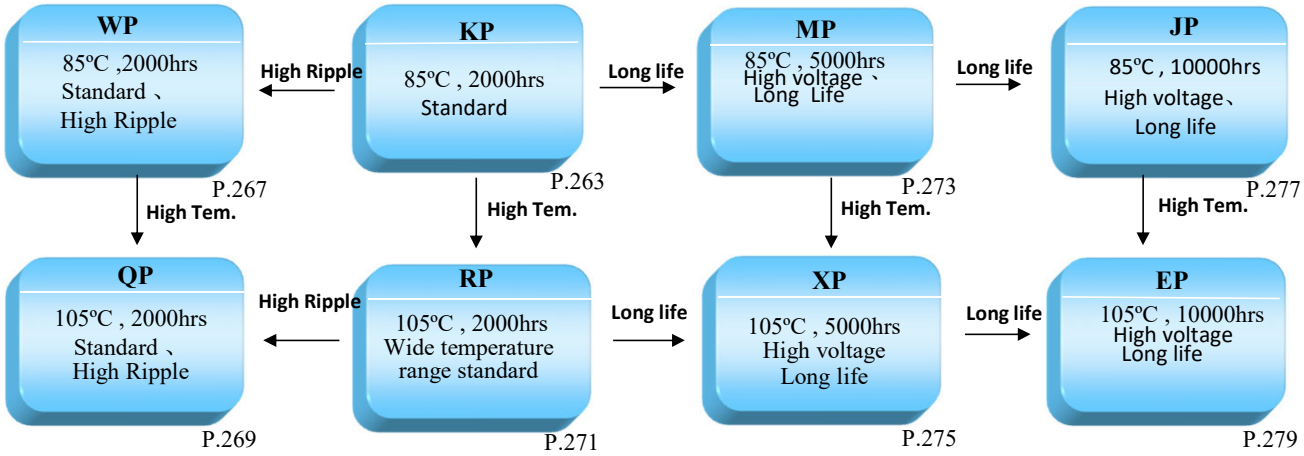

Industry Application

Recommended Applications	POLYMER TYPE&HYBRID TYPE	SURFACE MOUNT	RADIAL LEAD TYPE 6.3~100V	RADIAL LEAD TYPE 160~500V	SNAP-IN TYPE	SCREW TYPE
Charger	FL	CS(GV)、CT(SV)、CH(DV)、CF(EV)、CZ(XV)	SC(SC)、SL(SJ)	TK(SH)	—	—
Lighting Equipment	FG、FF	CB(HV)、CQ(QV)、CM(UV)	TV(ST)、TT(TA)、TU(TC)	TW(TE)、TJ(SG)、TR(SU)	—	—
Network Communication	FG、FF、FB、VD	CF(EV)、CH(DV)、CZ(XV)、CB(HV)、CQ(QV)、CM(UV)	TZ(SJ)、TE(SY)、TT(TA)、TU(TC)	TJ(SG)、TF(SP)、TR(SU)	—	—
Power Supply	FG、FC、FT、FJ、VQ、YX、YE	CS(GV)、CT(SV)、CH(DV)、CF(EV)、CZ(XV)	TK(SH)、TE(SY)	TK(SH)、TJ(SG)	—	—
Control Panel	VP、FG	CS(GV)、CT(SV)、CH(DV)	TK(SH)、SC(SC)	TK(SH)	—	—
Audio	VP、FG	CS(GV)、CH(DV)、CF(EV)、CZ(XV)、CP(NV)	SC(SC)、TK(SH)、SK(SK)	—	LS(LH)、HS(LG)、HT(LJ)、LN	—
Intelligent Electric Meters Intelligent Water Meter Intelligent Gas Meter	FH、FS、YD、YA	CF(EV)、CZ(XV)、CH(DV)	TK(SH)、TE(SY)、TT(TA)	TK(SH)、TJ(SG)、TC(SQ)	HS(LG)、HT(LJ) GQ	—
UPS	FG、FH	CH(DV)	—	—	HM(LS)、HF(LK)、HX(LP)	MP
Inside and Outside Accessories for Automotive	YD、YA	CF(EV)、CZ(XV)、CH(DV)	SK(SK)、TK(SH)、TZ(SJ)、TE(SY)、WH(AT)、WF(AR) AY、AS	—	—	—
Ethernet Router Interchanger	FG、FH	CH(DV)、CF(EV)	SC(SC)、TT(TA)	—	—	—
Servosystem	FP、FH、FB、FJ、VH	CH(DV)、CZ(XV)	—	TJ(SG)、TR(SU)	LM、HL(LQ) GQ	MP、XP
Plastic Working Equipment	—	—	—	—	LM、HL(LQ) GQ、GS	MP、XP
Electric Car Equipment Charging pile	FG、VP、YA、YD、YB、YE、YH、YK	CH(DV)			HS(LG)、HL(LQ) GQ	MP、XP
Inverter	FT、FS	CH(DV)、CF(EV)、CZ(XV)	—	TR(SU)	HT(LJ)、HL(LQ)、HF(LK)、HX(LP)	MP、XP、EP
Inverter Air-Conditioner Inverter Washing Machine Inverter Refrigerator	VS、VA、FH、FB	CH(DV)、CF(EV)、CZ(XV)	TK(SH)	TF(SP)、TR(SU)	HS(LG)、HL(LQ)、HX(LP)、LM LT(LF)、GQ、GS	MP、XP、EP
Printer Facsimile Machine	VS、VA、FH、FB	CH(DV)、CF(EV)、CZ(XV)	—	TC(SQ)、TJ(SG)	HS(LG)、HM(LS) GS	—
Elevator	—	CH(DV)	SK(SK)、TK(SH)、TV(ST)、TT(TA)、TE(SY)	TK(SH)、TJ(SG)、TF(SP)	HS(LG)、LS（LH）HM(LS)、HL(LQ)、HX(LP)、GQ、GS	—
Mainboard	FG、VB、VS、FH、FJ	CS(GV)、CT(SV)、CH(DV)	SK(SK)、TK(SH)	SK(SK)、TK(SH)	—	—

Part Number System

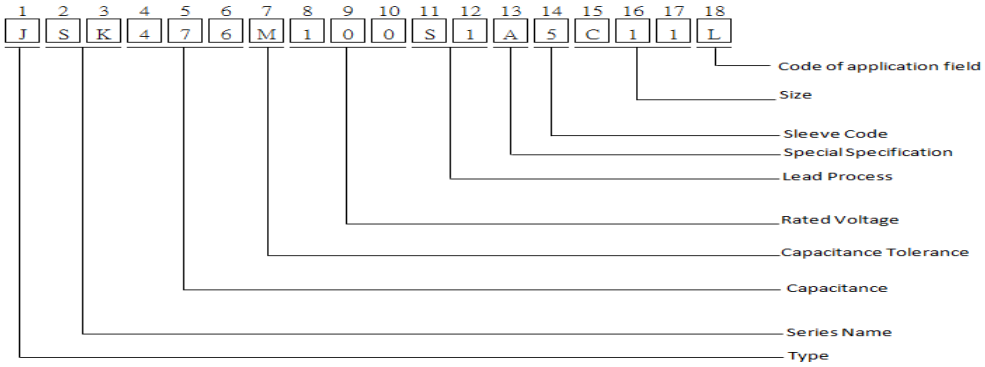

Code 1 Type

Code	Model Type
J	Jamicon Radial Type (PET sleeve)
K	Teapo Radial Type (PET sleeve)
V	SMD (V-chip) Type (Nylon coating)
S	TEAPO Snap-in Type (PET sleeve)
T	JAMICON Snap-in Type (PET sleeve)
H	JAMICON Snap-in Type (No Insulating base, PET sleeve)
P	TEAPO Radial Type / SMD Type Conductive Polymer Aluminum Solid Capacitors
R	TEAPO Radial Type / SMD Type Conductive Polymer Hybrid Capacitors
N	Screw Type(PVC sleeve)
B	Radial Type special for CP line(PET sleeve)
M	Radial Type 8 φ pitch =2.5mm(PET sleeve)
G	G·LUXON Radial Type (PET sleeve)
Y	JAMICON Radial Type / SMD Type Conductive Polymer Aluminum Solid Capacitors
W	JAMICON Radial Type / SMD Type Conductive Polymer Hybrid Capacitors
Z	Teapo Snap-in Type (No Insulating base, PET sleeve),the last code "0"is for G-LUXON Snap-in Type (No Insulating base, PET sleeve)

Code 2~3 Series Name (as content page 2 to page 4)

Code 4~6 Capacitance

Capacitance(uf)	0.47	4.7	47	470	4700	47000	470000	4700000	47000000	470000000
product code	474	475	476	477	478	479	47A	47B	47C	47D

Code 7 Capacitance Tolerance

A： - 8~ + 32%	B： - 5~ + 10%	C： + 10~ + 30%	D： - 40~ + 0%	W： - 15~ + 0%	X： - 15~ + 5%
G： - 30~ + 0%	H： - 5~ + 15%	I： - 20~ + 0%	J： - 5~ + 5%	Q： - 10~ + 30%	R： - 0~ + 20%
M： -20~ + 20%	N： - 30~ + 30%	O： - 20~ + 10%	P： - 0~ + 30%	K： - 10~ + 10%	L： - 15~ + 15%
S： - 0~ + 50%	T： - 10` + 50%	U： - 10~ + 75%	V： - 10~ + 20%	E： - 12~ + 20%	F： - 5~ + 20%
Y： - 10~ + 150%	Z： - 20~ + 80%				

Code 8~10 Rated Voltage

Rated Voltage(WV)	2.5	5	6.3	63	100	450
product code	2R5	005	6R3	063	100	450

Code 11~12 Lead Process

Code / processing form	Code 11	Code 12	Description
Standard	A	1	Screw type standard type
	S	0	Standard SMD type
		1	Radial standard type (available for flat rubber cover) & Snap-in standard type (available for terminal length 4.0±1mm)
		A	Snap-in standard type (available for terminal length 5.8±1mm) & SMD type with vibration-resistant base
Ammo tape	T	1	Standard ammo tape (pitch 5mm for dia .~ 13mm)
		2	Ammo tape with straight lead (available for dia. 4~8mm)
		4	Ammo formed tape with pitch 2.5mm (available for dia.4~5mm)
Reel tape	R	1	Standard reel tape (pitch 5mm for dia.~ 10mm)
		2	Reel tape with straight lead (available for dia. 4~8mm)
		3	Reel formed tape with pitch 2.5mm (available for dia.4~5mm)
Straight cut	C	3	Straight cut lead with L : 3.2+/-0.5mm
		5	Straight cut lead with L : 4.0+/-0.5mm
		7	Straight cut lead with L : 5.0+/-0.5mm
Kink(Crimp)cut	K	2	Kink cut lead with L : 4.5+/-0.5mm
Formed cut	F	6	Forming cut lead with L : 4.0+/-0.5 (Pitch : 5mm)

Code 13 Special Specification

A	SMD Standard type & Radial standard type with flat rubber cover & Snap-in standard type	J	S-protection	S	spacer special DIP special requirement	2	Life & ESR special
B	DF (tanδ)special	K	Above life specified in catalog	T	length of body special fortolerance	3	Life & Impedance special
C	ESR special	L	Pins or Wire diameter	U	Pack special	4	Life & Ripple current special
D	Impedance special	M	Customer requirements	V	Sleeve special	5	Life & LC special
E	Ripple current special	N	Pitch special	W	Capacitance special	6	life & rubber cover or capacitor cover plate
F	LC special	O	LC & ESR or Impedance special	X	DF & LC & ESR or Impedance special	7	DF & ESR or Impedance special
G	Radial standard type with convex rubber cover & Snap-in standard type	P	Under life specified in catalog	Y	RC & LC & ESR or Impedance special	8	DF & RC special
H	Customer requirements	Q	DF & Ripple current & ESR or Impedance special	Z	Frequency & ESR or Impedance special	9	DF & LC special
I	RC & LC special	R	Shelf is 1000Hrs	1	Life & DF special	0	RC & ESR or Impedance special

Code 14 Sleeve Code（please contact us if the sleeve code in the form cannot corresponding with your requirement.）

代碼	Color	JAMICON	TEAPO
1	Dark blue with white printing	/	SK
5	Black with white printing	NK,SK,TE,TQ,TT,TV,TP,TR,TW,SA,RV,HF,HM,HS,HT,LS,HV,HX,WB,WH,LB,HB,KP,MP,WP,QP,RP,XP,JP,EP,	SH,SG,SP,SB,SY,SJ,RN,SQ,AK,ST,TA,SU,TB,LH,LG,LJ,LF,LQ,LM,TE,LS,LK,TT,S5,S7,H5,H7,KP,WP,QP,MP,XP,JP,MA,TP,LA,GA,GB
6	Black with golden printing	TU,WF	TC
C	Green with golden printing	SL,WL,TF	SC,WL
H	Royal blue with golden printing	/	SZ
N	SMD standard pack & Polymer(Hybrid) type	CA,CD,CE.CJ.CK.CN.CU,CS,CW,CT,CH,CL,CF,CZ,CB,CP,VP,VC,VB,VS,VA,VD,VQ,FG,FR,FF,FL,FS,FP,FH,FC,FB,FT,YA,YX,YD,YS	XV,LV,MV,AV,PV,RV,WV,GV,FV,SV,DV,YV,EV,XV,HV,NV,VP,VC,VB,VS,VA,VD,VQ,FG,FR,FF,FL,FS,FP,FH,FC,FB,FT,YA,YX,YD,YS
M	Black with blue printing	SH,ST,TK,TC	/
A	Green with black printing	LK,WB	LL
9	Green with silvery printing	MZ	MZ
B	Brown with white printing	TH,TL,HL,LL,HV	TH ,GC,GD
Z	Brown with silver printing	TX,TJ,	TX
7	Green with white printing	LT,HT	/

Code 15~17 Case Size (Please contact us if the case size is required and not shown in the table.)

Code 15 Diameter

Code	A	B	C	D	E	F	G	8	H	9
Case size	3	4	5	5.5	6.3	7.3	8	8.2	10	10.2

Code	J	K	L	6	M	N	7	P	Q	R
Case size	12	12.5	13	14.5	16	18	18.5	20	22	25

Code	S	T	U	V	W	X	Y	Z	1	2
Case size	30	35	40	45	51	64	77	90	101	35.5

Code 16~17 Length

For ECAP-DIP & POLYMER(HYBRID)-DIP & SNAP-IN & SCREW TYPE ：

Code	05	07	09	10	1A	11	1B	12	1C	13
Length	05	07	09	10	10.5	11	11.5	12	12.5	13

Code	14	15	16	17	18	20	25	30	3B	32
Length	14	15	16	17	18	20	25	30	31.5	32

Code	35	3F	36	40	45	50	55	60	65	70
Length	35	35.5	36	40	45	50	55	60	65	70

Code	75	80	90	96	A0	B5	C1	D0	E4	F5
Length	75	80	90	96	100	115	121	130	144	155

For V-CHIP SMD

Code	01	02	03	04	05	06	07	08
Length	5.4	6.2	10.2	7.7	13.5	16、16.5	12.5	5.8

For POLYMER(HYBRID) SMD

Code	A1	A2	A3	A4	A5	A6	A7	A8	A9
Length	5.8	6.0	6.7	7.7	10.2	10.4	12.0	12.2	9.0


Code 18 Code of application field

H: Intelligent instrument	R:Medical	X:Weekly date code	6:Industrial equipment / inverter
K:TEAPO	S:Auto grade	0:G.LUXON	L：JAMICON

Ⅰ、Anti-vibration Structure for SMD Type:

Available for SMD φ6.3x7.7 ~ φ18 of automotive application (Part Number No12 code: A)

1.SMD Seismic Structure Diagram:

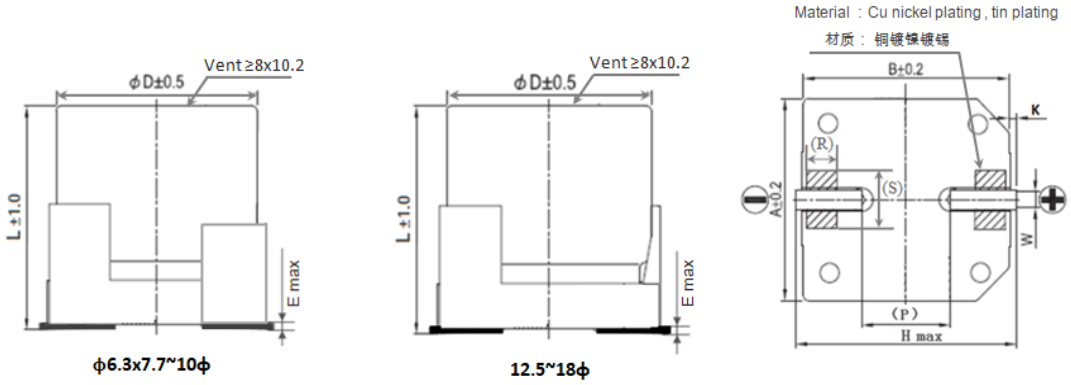

The diagram is marking " ( ) " for reference dimension.
Please consult with us about different requirements for the supportive soldering area on the base plate.


2. Dimensions :

Unit: mm

Size	ΦD	L	A	B	H	E	W	P	K	R	S
E04	6.3	7.7	6.6	6.6	7.8	0.3	0.65±0.1	2.1±0.2	0.35±0.20	1.1	2.5
G03	8	10.2	8.3	8.3	10.0	0.3	0.90±0.2	3.1±0.2	0.50±0.20	1.3	3.7
H03	10	10.2	10.3	10.3	12.0	0.3	0.90±0.2	4.6±0.2	0.50±0.20	1.6	3.7
K05	12.5	13.5	13.0	13.4	15.0	0.4	1.20±0.2	4.8±0.2	0.70±0.30	2.5	4.4
K06	12.5	16.0	13.0	13.4	15.0	0.4	1.20±0.2	4.8±0.2	0.70±0.30	2.5	4.4
M06	16.0	16.5	17.0	17.0	19.0	0.4	1.20±0.2	6.4±0.2	0.70±0.30	3.3	6.0
M09	16.0	21.5	17.0	17.0	19.0	0.4	1.20±0.2	6.4±0.2	0.70±0.30	3.3	6.0
N06	18.0	16.5	19.0	19.0	21.0	0.4	1.20±0.2	6.4±0.2	0.70±0.30	4.0	6.0
N09	18.0	21.5	19.0	19.0	21.0	0.4	1.20±0.2	6.4±0.2	0.70±0.30	4.0	6.0

Ⅱ、SMD recommended pad size:

1.Recommend the bonding pad size .




PCB board solder tray

Unit: mm

Size Code	a	b	c
Φ4	1.0	1.6	2.6
Φ5	1.4	1.6	3.0
Φ6.3	1.9	1.6	3.5
Φ8x6.2	2.1	1.6	4.0
Φ8	3.0	2.5	3.5
Φ10	4.0	2.5	4.0
Φ12.5	4.0	3.2	6.0
Φ16	6.0	3.2	7.0
Φ18	6.0	3.2	8.0

2. Recommend the bonding pad size (Anti-vibration Structure)：



PCB board solder tray

Unit: mm

Size Code	a	b	c
Φ6.3x7.7	1.2	3.0	3.6
Φ8x10.2	2.5	4.3	4.0
Φ10x10.2	3.5	4.3	4.7
Φ12.5	4.0	6.0	6.0
Φ16	5.5	7.5	7.5
Φ18	5.5	7.5	8.0

Taping specifications for Raidal Type:

Fig.1：Code T1/R1 : Ammo / Reel Tape (Φ4 – Φ6.3)

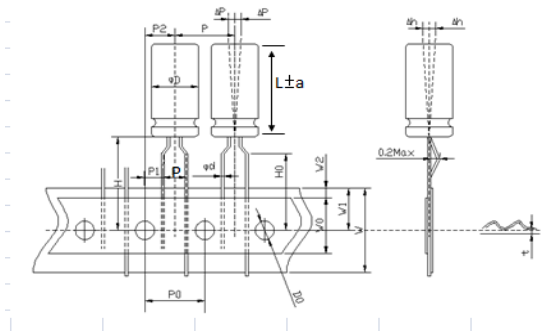


Fig.2：Code T1/R1 : Ammo / Reel Tape (Φ8)(P3=2.0~2.7, θ=110°±15°)

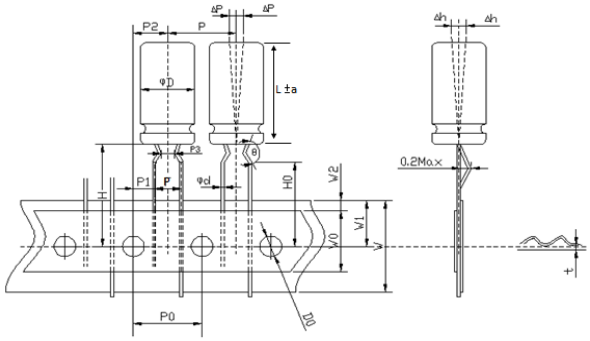


Fig.3：Code T1/R1 : Ammo / Reel Tape (Φ10)

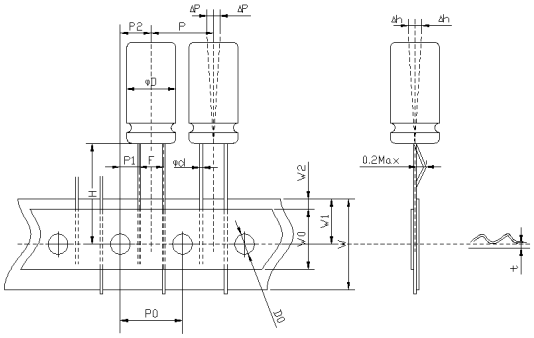


Fig.4：Code T1 : Ammo Tape (Φ13~Φ18)

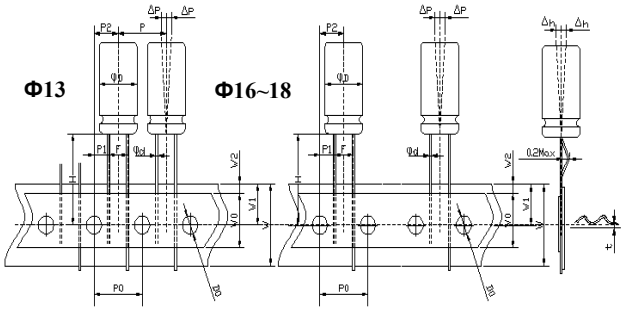


Fig.5：Code T2/R2 ，Φ4 ~ Φ8


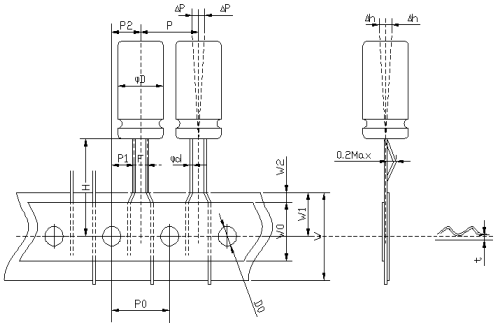






Fig.6：Code T4/R3 : Ammo / Reel Formed Tape (Φ4～Φ5／pitch 2.5mm)

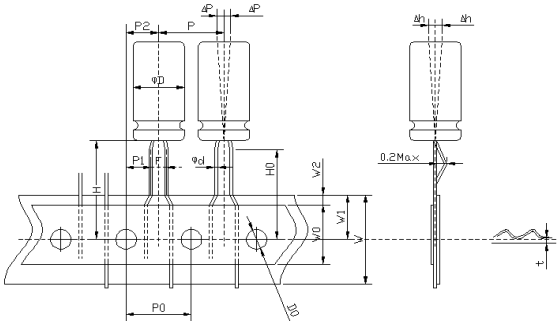

unit：mm

Code	Symbol	φd	P	P0	P1	P2	F	W	W0	W1	W2	H	H0	D0	△P	△h	t
	Tolerance	±0.05	±1.0	±0.3	±0.5	±1.0	+0.6/－0.2	±0.5	min	±0.5	max	±0.5	±0.5	±0.3	max	max	±0.3
T1/R1	4x5	0.45	12.7	12.7	3.85	6.35	5.0	18.0	8.0	9.0	2.0	18.5	16.0	4.0	0.2	0.2	0.6
	5x5~11	0.45or0.5	12.7	12.7	3.85	6.35	5.0	18.0	8.0	9.0	2.0	18.5	16.0	4.0	0.2	0.2	0.6
	6.3x5~11	0.45or0.5	12.7	12.7	3.85	6.35	5.0	18.0	8.0	9.0	2.0	18.5	16.0	4.0	0.2	0.2	0.6
	Tolerance	±0.05	±1.0	±0.3	±0.7	±1.0	+0.6/－0.2	±0.5	min	±0.5	max	±0.5	±0.5	±0.3	max	max	±0.3
	8x5~30	0.45~0.6	12.7	12.7	3.85	6.35	5	18.0	8.0	9.0	2.0	18.5	16.0	4.0	0.2	0.2	0.6
	Tolerance	±0.05	±1.0	±0.3	±0.5	±1.0	+0.6/－0.2	±0.5	min	±0.5	max	±0.5	—	±0.3	max	max	±0.2
	10x10~30	0.6	12.7	12.7	3.85	6.35	5	18.0	8.0	9.0	2.0	18.5	—	4.0	0.2	0.2	0.7
	Tolerance	±0.05	±1.0	±0.3	±0.7	±1.3	+0.6/－0.2	±0.5	min	±0.5	max	±0.5	—	±0.3	max	max	±0.3
	12.5x15~25	0.6	15	15	5.00	7.50	5.0	18.0	8.0	9.0	2.0	18.5	—	4.0	0.2	0.2	0.7
	13x13~40	0.6	15	15	5.00	7.50	5.0	18.0	8.0	9.0	2.0	18.5	—	4.0	0.2	0.2	0.7
	16x16~40	0.8	30	15	3.75	7.50	7.5	18.0	8.0	9.0	2.0	18.5	—	4.0	0.2	0.2	0.7
	18x20~32	0.8	30	15	3.75	7.50	7.5	18.0	8.0	9.0	2.0	18.5	—	4.0	0.2	0.2	0.7
Code	Symbol	Φd	P	P1	P0	P2	F	W	W0	W1	W2	H	—	D0	△p	—	t
	Tolerance	±0.05	±1.0	±0.5	±0.3	±1.0	+0.6/-0.2	±0.5	min	±0.5	max	±0.5	—	±0.3	max	—	±0.2
T2/R2	4x5～7	0.45	12.7	12.7	5.6	6.35	1.5	18	8	9	2.0	18.5	—	4	0.2	—	0.6
	5x5～11	0.45or0.5	12.7	12.7	5.35	6.35	2	18	8	9	2.0	18.5	—	4	0.2	—	0.6
	6.3x5～11	0.45or0.5	12.7	12.7	5.1	6.35	2.5	18	8	9	2.0	18.5	—	4	0.2	—	0.6
	8x5～20	0.6	12.7	12.7	4.6	6.35	3.5	18	8	9	2.0	18.5	—	4	0.2	—	0.6
Code	sign	Φd	P	P0	P1	P2	F	W	W0	W1	W2	H	H0	D0	△P	△h	t
	Tolerance	±0.05	±1.0	±0.3	±0.5	±1.0	+0.6/－0.2	±0.5	min	±0.5	max	±0.5	±0.5	±0.3	max	max	±0.3
T4/R3	4x5~4x7	0.45	12.7	12.7	5.1	6.35	2.5	18.0	8.0	9.0	2.0	18.5	17.0	4.0	0.2	0.2	0.6
	5x5~5x11	0.45or0.5	12.7	12.7	5.1	6.35	2.5	18.0	8.0	9.0	2.0	18.5	17.0	4.0	0.2	0.2	0.6

Cut/Formed Lead For Radial Lead Type：

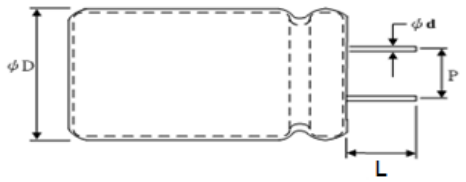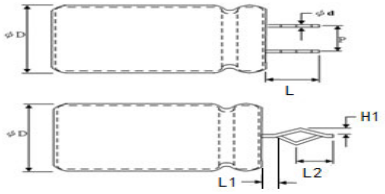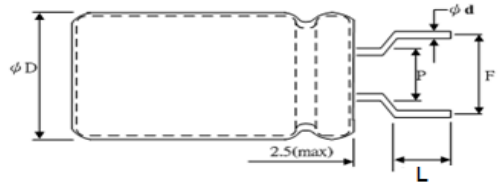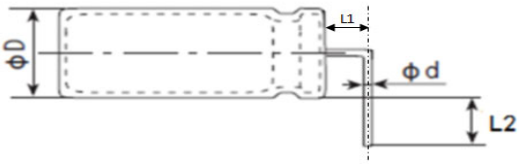Shape	Suitable size	Shape	Suitable size
Code C5：Straight Cut 	ΦD=4~18	Code K2：Kink cut，& Crimping 	ΦD=4~18
CodeF*：Molding Truncation type 	ΦD=4~8	CodeV*/O*/Z*/X*： Horizontal processing 	ΦD=4~18

unit：mm

C	Code	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	G	H
	L	2.5	2.8	3.2	3.4	4.0	4.5	5.0	5.5	6.5	7.0	8.0	10.0	3.6	6.0	3.2	4.2	2.4
	Code	J	K	L	M	N	P	Q	R	S	T	U	V	X	Y	Z	W	
	L	4.2	3.7	12.0	2.0	2.2	2.5	13.5	9.0	20.0	16.0	18.0	3.0	13.0	12.5	15.0	3.1	

P	Code	1	2	3
	L	11.0	3.8	14.0

K	Code	1	2	3	4	5	6	7	9
	L	3.2	4.5	5.0	3.5	4.0	4.3	3.5	3.2
	Code	A	B	D	E	F	H	K	L
	L	3.3	3.6	3.6	3.3	18.0	7.0	6.8	4.0

X	代码	3
	L1	1.8±0.2
	L2	3.0±0.2

F	Code	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	G	H
	L	3.0	3.1	3.2	3.4	3.5	4.0	4.8	4.5	3.2	6.0	4.3	5.0	3.0	3.6	5.0	3.0	6.5
	Code	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	Z	I	
	L	3.7	2.5	2.2	1.5	2.9	3.7	7.0	4.2	9.0	2.8	3.7	2.4	4.0	3.1	4.5	4.0	

V	Procesn umber	1	2	6	J	Q	F	8	N
	L1	1.25±0.25	2.5±0.5	2.5±0.25	1.0±0.5	1.5±0.5	1.25±0.25	2.0±0.5	2.2±0.5
	L2	2.6±0.3	3.5±0.5	4.1±0.5	3.85±0.25	3.0±0.5	11.5±0.5	4.0±0.5	＜3.6
	Procesn umber	5	P	3	Y	R	G	9	Z
	L1	2.5±0.25	5.0±0.5	2.5±0.25	1.0±0.5	1.5±0.5	1.0±0.2	2.0±0.5	2.2±0.5
	L2	3.25±0.25	3.25±0.25	4.1±0.5	3.85±0.25	3.0±0.5	2.4±0.3	4.0±0.5	＜3.6
	Procesn umber	B	S	U	H	D	O	E	M
	L1	2.5±0.5	2.0±0.5	3.5±0.3	1.0±0.2	2.0±0.5	2.5±0.5	1.5±0.2	3.3±0.2
	L2	3.3±0.5	3.5±0.3	5.0 +0,-0.5	2.4±0.3	6.7±0.5	7.0±0.5	2.25±0.25	3.25±0.25
	Procesn umber	X	W	V	7	C	A	4(Don't cut the foot）	T
	L1	2.5±0.5	2.0±0.5	1.0±0.5	2.0±0.5	＜1.6(containΦd)	2.5±0.3	4.0±0.5	＜2.0
	L2	5.8±0.5	2.5±0.5	3.5±0.3	3.2±0.4	2.0±0.5	3.7±0.3	15.5±0.5	9.3±0.5

O	Procesn umber	1	2	5	8	B	G	H	M
	L1	2.0±0.3	1.±0.2	1.2±0.25	1.0±0.3	1.5±0.5	1.5±0.5	1.5±0.5	3.0±0.5
	L2	3.7±0.3	3.7±0.3	2.0±0.2	2.3±0.2	6.5±0.2	3.2±0.2	5.0±0.2	6.0±0.5


Z	Procesn umber	3	C	I	U	4	6	7	8
	L1	2.0+0/0.5	2.5±0.5	1.0±0.2	1.2±0.2	2.5±0.5	1.0±0.2	4.0±0.5	2.5±0.3
	L2	3.85±0.25	4.6±0.5	3.0±0.2	2.8±0.3	3.85±0.25	3.80±0.2	3.4±0.5	3.5±0.3

Note: if the above size can not satisfied your need please contact us.

Available Terminals For SNAP-IN Type：


Standard product code：S1

apply to size Φ22~35

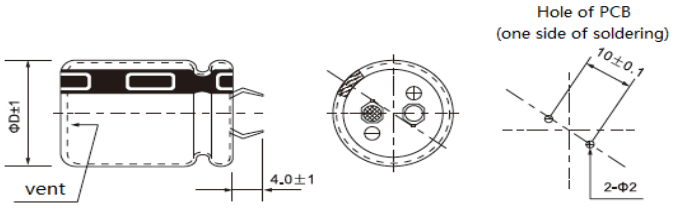


Standard product code：SA(the NO.13 code is A)

apply to size Φ22~35

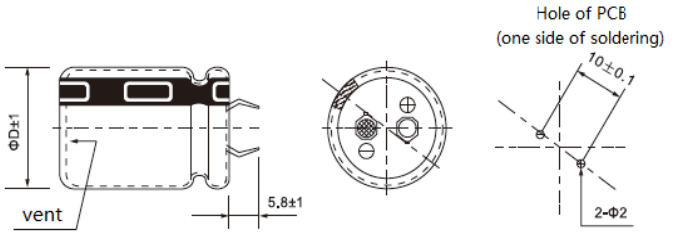


Code：LL

apply to size Φ25~35

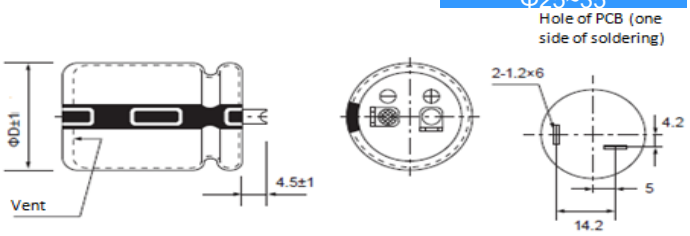


Three terminal code：L3

apply to size Φ25~35

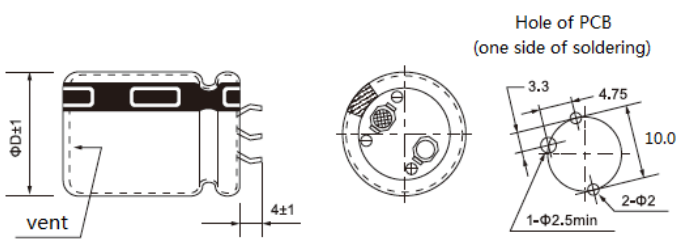


Horizontal code：V*

apply to size Φ22~35

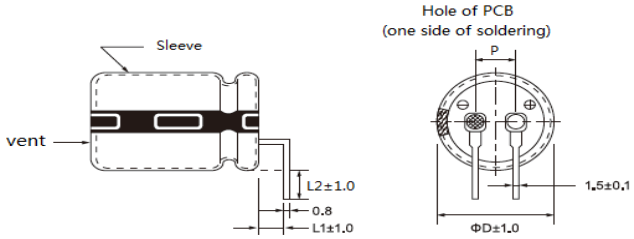


Four terminal code：L4

apply to size Φ35~45

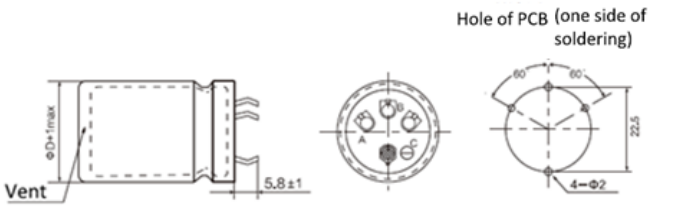


代码：LT

apply to size Φ22~35

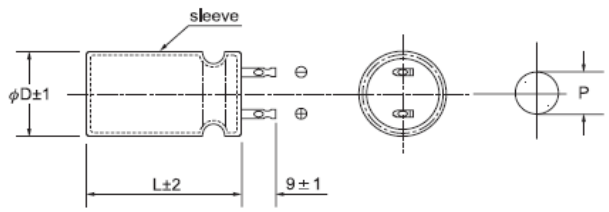


代码：LC

apply to size Φ35~45

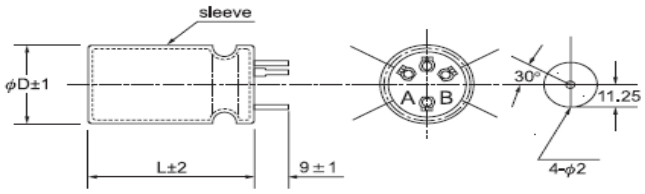

Available Terminals For Screw Type：


Standard product code：A1

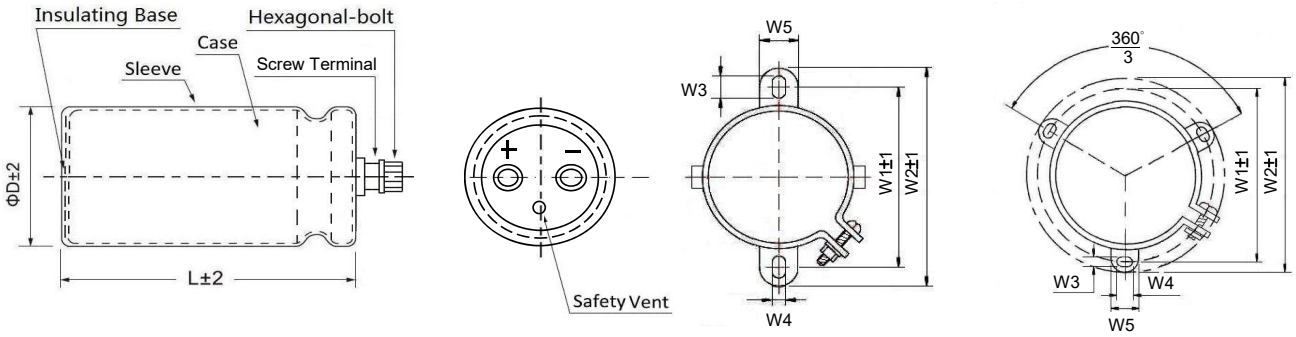

ΦD	W1	W2	W3	W4	W5
35	48.0	58.0	6.0	3.5	10
51	63.5	73.0	5.0	7.0	14
64	76.2	85.1	5.0	7.0	14
77	88.9	98.4	5.0	7.0	14
90	101.6	111.1	5.0	7.0	14

Packaging Specification


1.SMD Packing Specification

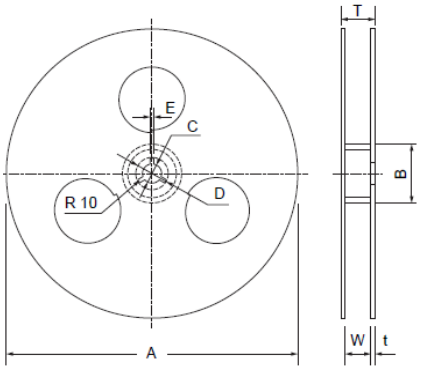

Size Unit：mm

Size	A	B	C	D	E	W	T	t
4Φ ~ 5Φ	380±2	84min	13.0±0.5	42	2.0±0.5	14±1	18±1	2.0
6.3Φ ~ 8× 6.7	380±2	84min	13.0±0.5	42	2.0±0.5	18±1	22±1	2.0
8×10.2 ~ 10Φ	380±2	84min	13.0±0.5	42	2.0±0.5	26±1	30±1	2.0
12.5Φ	380±2	84min	13.0±0.5	42	2.0±0.5	32±1	36±1	2.0
16.0Φ	380±2	84min	13.0±0.5	42	2.0±0.5	44±1	48±1	2.0

① Reel Tape

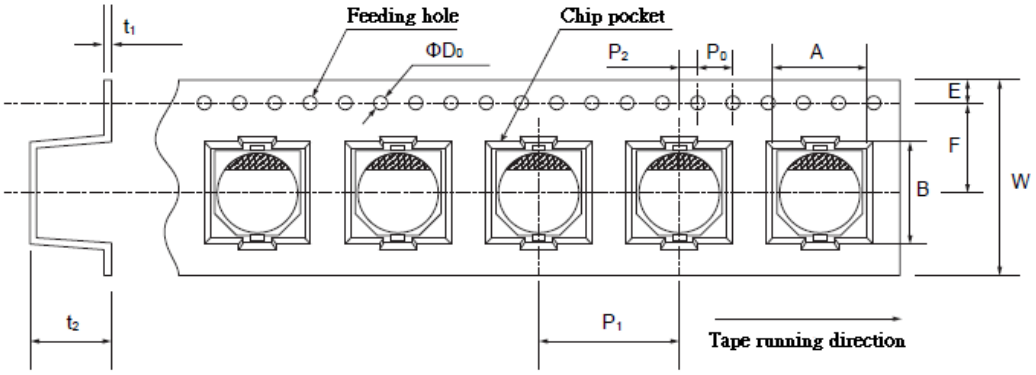

Size Unit：mm

Symbol / SizeDxL	W	A	B	Po±0.1	P1	P2±0.1	F	ΦDo	t1	E	t2
4x5.4	12.0	4.7	4.7	4.0	8.0	2.0	5.5	1.5+0.1-0	0.4	1.75	5.8
5x5.4(5.8*)	12.0	5.7	5.7	4.0	12.0	2.0	5.5	1.5+0.1-0	0.4	1.75	5.8
6.3x5.4(5.8*)	16.0	7.0	7.0	4.0	12.0	2.0	7.5	1.5+0.1-0	0.4	1.75	5.8
6.3x7.7*	16.0	7.0	7.0	4.0	12.0	2.0	7.5	1.5+0.1-0	0.4	1.75	8.3
6.3x9.7*	16.0	7.0	7.0	4.0	12.0	2.0	7.5	1.5+0.1-0	0.4	1.75	11.2
8x6.2	16.0	8.7	8.7	4.0	12.0	2.0	7.5	1.5+0.1-0	0.4	1.75	6.8
8x6.7*	16.0	8.7	8.7	4.0	12.0	2.0	7.5	1.5+0.1-0	0.4	1.75	7.4
8x9.0*	24.0	8.7	8.7	4.0	16.0	2.0	11.5	1.5+0.1-0	0.4	1.75	9.9
8x10.2(10.4*)	24.0	8.7	8.7	4.0	16.0	2.0	11.5	1.5+0.1-0	0.4	1.75	11.0
8x12.2*	24.0	8.7	8.7	4.0	16.0	2.0	11.5	1.5+0.1-0	0.4	1.75	13.0
10x7.7*	24.0	10.7	10.7	4.0	16.0	2.0	11.5	1.5+0.1-0	0.4	1.75	8.7
10x10.2*	24.0	10.7	10.7	4.0	16.0	2.0	11.5	1.5+0.1-0	0.4	1.75	11.0
10x12.2*	24.0	10.7	10.7	4.0	16.0	2.0	11.5	1.5+0.1-0	0.4	1.75	13.2
10x16.5*	24.0	10.7	10.7	4.0	16.0	2.0	11.5	1.5+0.1-0	0.4	1.75	17.5
12.5x13.5	32.0	13.4	13.4	4.0	24.0	2.0	14.2	1.5+0.1-0	0.4	1.75	14.0
12.5x16.0	32.0	13.4	13.4	4.0	24.0	2.0	14.2	1.5+0.1-0	0.4	1.75	16.2
16.0x16.5	44.0	17.5	17.5	4.0	28.0	2.0	20.2	1.5+0.1-0	0.4	1.75	16.7

② **Packaging Specification**

Size	Q'ty per reel	Inner box	Measurement	gross weight	Outer carton	Measurement	gross weight
DxL(mm)	(pcs)	(pcs)	(mm)	(kg)	(pcs)	(mm)	(kg)
4x5.4	2000	20,000	390x195x395	4	40,000	420x410x414	9
5x5.4(5.8*)	1000	10,000	390x195x395	5	20,000	420x410x414	11
6.3x5.4 (5.8*)	1000	10,000	390x235x405	5	20,000	420x410x492	12
6.3x7.7*	1000	10,000	390x235x405	7	20,000	420x410x492	14
6.3x9.7*	700	7,000	390x235x405	7	14,000	420x410x492	14
8x6.2(6.7*)	1000	10,000	390x235x405	7	20,000	420x410x492	15

② Packaging Specification

Size	Q'ty per reel	Inner box	Measurement	gross weight	Outer carton	Measurement	gross weight
DxL(mm)	(pcs)	(pcs)	(mm)	(kg)	(pcs)	(mm)	(kg)
8x10.2(9*~10.4*)	500	4,000	390x255x405	6	8,000	420x410x530	13
8x12.2*	400	3,200	390x255x405	6	6,400	420x410x530	13
10x7.7*	600	4,800	390x255x405	8	9,600	420x410x530	17
10x10.2*	500	4,000	390x255x405	8	8,000	420x410x530	17
10x12.2*	400	3,200	390x255x405	8	6,400	420x410x530	17
10x16.5*	250	2,000	390x255x405	8	4,000	420x410x530	17
12.5x13.5	200	1,200	390x255x405	5	2,400	420x410x530	13
12.5x16.0	150	900	390x255x405	5	1,800	420x410x530	13
16.0x16.5	125	625	390x255x405	5	1,250	420x410x530	13

Note: product size don't marked with "*" mark is an applicable polymer(hybrid) aluminum solid electrolytic capacitor.

More detailed information please contact our company.

Packaging Specification

2.Conductive Polymer(Hybrid) Aluminum Solid Capacitors

① Bulk package：Standard

Classification	Standard			
size ΦDxL(mm)	Vinyl bag Qty (pcs)	Inner box (pcs)	Outer carton (pcs)	gross weight (kg)
5×6,5×7,5×9,6.3×5.4	2,000	16,000	32,000	11
5.5×8~5.5×11	1,000	12,000	24,000	10
6.3×6~6.3×9	1,000	12,000	24,000	14
6.3×10.5~6.3×15	1,000	10,000	20,000	14
6.3×16	1,000	8,000	1,600	14
8×8~8×12	500	7,500	15,000	17
8×15	500	5,000	10,000	17
8×16~8×20	500	4,000	8,000	17
10×10.5~10×12.5	200	4,000	8,000	15
10×13~10×16	200	4,000	8,000	15
10×20	200	3,000	6,000	15


② Bulk package：Cutting & Forming

Classification	Cutting & Forming			
size ΦDxL(mm)	Vinyl bag Qty (pcs)	Inner box (pcs)	Outer carton (pcs)	gross weight (kg)
5×6,5×7,5×9	2,000	2,000	40,000	16
5.5×8~5.5×11	2,000	2,000	40,000	16
6.3×5.4~6.3×9	2,000	2,000	40,000	17
6.3×10.5~6.3×11	1,000	14,000	28,000	17
6.3×13~6.3×15	1,000	10,000	20,000	17
6.3×16	1,000	8,000	16,000	17
8×8~8×12	500	8,000	16,000	18
8×15	500	6,000	12,000	18
8×16~8×20	500	4,000	8,000	18
10×10.5~10×16	200	4,000	8,000	15
10×20	200	3,000	6,000	15

③ Ammo Tape(Fig.1)

Classification	Ammo Tape		
size ΦDxL(mm)	Outer carton (pcs)	Outer carton (pcs)	gross weight (kg)
5φ×6~10L	2,600	13,000	8
5.5φ×7~12L	2,500	12,500	8
6.3φ×5.4~16L	2,000	10,000	8
8φ×8-16L	1,300	6,500	7
8φ×20L	1,300	5,200	7
10φ×10.5~16L	700	3,500	8
10φ×20L	700	2,800	8


Fig.1

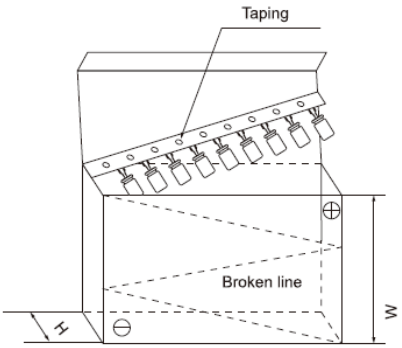

④ Reel Tape(Fig.2)

Classification	Roll Reel braid		
size ΦDxL(mm)	Inner box (pcs)	Outer carton (pcs)	gross weight (kg)
6.3φ	2,000	10,000	6
8φ×5-16L	1,600	8,000	12
10φ×10~17L	1,000	5,000	14

Fig.2

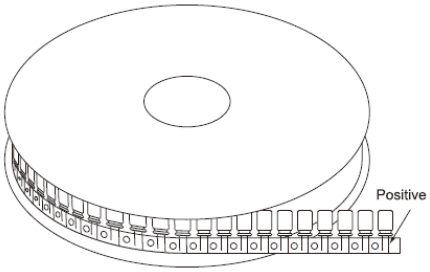

3.Radial Lead Type Aluminum Electrolytic Capacitors

① Bulk package：Standard

Classification	Standard				Classification	Standard			
size DxL(mm)	Vinyl bag Qty (pcs)	Inner box (pcs)	Outer carton (pcs)	gross weight (kg)	size DxL(mm)	Vinyl bag Qty (pcs)	Inner box (pcs)	Outer carton (pcs)	gross weight (kg)
4×5	2,000	24,000	48,000	13	10×14~10×15	200	3,600	7,200	15
4×7	2,000	20,000	40,000	12	10×16~10×18	200	3,600	7,200	15
5×5	2,000	20,000	40,000	11	10×20~10×21	200	3,000	6,000	16
5×7	2,000	16,000	32,000	14	10×22~10×25	200	2,400	4,800	16
5×9~5×11	1,000	12,000	24,000	11	10×26	200	2,400	4,800	17
5×15	1,000	10,000	20,000	13	10×27~10×35	200	1,800	3,600	16
6.3×5	2,000	16,000	32,000	13	12.5×13~12.5×16	100	2,400	4,800	15
6.3×7	2,000	12,000	24,000	11	12.5×20~12.5×22	100	1,800	3,600	15
6.3×9~6.3×14	1,000	10,000	20,000	14	12.5×23~12.5×26	100	1,200	2,400	13
6.3×15~6.3×17	1,000	10,000	20,000	14	12.5×30	100	1,200	2,400	15
8×5~8×7	500	10,000	20,000	14	13×13~13×16	100	2,400	4,800	15
8×9~8×12	500	7,500	15,000	16	13×18~13×21	100	1,800	3,600	16
8×14~8×15	500	5,000	10,000	13	13×24~13×26	100	1,200	2,400	12
8×16	500	5,000	10,000	14	13×30	100	1,200	2,400	13
8×20~8×25	200	4,000	8,000	14	13×35~13×36	100	1,000	2,000	14

② Bulk package：Cutting & Forming

Classification	Cutting & Forming				Classification	Cutting & Forming			
size ΦDxL(mm)	Vinyl bag Qty (pcs)	Inner box (pcs)	Outer carton (pcs)	gross weight (kg)	size ΦDxL(mm)	Vinyl bag Qty (pcs)	Inner box (pcs)	Outer carton (pcs)	gross weight (kg)
10×9~10×13	200	4,000	8,000	14	13×38~13×40	100	800	1,600	13
4×5	2,000	40,000	80,000	13	6.3×7	2,000	20,000	40,000	18
4×7	2,000	32,000	64,000	15	6.3×9~6.3×14	1,000	14,000	28,000	19
5×5	2,000	32,000	64,000	14	6.3×15~6.3×17	1,000	10,000	20,000	15
5×7	2,000	32,000	64,000	17	8×5~8×7	500	8,000	16,000	12
5×9~5×11	1,000	20,000	40,000	17	8×9~8×12	500	8,000	16,000	15
5×15	1,000	14,000	28,000	14	8×14~8×15	500	6,000	12,000	15
6.3×5	2,000	20,000	40,000	17	8×16	200	4,000	8,000	11
8×20~8×25	200	4,000	8,000	13	12.5×23~12.5×26	200	1,200	2,400	12
10×9~10×13	200	4,000	8,000	13	12.5×30	100	1,000	2,000	11
10×14~10×15	200	4,000	8,000	15	13×13~13×16	200	1,600	3,200	11
10×16~10×18	200	3,200	6,400	14	13×18~13×21	200	1,200	2,400	11
10×20~10×21	200	2,800	5,600	13	13×24~13×26	200	1,200	2,400	11
10×22~10×25	200	2,400	4,800	15	13×30	100	1,000	2,000	13
10×26	200	1,600	3,200	13	13×35~13×36	100	600	1,200	9
10×27~10×35	200	1,600	3,200	14	13×38~13×40	100	600	1,200	12
12.5×13~12.5×16	200	1,600	3,200	11	16×15~16×20	200	1,000	2,000	14
12.5×20~12.5×22	200	1,200	2,400	10	18×15~18×20	200	1,000	2,000	17

③ For lattice bar type packing of standard& Cutting & Forming （Fig.3)

size	Standard			size	Cutting & Forming		
size ΦDxL(mm)	Inner box (pcs)	Outer carton (pcs)	gross weight (kg)	size ΦDxL(mm)	Inner box (pcs)	Outer carton (pcs)	gross weight (kg)
8φ×50~60L	1000	2000	10	8φ×30~45L	1000	4000	13
10φ×30~45L	700	2100	16	8φ×46~50L	1000	3000	14
10φ×46~60L	700	1400	13	10φ×30~45L	700	2800	15
12.5φ×35~45L	460	1380	12	10φ×46~60L	700	2100	16
12.5φ×50~60L	460	920	13	12.5φ×40~45L	460	1840	13
16φ×15~20L	300	1200	9	12.5φ×46~55L	460	1380	12
16φ×21~26L	300	900	8	16φ×21~30L	300	1200	13
16φ×27~32L	300	900	9	16φ×31~45L	300	1200	16
16φ×33~40L	300	900	14	18φ×21~30L	250	1000	13
16φ×45L	300	600	12	18φ×31~45L	250	1000	19
18φ×15~20L	250	1000	9	18φ×50L	250	750	16
18φ×21~45L	250	750	14	22φ×25~30L	160	640	11
18φ×50L	250	500	11	22φ×31~45L	160	640	16
22φ×25~45L	160	480	13	22φ×50L	160	480	13
22φ×50L	160	320	11				

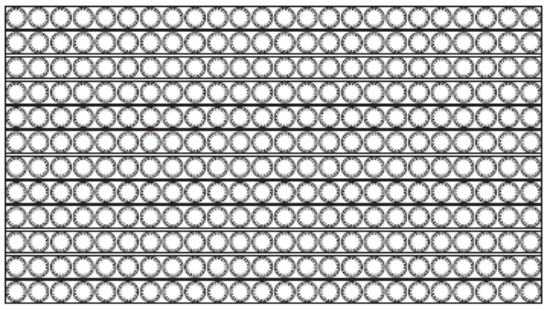


Fig.3

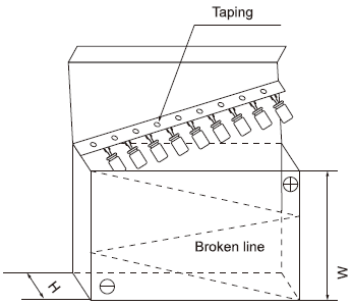


Fig.4

④ For Taping Ammo & Reel(Fig.4)

Classification	Ammo Tape						
size ΦDxL(mm)	Inner box (pcs)	Outer carton (pcs)	gross weight (kg)	size ΦDxL(mm)	Inner box (pcs)	Outer carton (pcs)	gross weight (kg)
4φ×5~7L	3000	15000	5	12.5φ×12.5~31L	500	2000	14
5φ×5~15L	2600	13000	8	13φ×13~31L	500	2000	14
6.3φ×5~17	2000	10000	8	12.5φ×35~41L	500	1500	12
8φ×5~17L	1200	6000	10	13φ×35~41L	500	1500	12
8φ×18~30L	1200	4800	13	16φ×15~32L	300	1200	14
10φ×9~17L	800	4000	10	16φ×35~40L	300	900	13
10φ×18~32L	800	3200	11	18φ×16~32L	250	1000	16
10φ×35L	800	2400	14	18φ×35~35.5L	250	750	14

⑤ Roll Reel braid(Fig.5)

Classification	Ammo Tape		
size ΦDxL(mm)	quantity (pcs/box)	quantity (pcs/box)	gross weight (kg/box)
4x5~7L	3,000	15,000	6
5x5~11L	2,400	12,000	8
6.3x5~11L	2,000	10,000	9
8×5-16L	1,600	8,000	12
8×20L	1,000	5,000	12
10×10~16L	1,200	6,000	13
10×17~20L	1,000	5,000	12

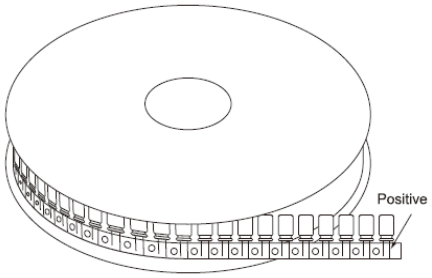


Fig.5

4. SNAP-IN Type Aluminum Electrolytic Capacitors(Fig.6)

size	weighe	inner box	outer carton
ΦDxL(mm)	(g/pcs)	(pcs)	(pcs)
22×25 ~ 30	20 ~ 25	100	800
22×35 ~ 50	25 ~ 30	100	600
25×25 ~ 30	25 ~ 30	100	800
25×35 ~ 50	30 ~ 35	100	600
25×55~ 70	38.5~62	100	400
30×20 ~ 30	30 ~ 35	50	400
30×35 ~ 50	35 ~ 40	50	300
30 x 55~70	45~50	50	200
35×25 ~ 30	40 ~ 45	40	320
35×35 ~ 55	45 ~ 50	40	240
35×56 ~ 70	55~70	40	160
40×56~ 70	90~155	40	160
40×71~ 90	120~175	40	160
45×56~ 70	100~175	24	96
45×71~ 90	120~220	24	96
45×91~ 105	180~280	24	48

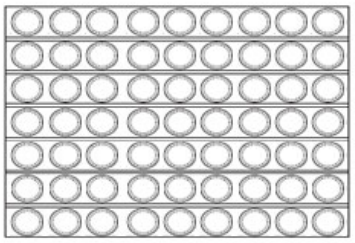


Fig.6

5. SCREW Type Aluminum Electrolytic Capacitors(Fig.7)

size	outer carton
ΦDxL(mm)	(pcs)
35×50~100	42
51×70~115	40
64×96~115	15
77×100~236	15
90*105~236	12

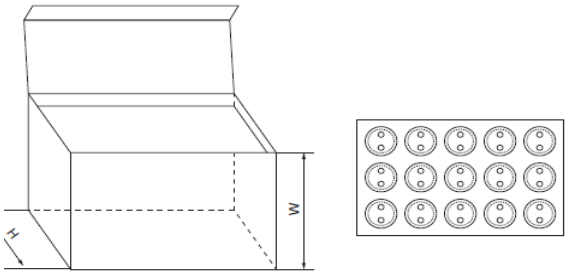


Fig.7

Ⅰ. Lifetime Estimation

Conductive polymer(hybrid) aluminum solid capacitors (hereinafter referred to as PC-CON)are finite life electronic components like aluminum electrolytic capacitors. The lifetime is affected by ambient temperature, humidity, ripple current and surge voltage.

The lifetime of aluminum electrolytic capacitors is affected mainly by the loss of electrolyte as the result of the liquid electrolyte evaporating through the rubber seal materials, resulting in capacitance drop and tanδ rise.On the other hand, the lifetime of conductive polymer(hybrid) aluminum solid capacitors is affected mainly by oxidation degradation of the conductive polymer caused by osmose of oxygen or the thermal degradation of the conductive polymer by ambient temperature or self-heating, resulting in ESR rise and tanδ rise.The infiltration rate of the oxygen is depend on the temperature as the liquid electrolyte evaporation and the relationship follows the Arrhenius's Law, too. Similarly, thermal degradation of the conductive polymer by self-heating follows the Arrhenius's Law, too.

1.1 Conductive Polymer Solid aluminum Capacitors Lifetime Estimation

Subject series：FR/FH/FG/FF/FS/FL/FT/FP/FJ/VB/VP/VS/VQ/VH

Equation (1) can be used for estimating the lifetime of the conductive polymer aluminum solid capacitors based on the ambient temperature and the rise of internal temperature due to ripple current.

$L_X=L_0X10^{(T0-TX)/20}$----------(1)

Lx：Estimation of actual lifetime (hour)

Lo：Specified lifetime with the rated voltage at the upper limit of the category temperature (hour)

To：Maximum category temperature (℃)

Tx：Actual ambient temperature of the capacitor (℃)

Longer lifetime is expected by lowering the ripple current and the ambient temperature.

The (ripple) life expectancy at a lower temperature than the specified maximum temperature may be estimated by the above equation,but this expectancy formula does not apply for ambient below +40℃.

1.2 Conductive Polymer(Hybrid) aluminum Solid Capacitors Lifetime Estimation

Subject series：FB/FC/VD/VA/YA/YD/YS/YX/YB/YE/YK/YH

Equation (2) can be used for estimating the lifetime of the conductive polymer(hybrid) aluminum solid capacitors based on the ambient temperature and the rise of internal temperature due to ripple current.

$L_X=L_0X2^{(T0-TX)/10}$----------(2)

Lx：Estimation of actual lifetime (hour)

Lo：Specified lifetime with the rated voltage at the upper limit of the category temperature (hour)

To：Maximum category temperature (℃)

Tx：Actual ambient temperature of the capacitor (℃)

Longer lifetime is expected by lowering the ripple current and the ambient temperature.

The (ripple) life expectancy at a lower temperature than the specified maximum temperature may be estimated by the above equation,but this expectancy formula does not apply for ambient below +40℃.

2. Rated Ripple Current Frequency Multipliers

Self-heat rise is generated by the ripple current even though the conductive polymer(hybrid) aluminum solid capacitors have low ESR compared to liquid based electrolyte aluminum electrolytic capacitor.Longer lifetime is expected by lowering the ripple current and the ambient temperature. Table 1 shows Frequency Multipliers of Rated ripple current.

Frequency Multipliers

Frequency [Hz]	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
SMD type	0.05	0.3	0.7	1
Radial lead type	0.05	0.3	0.7	1
Hybrid type	0.1	0.3	0.6	1

Conductive polymer(hybrid) aluminum solid capacitors have super low ESR characteristic in high-frequency range. On the whole, ESR in low-frequency range relatively rises. Therefore, they can use only l ripple current in low-frequency range.
Please ensure that excessive ripple current is not applied to the capacitors in all frequency range.

3. Restriction of Calculated Lifetime

(1)The result calculated by the estimated lifetime formula, it is not guaranteed lifetime.

(2)When designer calculate the lifetime of apparatus, please include an ample margin in consideration to the estimated lifetime of a capacitor.

(3)The estimated life is limited to 15 years, if it exceeds 15 years,take 15 years as standard.

(4) If 15 years or more may be required as an expected lifetime, please consult us.

Ⅱ. About Failure and Shelf-Life

Failure rate(failure rate level) subject to 0.5 %/1000 h of JIS C 5003（ Credibility level 60 %）

The main failure mode of polymer(hybrid) solid aluminum electrolytic capacitor of is shown below.

1. Random Failure

The main cause of failure mold is short circuit due to heat stress, electrical stressing and mechanical stress in using environment or welding.

(1) applied voltage more than rated voltage

(2) applied reverse voltage

(3) Excessive mechanical stress

(4) Applying fast charging and discharging that more than specifications and cause surge current

a.If the short circuit current flows through the solid(hybrid) capacitor will cause the following phenomenon.

(1) When the electric current is less after short circuit（φ10 : about below1 A，φ8 : about below 0.5 A，φ6.3 : about below 0.2 A）PC-CON body will have little heat but appearance is normal even continuous electricity.

(2) When the short circuit current value exceeds the above numerical, internal temperature will increased, encapsulation adhesive pad summoned and the odorous gases to overflow.

b. In order to ensure the safety in case of occurs short circuit, please take the following countermeasures

(1) Cut off the main power supply and stop using immediately if overflow the odorous gases.

(2) Due to the different conditions , the odorous gases occurrence generally takes a few seconds to several minutes, When using protection circuits we recommend to start protect function in this period.

(3) Cleaned immediately if the gas enters into eye ，gargle immediately if inhalation into mouth.

(4) Don't lick the electrolyte if electrolyte contact with the skin please washing with soap immediately.

(5) PC-CON including combustible material, current value greatly after the short circuit and short circuit parts will have a possibility of spark. In order to protect safety, please pay attention to the design structure and use protection circuit.

2. The Wear Failure (Shelf Life)

Electrical characteristics can make a big change when more than the guarantee time of durability and high temperature and high humidity test, electrolyte will insulation (degradation) formation of open mode eventually.

Even used within the prescribed scope of electrical and mechanical properties, it may also reducing capacitance and increase ESR, so please take care when design.


Ⅲ.Leak Current

The leak current of conductive polymer(hybrid) solid aluminum electrolytic capacitor will increase due to the mechanical stress .


In this case, if the solid capacitor apply voltage below the high using temperature, the repairing effect of leak current will reducing gradually.

If the solid(hybrid) capacitor applies rated voltage within the high using temperature, the repairing speed of leak current will faster.


Conductive polymer solid aluminum electrolytic capacitor
Repiring character of leak current
10μF/16 V.DC（apply 16 V.DC）

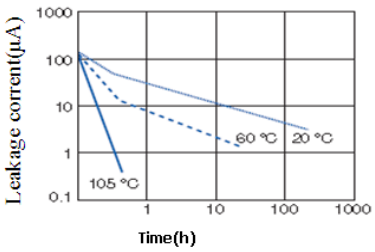

Conductive polymer solid aluminum electrolytic capacitor
Repiring character of leak current
33μF/10 V.DC（ambient temperature65℃）
（Test voltage10V.DC）

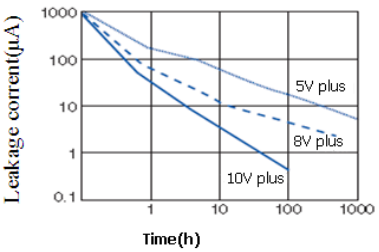

Conductive polymer hybrid capacitor
Repiring character of leak current
100μF/25 V.DC（apply 25 V.DC）



※In order to show more clearly said repair of leakage current，we use the sample of apply stress to PC-CON that increased leak current on purpose.

Ⅳ.The Limited of Faster Charging and Discharging

Faster charging and discharging will lead to large surge current and then result in short circuit or increase leak current.

When the surge current value as below, we recommend to use protection circuit in order to maintain high reliability.

(1) more than 10 A

(2) exceed rated ripple current 10times

Ⅴ.Correct Mounting

1. About The Soldering Iron Soldering

(a)Avoiding applying stress on PC-CON body when it need to process lead due to unconformity between lead gap and circuit board gap of plugin mounting.

(b)Avoiding applying excessive stress on PC-CON body when soldering.

(c) When need to take out PC-CON after soldering, please melt molten solder sufficient, implement under the condition of not put stress on the PC-CON body.

(d) Don't let the tip of the soldering iron to touch the PC-CON body.

2. Wave-Soldering

(a) Do not have wave soldering to SMD product.

(b) Do not dip the PC-CON body into dissolved soldering flux.

(c) Welding parts only limited between the circuit board and the opposite side of the PC-CON.

(d) Don't splash other place expectation rosin.

(e)Avoiding other parts lie down and touching PC-CON when soldering.

3. Reflow Soldering

(a) Do not have reflow soldeering to plugin mounting product .

(b) Please consult us when use VPS for solderinig.

4. Precaution After Soldering

Take care for not to apply the following excessive stress for polymer(hybrid) solid aluminum electrolytic capacitor.

(a) Do not tilt down or distorted capacitor.


(b)Mobile circuit board can not handle PC-CON.

(c) Do not crash PC-CON.

(d)Do not make the PC-CON touch PCB circuit boards and other components when stacked.


5. Recommended Conditions for Solder

< peak temperature 250 ℃ lead-free reflow soldering >

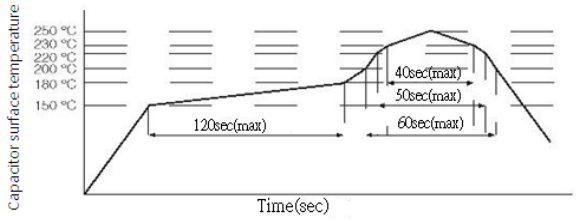

Reflow soldering under the condition of the following reflow soldering up to 2 times

< peak temperature 260 ℃ lead-free reflow soldering >

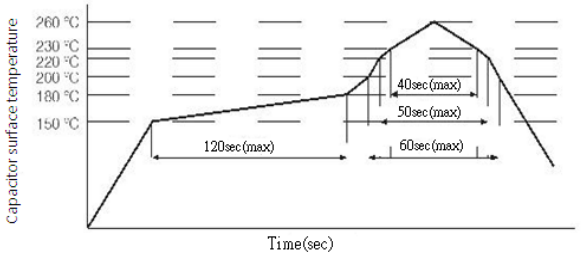

Reflow soldering under the condition of the following reflow soldering up to 1 times


6. Solder Iron Temperature：At 320 ℃~400 ℃ ± 10 ℃ ；working hours：whithin 10s

Wave-soldering

	Temperature	Time	Number of Time
Preheat	120℃below（ambient temperature）	less than300s	once
Welding Condition	280℃±10℃below	less than10±1s	less than twice*1

*1 ：For 2 times, solder dipping time total of 10 + 1 seconds.

7.Recommend the Bonding Pad Size



Unit：mm

Size Code	a	b	c
φ5.0	1.4	7.4	1.6
φ6.3	2.1	9.1	1.6
φ8.0	2.8	11.1	1.9
φ10.0	4.3	13.1	1.9

Ⅰ.Device Circuits Design Considerations

1.Prohibited to Use Circuit

Conductive polymer(hybrid) solid aluminum electrolytic capacitor（The following is called capacitor） may cause the leak current occur changing due to the heat stress in welding. Please avoid to use in the below circuit.

① High resistance voltage holding circuit.

② Coupled circuits.

③ The other circuits that affected leakage current larger

2.Circuit Design

Please design circuit on the basis of confirming the following content.

① As the change of temperature and frequency, electric property of capacitor will changes.Please design circuit after confirming those changes.

② When more than 2 capacitors in parallel，please consider the balance of current when design circuit.

③ When more than 2 capacitors in series，as the difference of load voltage，it may load overvoltage, so please consulting us when using.

④ Please don't install heating components around the capacitor and the back of the printed wiring board.

3.Using Capacitors for Significantly Safety-Oriented Applications

Consult us about capacitors for a device application affecting human safety (①Aviation and aerospace ②Nuclear ③Medical) or for any device whose failure will make an impact on society.

4.Polarity

The conductive polymer(hybrid) capacitor of our company is a capacitor with polarity. Never apply a reverse voltage or AC voltage. Connecting with wrong polarity will short circuit in initial State. About polarity, please confirm product catalogue or the diagram in the product specifications.

5.Operating Voltage

Do not apply an overvoltage that exceeds rated voltage, Because even if to load the voltage that more than the rated voltage only for an instant，it can also lead to increased leakage current and short circuit. The total peak value of the ripple voltage plus the DC voltage must not exceed the rated voltage of the capacitors. In the work, it doesn’t need to reduce the voltage. Although capacitors specify a surge voltage, in the temperature range, if under the rated voltage, whatever is the environment temperature; it also has limited and does not assure long-term use.

6.Ripple Current

Do not apply an overcurrent that exceeds the rated ripple current specified for the capacitors.Excessive ripple current will increase heat production within the capacitors, shortening the life and short circuit.

7.Operating Temperature

If use beyond working temperature range of environment, can lead to aging and failure performance, please use in working temperature range.

8.Charging and Discharging

Don not use capacitor in the circuit of rapid charge and discharge repeatedly. If capacitors are used in the circuits that repeat a charge and discharge, capacitance will decrease and/or the capacitors will be damaged by internal heat generation. When the peak of current value more that 20A, we recommend to use protect circuit in order to keep the reliability.

9.Leakage Current

Sometime the leakage current will increase，but if load voltage in working temperature, it will decrease gradually though self-healing effect. In addition, the more closely to the limit temperature, the faster of the reduce speed of leakage current. The reasons for leakage current increase as below：

① Weldding

② High temperature without load, high temperature and high humidity, rapid temperature change test and so on.

10.Failure Mode

① Reduce the failure rate by reducing the surrounding temperature, ripple current and load voltage.

② Electrostatic capacity decreases caused by product temperature rise and opening mode wear caused by ESR rise, which are the main failure mode. Sometimes it will occur short circuit mode due to the overvoltage and large current.

③ Lead to short circuit due to load the voltage that more than rated voltage, when the current is larger, the shell will expansion or peeling off, give out bad smell due to the internal pressure rising.

④ The constitute material of products containing flammable materials，the short circuit parts will fire may due to the spark. The install ways 、location、graphic design of the product, please consider the following importance points of design to ensure the absolute safety.

＊Setting up protection circuit and protection devices to ensure that equipment safety.

＊Setting up long circuit etc. , so that the devices will stabilization even of a single fault.

11.The Insulation of The Capacitor

The outer sleeve of a capacitor does not assure electrical insulation Please have electrical insulation between the capacitor sleeve and cathode terminal and anode terminal and circuit board.

12.Operating Conditions

Do not use/expose capacitors to the following conditions:

① Direct contact with water, salt water or oil, or high condensation environment.

② Direct sunlight.

③ Toxic gases such as hydrogen sulfide, sulfurous acid, nitrousacid, chlorine and its compounds, bromine and its compounds and ammonium.

④ Ozone, ultraviolet rays or radiation.

⑤ Extreme vibration or mechanical shock that exceeds limits in the catalogs or product specifications.

13. Capacitor Mounting

① SMD product（mould SMD、SMD）solder graphics of the Capacitor printed wiring board, Please refer to the provisions of the catalogue or specifications for graphic design.

② For radial lead type capacitors, please make sure the terminal spacing of a capacitor equals the holes spacing on the PC board.

③ Do not print any copper trace under the seal (terminal) side of a capacitor. Copper traces should be 1 mm (preferably 2mm or more) spaced apart from the side of the capacitor body.

④ In designing a double-sided PC board, do not locate any through-hole via or unnecessary hole underneath a capacitor.

⑤ In designing a double-sided PC board, do not print any circuit pattern underneath a capacitor.

Ⅱ. Installation

1.Assembling

① Do not try to reuse the capacitors once assembled and electrified.

②Capacitors may have been spontaneously recharged with time by a recovery voltage phenomenon. In this case, discharge the capacitors through a resistor of approximately 1kΩ before use.

③ If have been stored at any conditions more than 35℃ and 75%RH for long storage periods of time more than the limits specified in the catalogs or product specifications, they may have high leakage current. In this case, discharge by applying the rated voltage through a resistor of approximately 1kΩ.

④ Confirm the rated capacitance and voltage of capacitorsbefore installation.
⑤ Confirm the polarity of capacitors before installation.
⑥ Do not try to use the capacitors that were dropped to the floorand so forth.
⑦ Do not deform the can case of a capacitor.
⑧ Make sure that the terminal spacing of a capacitor equals theholes spacing on the PC board before installing the capacitor.
⑨Do not apply excessive mechanical force to capacitors more than the limits prescribed in the catalogs or product specifications. If apply excessive force, the terminal will break off or deformaiton and affect install, even cause short circuit,break line, increase LC and demage package.Avoid excessive mechanical force while the capacitors are in the process of vacuum-picking, placing and positioning by automatic mounting machines or cutting the lead wires by automatic insertion machines.

2.Soldering and Heat Resistance

Ensure that the soldering conditions meet the specifications recommended of our company. Note that the leakage current may increase or capacitance may decrease due to thermal stresses that occur during soldering, etc. Furthermore, theleakage current which rose gradually decreases, when voltageis applied at below the category upper limit temperature.Additionally the self repairing action is faster when voltage near the rated voltage rather than at a higher voltage is applied at below the category's upper temperature limit.

(1)Verify the following before using a soldering iron:
①That the soldering conditions (temperature and time) are within the ranges specified in the catalog or product specifications.
② That the tip of the soldering iron does not come into contact with the capacitor itself.
(2)Verify the following when flow soldering:
① Do not dip the body of a capacitor into the solder bath only dip the terminals in. The soldering must be done on the reverse side of PC board.
② Soldering conditions should be within the limits prescribed in the catalog or the product specifications.
③ Do not apply flux to any part of capacitors other than their terminals.
④ Make sure the capacitors do not come into contact with any other components while soldering.
Please note the SMD product (SMD type) non-corresponding wave-soldering.
(3)Verify the following when reflow soldering:

① Soldering conditions (preheat, solder temperature and soldering time) should be within the limits prescribed in the catalogs or the product specification.

② The heat level should be appropriate. (Note that the thermal stress on the capacitor varies depending on the type and position of the heater in the reflow oven, and the color and material of the capacitor.)

Except for the surface mount type, reflow soldering must not be used for the other capacitors.
(4)Do not reuse a capacitor that has already been soldered to PC board and then removed. When using a new capacitor in the same location, remove the flux, etc. first, and then use a soldering iron to solder on the new capacitor in accordance with the specifications.

3.Handling After Soldering

① Do not lean or twist the body of the capacitor after solderingthe capacitors onto the PC board.
② Do not use the capacitors for lifting or carrying the assemblyboard.
③ Do not hit or poke the capacitor after soldering to PC board. When stacking the assembly board, be careful that other components do not touch the aluminum electrolytic capacitors.
④ Do not drop the assembled board.

4.Cleaning PC Boards

(1)Do not wash capacitors by using the following cleaning agents. Solvent resistant capacitors are only suitable for washing using the cleaning conditions prescribed in the catalog or the product specification. In particular, ultrasonic cleaning will accelerate damage to capacitors.
＊Halogenated solvents →cause capacitors to fail due to corrosion.
＊Alkali system solvents →corrode (dissolve) an aluminum case.
＊Petroleum system solvents →ause the rubber seal material to deteriorate.
＊Xylene →causes the rubber seal material to deteriorate
＊Acetone → erases the markings
CFC alternatives or the other cleaners above; please consult with us.
(2)Verify the following points when washing capacitors.
① Monitor conductivity, pH, specific gravity and the water content of cleaning agents. Contamination adversely affects these characteristics.
② Be sure not to expose the capacitors under solvent rich conditions or keep capacitors inside a closed container.
In addition, please dry the solvent sufficiently on the PC board and the capacitor with an air knife (temperature should be less than the maximum rated category temperature of the capacitor) for 10 minutes. Aluminum electrolytic capacitors can be characteristically and catastrophically damaged by halogen ions, particularly by chlorine ions, though the degree of the damage mainly depends upon the characteristics of the electrolyte and rubber seal material. When halogen ions come into contact with the capacitors, the foil corrodes when a voltage is applied. This corrosion causes an extremely high leakage current which results venting and an open circuit.
(3)Verify the following when reflow soldering:
① Higher alcohol cleaning agents.
Using these cleaning agents, capacitors are capable of withstanding immersion or ultrasonic cleaning for 10 minutes at a maximum liquid temperature of 60℃. Find optimum condition for washing, rinsing, and drying. Be sure not to rub the marking off the capacitor which can be caused by contact with other components or the PC board. Note that shower cleaning adversely affects the markings on the sleeve.
② Non-Halogenated Solvent Cleaning.
Immersion, ultrasonic or vapor cleaning for 5 minutes. However, from an environmental point of view, these types of solvent will be banned in near future. We would recommend not using them if at all possible.
③ Isopropyl Alcohol (IPA).
IPA (Isopropyl Alcohol) is one of the most acceptable cleaning agents; it is necessary to maintain a flux content in the cleaning liquid at a maximum limit of 2 Wt.%.）

5.Precautions for Using Adhesives and Coating Materials

(1)Do not use any adhesive and coating materials containing.

(2) Verify the following before using adhesive and coating material.

① Remove flux and dust left over between the rubber seal and the PC board before applying adhesive or coating materials to the capacitor.

② Dry and remove any residual cleaning agents before applying adhesive and coating materials to the capacitors. Do not cover over the whole surface of the rubber seal with the adhesive or coating materials.

③ For permissible heat conditions for curing adhesives or coating materials, please consult with us.

④ Covering over the whole surface of the capacitor rubber seal with resin may result in a hazardous condition because the inside pressure cannot be completely released. Also, a large amount of halogen ions in resins will cause the capacitors to fail because the halogen ions penetrate into the rubber seal and the inside of the capacitor.

⑤ Some coating materials, it cannot be implemented to the capacitor.

6. Fumigation

In many cases when exporting or importing electronic devices, such as capacitors, wooden packaging is used. In order to control insects it may become necessary to fumigate the shipment.Precautions during “Fumigation” using halogenated chemical such as Methyl Bromide must be taken. Halogen gas can penetrate packaging materials such as cardboard boxes and vinyl bags. Penetration of the halogenated gas can cause corrosion of Electrolytic capacitors. Our company uses packaging methods that do not require fumigation treatment when importing and exporting.Verify whether the assembled PC board, products and capacitors themselves are subjected to Fumigation during their transportation or not.

Ⅲ.The Operation of Devices

1.Do not touch the capacitor terminals directly.

2.Do not short circuit the terminal of a capacitor by letting it come into contact with any conductive object.

Also, do not spill electric-conductive liquid such as acid or alkaline solution over the capacitor.

3.Please make sure the assembly of the complete circuit of capacitor installation environment.

Do not use capacitors in circumstances where they would be subject to exposure to the following materials

① Oil, water, salty water or damp location.

② Direct sunlight.

③ Ozone, ultraviolet rays or radiation.

④ Toxic gases such as hydrogen sulfide, sulfurous acid, nitrous acid, chlorine or its compounds, and ammonium.

⑤ Severe vibration or mechanical shock conditions beyond the limits prescribed in the catalog or product specification.

Ⅳ.Maintenance Inspection

1.Make periodic inspections of capacitors that have been used in industrial applications.

Before inspection, turn off the power supply and carefully discharge the electricity in the capacitors. Verify the polarity when measuring the capacitors with a voltohm meter. Do not apply any mechanical stress to the terminals of the capacitors.

2.The following items should be checked during the periodic inspections.

①Significant damage in appearance.

②Electrical characteristics: leakage current, capacitance,tanδ and other characteristics prescribed in the catalog or product specification.

We recommend replacing the capacitors if the parts are out of specification.

Ⅴ.Contingencies

1) If gas has vented from the capacitor during use, there is a short circuit and burning, or the capacitor discharges an odor or smoke, turn off the main power supply to the equipment or unplug the power cord.

2) If there is a problem with the capacitor or a fire breaks out, the capacitor may produce a burning gas or reactive gas from the outer resin, etc. If this happens, keep your hands and face away from the gas. If vented gas is inhaled or comes into contact with your eyes, flush your eyes immediately with water and/or gargle. If vented gas comes into contact with the skin, wash the affected area thoroughly with soap and water.

Ⅵ.Storage

We recommend the following conditions for storage.

(1) Store capacitors in a cool, dry place. Store at a temperature between 5 and 35℃, with a humidity of 75% or less.(table-1 Maximum storage term)
The duration, please refer to the table below.

	Before the bag is opened	After the bag is opened
SMD(Resin-Molded chip type)	within one year after delivery	Within 30 days after the bag is opened
DIP(Radial lead type)	within one year after delivery	Within 7 days after the bag is opened

①SMD products are sealed in a PE plastic bag. Use all capacitors in desposit period once the bag is opened.

②If the bag have open and need to storage, please return unused capacitors to the bag, and seal it with a zipper.

③Be sure to follow our recommendations for reflow soldering.

(2) Store the capacitors in a location free from direct contact with water, salt water, and oil.

(3) Store in a location where the capacitor is not exposed to toxic gas, such as hydrogen sulfide, sulfurous acid, nitrous acid, chlorine or chlorine compounds, bromine or other halogen gases, methyl bromide or other halogen compounds, ammonia, or similar.

(4) Store in a location where the capacitor is not exposed to ozone, ultraviolet radiation, or other radiation.

(5) It is recommended to store capacitors in their original packaging wherever possible.

Ⅶ.Disposal

Please consult with a local industrial waste disposal specialist when disposing of aluminum electrolytic capacitors.

Ⅷ.About AEC-Q200

AEC is the abbreviation of the Automotive Electronics Council, which establishes the certification and reliability standards for various electronic components, and also specifies the reliability test standards for our main products. The product design and services provided by our company can meet the relevant needs of customers. If you need to meet the requirements of AEC-Q200 products, please contact us directly for details.

Ⅸ.Catalogs

Specifications in the catalogs are subject to change without notice. Test data shown in the catalogs are not assured as the whole performance values, but typical values.

1．Overview of Aluminum Electrolytic Capacitors

1-1 Basic Model of Aluminum Electrolytic Capacitors

1) Capacitors are passive components. Among the various kinds of capacitors, aluminum electrolytic capacitors offer larger CV product per case size and lower cost than the others.In principles of capacitor, its fundamental model is shown in Fig.1 and its capacitance © is expressed by Equation (1) below:

$$C = 8.854 \times 10^{-12} \times \frac{\varepsilon S}{d} (F) \cdots\cdots (1)$$

ε：Dielectric constant
S ：Surface area of dielectric (m^2)
d ：Thickness of dielectric (m)




Fig-1 Basic model of capacitor

2) Equation (1) shows that the capacitance (C) increases as the dielectric constant (ε) and/or its surface area (S) increases and/or the dielectric thickness (d) decreases.
An aluminum electrolytic capacitor comprises a dielectric layer of aluminum oxide (Al_2O_3), the dielectric constant (ε) of which is 8 to 10. This value is not significantly larger than those of other types of capacitors

However, by extending the surface area (S) of the aluminum foil electrode by means of etching, and by electrochemically forming a thinner but highly voltage-withstandable layer of oxide layer dielec-tric, the aluminum electrolytic capacitor can offer a larger CV prod-uct per case than other types of capacitors.

3) A basic model of aluminum electrolytic capacitor is shown in Fig. 2.
An aluminum electrolytic capacitor comprises
Anode …Aluminum foil
Dielectric…Electrochemically formed oxide layer (Al_2O_3) on the anode
Cathode …A true cathode is electrolytic solution (electrolyte).
Other component materials include a paper separator that holds electrolyte in place and another aluminum foil that func-tions as a draw-out electrode coming into contact with the true cathode (electrolyte).In general, an aluminum electrolytic capacitor is asymmetrical in structure and polarized. The other capacitor type known as a bi-polar (non-polar) comprises the anodic aluminum foils for both electrodes.

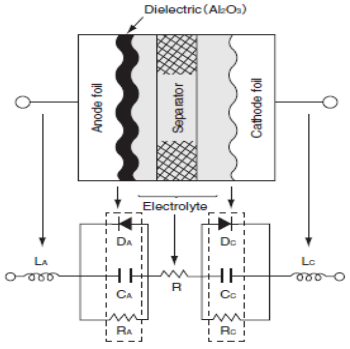


Fig-2Basic model and equivalent circuit aluminum electrolytic capacit

CA、CC：Capacitance due to anode and cathodes foils DA、
DC：Diode effects due to oxide layer on anode and cathode foils L
L ：Inductance due to anode and cathode terminals
R ：Resistance of electrolyte and separator
RA、RC：Internal resistance of oxide layer on anode and cathode foils.

1-2 Structure of Aluminum Electrolytic Capacitor

1) The aluminum electrolytic capacitor has, as shown in Fig. 3, a roll of anode foil, paper separator, cathode foil and electrode terminals (internal and external terminals) with the electrolyte impregnated, which is sealed in an aluminum can case with a sealing material. The terminal draw-out structure, sealing material and structure




Fig-3 Basic model of element

2) The terminal draw-out structure, sealing material and structure differ depending on the type of the capacitor.Figure 4 shows typical examples.

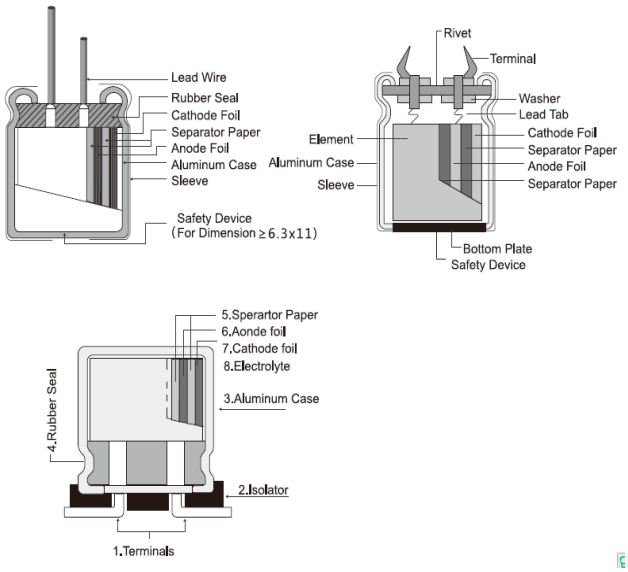


Fig-4 Construction of Aluminum Electrolytic Capacitors

1-3 Features of Capacitor Materials

Aluminum, which is main material in an aluminum electrolytic capacitor,forms an oxide layer (Al_2O_3) on its surface when the aluminum is set as anode and charged with electricity in elec-trolyte.The aluminum foil with an oxide layer formed thereon, as shown in Fig. 5, is capable of rectifying electriccurrent in elec-rolyte. Such a metal is called a valve metal.




Fig-5 V-I characteristics of aluminum oxide

<Anode aluminum foil>

First, the foil material is electromechanically etched in a chloride solution to extend the surface area of the foil.Secondly, for the foil to form a aluminum oxide layer (Al_2O_3) as a dielectric, more than the rated voltage is applied to the foil in a solu- tion such as ammonium borate. This dielectric layer is as dense and thin as 1.1 - 1.5 nm/volt and showing a high insulation resistance (108 - 109 Ω/m).The thickness of the oxide layer determines withstand voltage according to their direct proportional relationship.For the etching pits to be shaped to the intended thickness of the oxide ,the pit patterns have been designed to have efficient surface area exten- sion depending on the intended withsta voltage (see Fig. 6)

<Cathode aluminum foil>

An etching process is performed to the cathode aluminum foil as well as the anode foil. However, the formation process for oxide layer is generally not performed. Therefore, the surface of the cathode foil only has an oxide layer (Al_2O_3) that has spontane-ously formed, which gives a withstand voltage of about 0.5 volt

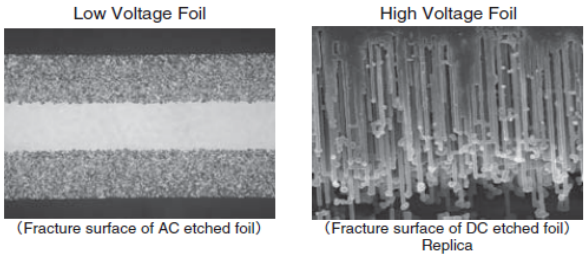


Fig-6 Cross section of aluminum etched foil (SEM)

<Electrolyte>

The electrolyte, an ion-conductive liquid functions as a true cathode coming into contact with the dielectric layer on the sur-face of the anode foil. The cathode foil serves as a collector electrode to connect the cathode with the external circuit. Electrolyte is an essential material that controls the perfor mance of the capacitor (temperature characteristics, frequency characteristics, service life, etc.).

<Paper separator >

The separator maintains uniform distribution of the electrolyte and keeps the anode-to-cathode foil distance unchanged.

<Can case and sealing materials>

An aluminum can case and seal materials mainly consisting of rubber are used for the purpose of keeping airtightness.

1-4 Manufacturing Process

① Etching (for extending the surface area)

This etching process serves to extend the surface area of the aluminum foil. This is an AC or DCcurrent-employed electrochem- ical process for etching the foil surface in a chloride solution(see Fig. 7)

② Formation (for forming a dielectric)

This is a process for forming a dielectric layer (Al_2O_3), which is normally performed on the anode aluminum foil.(see Fig. 8)

③ Slitting

This is a process for slitting alumi- n um foil s (both the anode and cathode) paper separators to the specified product size.(see Fig. 9)

④ Winding

This is a process for rolling a set of anode and cathode foils into a cylin drical form with a paper separator inserted between them. During this process, an inner terminal (called a tab) is attached to each of the alumi-num foils. The roll made at this process is called a capacitor element.

⑤ Impregnation

This is a process for impregnating the element with electrolyte as a true cathode. The electrolyte also functions to repair the dielectric ayer.(see Fig. 11)

⑥ Sealing

This process seals the element using the aluminum can case and sealing materials (rubber,rubber- lined cover, etc.) for keeping the case irtight.(see Fig. 12)

⑦ Aging (reforming)

The process of applying voltage to a post-sealed capacitor at high tem- perature is called “aging”. This serves to repair defective dielectrics that have been made on the foil during the slitting or winding process.


⑧ 100% inspection and packaging

After the aging, all products shall undergo testing for checking their electrical characteristics with chip termination, lead reforming, taping etc. finished, and then be packaged.


⑨ Outgoing inspections

Outgoing inspections are per - formed as per standard inspection procedures.

⑩ Shipment




see Fig. 7 Etching Model




see Fig. 8 Forming Model




see Fig. 9 Slitting Model



see Fig. 10 Cathode Foil



see Fig. 11 Impregnation

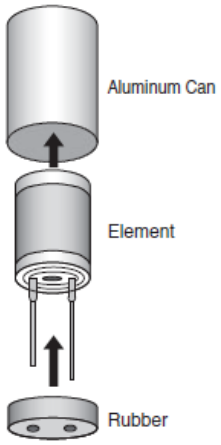

see Fig.12


2 . Basic Performance

2-1 Basic Electrical Characteristics

2-1-1 Capacitance

The larger the surface area of an electrode is, the higher the capacitance (capacity for storing electricity) is. For aluminum electrolytic capacitors, capacitance is measured under the standard .

of 20°C and a 120Hz AC signal of about 0.5V. Generally,as the temperature rises, the capaci-tance increases; as the temperature decreases, the capaci- tance decreases (Fig. 13). With a higher frequency, the capaci- tance is smaller; with a lower frequency, the capacitance is larger (Fig.14).

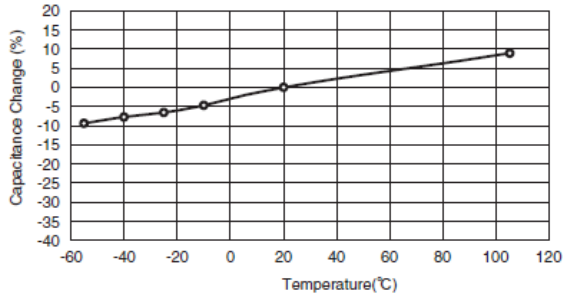

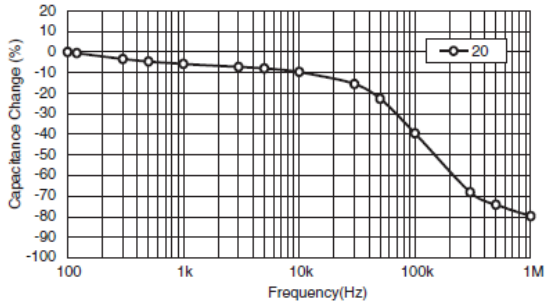


Fig-14 Frequency Characteristics of Capacitance

2-1-2 Tanδ(also called tangent of loss angle or dissip- ation factor)

(Fig. 15) is a simplified model of the equivalent circuit shown in (F For an ideal capacitor with an equivalent series resis- tance of R = 0, the tanδ shown in (Fig. 10) is zero. For an aluminum electrolytic capacitor, the equivalent series resistance (R) is not zero due to the presence of resistance of the electro- lyte and paper separator and other contact resistances. 1/ωC and R are correlated as shown in (Fig. 16) and Equation (2).




Fig-15 Simplified equivalent circuit




Fig-16 Dissipation Factor (tanδ)

$$\tan\delta = \frac{R}{1/\omega C} = \omega CR \quad \cdots\cdots (2)$$

$\omega : 2\pi f$

π=Circular constant、f : Frequency(f = 120Hz)

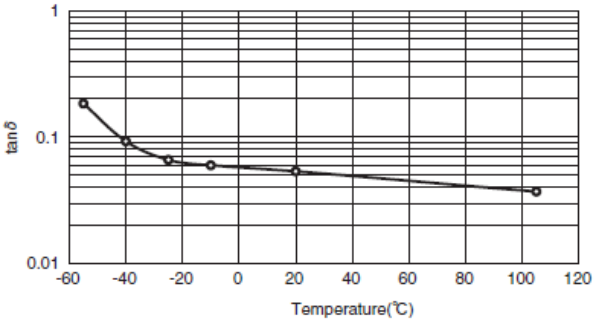


Fig-17 Temperature Characteristics of tanδ

2-1-3 Leakage Current (LC)

①As a feature of an aluminum electrolytic capacitor, when DC voltage is applied to it, the oxide layer that acts as a dielectric in the electrolyte allows a small amount of electric current to flow in it. The small amount

of current is called a leakage cur- rent (LC). An ideal capacitor does not allow the leakage current to flow (this is not the case for charging current).

②The leakage current (LC) changes with time as shown in (Fig. 18) value. Therefore, the specifications of LC are defined as a value of the rated voltage at 20°C. As the temperature rises, the LC increases; as the temperature decreases, the LC decreases (Fig.19). As the applied voltage decreases, the LC decreases.




Fig-18 Leakage Current vs. Time




Fig-19 Temperature Characteristics of Leakage Current

2-2 Frequency Characteristics of Impedance (Z)

①When a capacitor is applied with a voltage with the frequency changed, the impedance (Z), a factor of preventing the AC cur- rent changes as shown in (Fig. 14). This is the impedance-fre-quency characteristics of the capacitor.

②(Fig. 15) is a simplified model of an equivalent circuit of an aluminum electrolyte capacitor. (Fig. 20) shows dotted lines representing a breakdown of the impedance-frequency charac-teristic curve into components (C, R and L). As can be seen in this figure, the impedance-frequency characteristics are a com-position of C, R and L frequency characteristics.

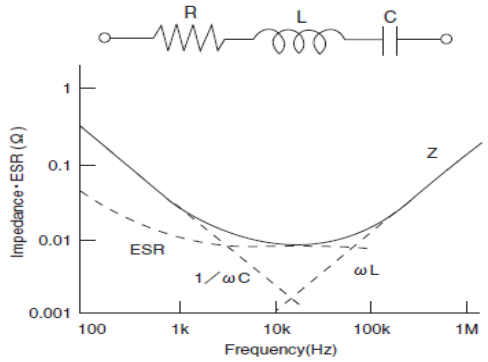


Fig-20 Factor of Impedance Frequency

③The value 1/ωC shows the pure capacitive reactance graphi-cally presented by a straight line going downward at an angle of 45°, and ωL shows the pure inductive reactance graphically presented by a straight line going upward at 45°. R shows the equivalent series resistance (ESR). At a range of lower frequencies, the R curve goes downward due to the dielectric loss frequency -dependence. At a range of higher frequencies, the R curve tends to be almost flat since resistance of electro- lyte and paper separator is dominant and independent on frequency. Equation (3) shows this tendency.

$$Z=\sqrt{R^2+\left(\omega L-\frac{1}{\omega C}\right)^2} \quad \cdots\cdots (3)$$

④Because the impedance characteristics of an aluminum elec-trolyte capacitor depend on resistance of the electrolyte and paper separator, the Z value at the self-resonant frequency tends to be relatively higher, as shown by the solid line in (Fig.21). The resistance of the electrolyte varies depending on tem- perature: as the temperature rises, the impedance decreases; and as the temperature decreases, the impedance increases,as shown in (Fig. 22).

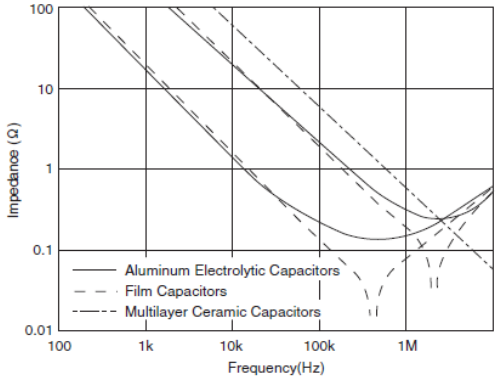


Fig-21 Frequency Characteristics of each Capacitors Impedance

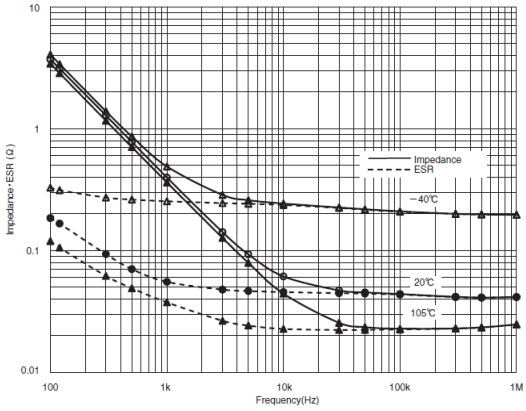


Fig-22 Temperature and Frequency Characteristics of Impedance・ ESR

3 . Reliability

For designing the device with aluminum electrolytic capacitors, a failure rate and useful life are necessary to be considered for their reliability. The failure rate of aluminum electrolytic capacitors is approximated by the bathtub curve shown in (Fig.23).

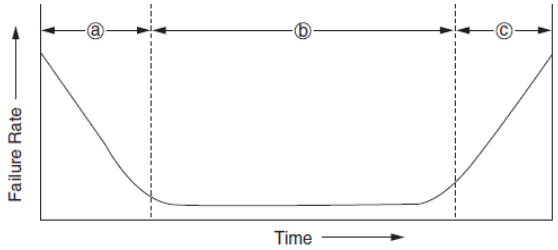


Fig-23 Bathtub curve

a Early failure period

At the comparatively early periods of use, devices/components fail by deficiencies in design or manufacturing process or incompatibility with operation conditions.For aluminum electrolytic capacitors, these defectives are removed by debugging at one of manufacturing processes before shipments.

b Random failure period

Failure is stable low in occurrence and appears unrelated to their served term. Aluminum electrolytic capacitors are low in catastrophic failures in this period compared with semi-conductors and solid tantalum capacitors.

c Wear-out failure period

In this period, the failure rate increases with the served time For aluminum electrolytic capacitors, since they were completed in manufacturing, the electrolyte impregnated has gradually evaporated and diffused out of the capacitors through the rubber seal materials with time, which leads to decrease in the capacitance and/or increase tanδ When any of these values changes beyond the allowable range of specifications, the capacitors are defined as “fell into the wear-out failure”. The served term until the capacitors fall into the wear-out failure period is called a useful life.

4 . Failure Modes

Aluminum electrolytic capacitors have two categories of failures catastrophic failure and wear-out failure.

<Catastrophic failure>

This is a failure mode that completely destroys the function of the capacitor such as short circuit and open circuit failure

<Wear-out failure>

This is a failure mode where the electrical parameters of the capacitor gradually deteriorate and fail. The criteria for determining if this failure has occurred depend on the purpose of a device. For each series of capacitors, the following electrical parameters have been defined as criteria in the specifications of Endurance in the catalogs or product specifications:

- Change in capacitance
- Tanδ
- Leakage current

①Failure rates are often measured in units of % per 1000 hours (10^{-5}/hour). For higher reliability devices designed with a smaller failure rate, units of Failure In Time (FIT) (10_{-9}/hour) is used.

②Aluminum electrolytic capacitors are considered as components of wear-out failure mode, the electrical characteristics of which gradually deteriorate and their failure rate increases with time. In general, the failure rate in FIT is determined by total component-

hours (product of the number of tested components and test hours).

③Due to the definition of FIT, the same FIT rate can be calculated in both cases of testing on the large number of tested components and also testing for long test periods of time. However, these cases mean differently for aluminum electrolytic capacitors. Using the failure rate is not suited to express the reliability of aluminum electrolytic capacitors, but the electrical characteristics based ifetime in hour should be considered to express the reliability.

④Also, there are MTBF (Mean Time Between Failures) and MTTF (Mean Time To Failure) to express reliability. The latter is appli- cable for aluminum electrolytic capacitors because they are categorized into a group of non-repairable systems, equipment and devices for which MTTF is applicable.Failure modes depend on the application conditions that lead to fail. (Fig. 24).

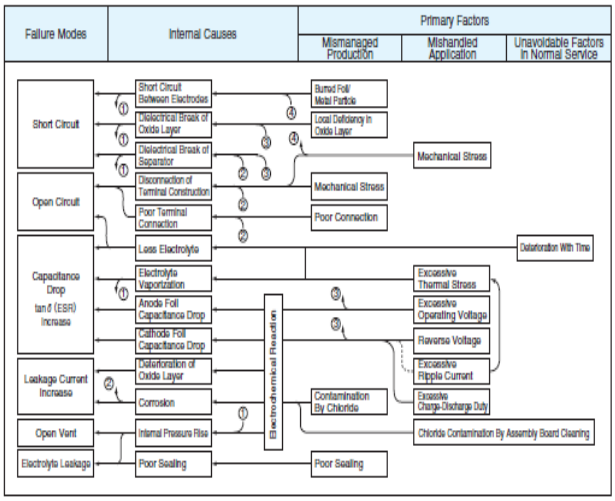


Fig-24 Failure Modes

5. Circuit Design

1) Operating Temperature, Equivalent Series Resistance(ESR), Ripple Current and Load Life

★ MTTF(Mean-Time-TO-Failure) means the useful life at room temperature 25℃.

1-1Load life:

If the capacitor's max. operating temperature is at 105℃(85℃), then after applying capacitor's rated voltage (WV) for L_0 hours at 105℃(85℃), the capacitor shall meet the requirements in detail specification.where L_0 is called "load life" or "useful life (lifetime) at 105℃(85℃)" .

$V_0 \leqq 100WV$: $L_x = L_0 \times 2^{(To-Tx)/10} \times 2^{-\triangle Tx/5}$

$V_0 \geqq 160WV$: $L_x = L_0 \times 2^{(To-Tx)/10} \times 2^{-\triangle Tx/5} \times (V_0/V_X)^{4.4}$

where $\triangle Tx = \triangle T0 \times (Ix / I0)^2$

1-2Ripple life:

If the capacitor's max. operating temperature is at 105℃(85℃), then after applying capacitor's rated voltage (WV) with the ripple current for Lr hours at 105℃(85℃), the capacitor shall meet the requirements in detail specification. where Lr is called "ripple life" or "useful ripple life(ripple lifetime) at 105℃(85℃)" .

$V0 \leqq 100WV$: $L_x = Lr \times 2^{(To-Tx)/10} \times 2^{(\triangle To - \triangle Tx)/5}$

$V0 \geqq 160WV$: $L_x = Lr \times 2^{(To-Tx)/10} \times 2^{(\triangle To - \triangle Tx)/5} \times (V_0/V_X)^{4.4}$

where $\triangle Tx = \triangle T0 \times (Ix / I0)^2$

The (ripple) life expectancy at a lower temperature than the specified maximum temperature may be estimated by the following equation, but this expectancy formula does not apply for ambient below +40℃.

L_0= Expected life period (hrs) at maximum operating temperature allowed.

Lr= Expected ripple life period (hrs) at maximum operating temperature allowed

Lx= Expected life period (hrs) at actual operating temperature

T_0= Maximum operating temperature (℃) allowed

Tx= Actual operating ambient temperature (℃)

Ix= Actual applied ripple current (mArms) at operating frequency f0 (Hz)

I_0= Rated maximum permissible ripple current IR(mArms) x frequency multiplier (Cf) at f0 (Hz)

V0=Rated voltage(V)

Vx=Actual applied voltage(V)

※Ripple Current calculation: no need Temperature Multiplying Factor.

※For Ripple life , Ix and Vx Should be 80% equal or more of Io and Vo,if less than 80%, calculate with 80%.

$\triangle T_0 \leqq 5$℃= Maximum temperature rise (℃) for applying I_0 (mArms)

△Tc=Temperature rise (℃) of capacitor case for applying Ix (mA/rms)

△Tx= Temperature rise (℃) of capacitor element for applying Ix (mArms) =Kc△Tc=Kc(Tc-Tx)

where Tc is the surface temperature (℃) of capacitor case

Tx= is ditto.

Kc= is transfer coefficient between element and case of capacitor from table below：from table below：

Φ	≦8	10	12.5/13	16	18	22	25	30	35
Kc	1.10	1.15	1.20	1.25	1.30	1.35	1.40	1.50	1.65

※ The estimated life is limited to 15 years, if it exceeds 15 years, take 15 years as standard.If 15 years or more may be required as an excepted lifetime, please consult us.

★ The formula of Equivalent Series Resistance (ESR)

The operating frequency of ESR, DF, f & C must be the same, usually they test at 120 Hz. $ESR = DF / 2\pi f C$……(2)

Where DF: Dissipation Factor(tanδ) f : Operating frequency(Hz)
C: Capacitance(F)

★ Estimation of life considering the ripple current

The ripple current affects the life of a capacitor because the internal loss (ESR) generates heat.The generated heat will be:

$P = I2 R$-------(3)

Where I : Ripple current(Arms.) R: ESR(Ω)

At this time the increase in the capacitor temperature will be:

$\triangle T = I2R / AH$------(4)

Where △T: Temperature increase in the capacitor core(degree)

I : Ripple current(Arms) R: ESR(Ω)

A: Surface area of the capacitor (cm^2)

H: Radiation coefficient(Approx.1.5~2.0´10^{-3} W/ cm^2 . ℃)

The above equation (4) shows that the temperature of a capacitor increases in proportion to the square of the applied ripple current and ESR, and in inverse proportion to the surface area. Therefore, the amount of the ripple current determines the heat generation, which affects the life. The values of △T varies depending on the capacitor types and operating conditions. The usage is generally desirable if △T remains less than 5℃.The measuring point for temper-ature increase due to ripple current is shown below.(Fig. 25).




Fig-

Precautions in Using(Non-Solid Aluminum Electrolytic Capacitor)

Ⅰ.Device circuits design considerations

1 .Confirm installation and operating requirements for capacitors, then use them within the performance limits prescribed in this catalog or product specifica- tions.

2. Polarity

Aluminum electrolytic capacitors are polariz

Never apply a reverse voltage or AC voltage. Connecting with wrong polarity will short-circuit or damage the capacitor with the pressure relief vent opening early on. To identify the polarity of a capacitor, see the relevant diagram in the catalogs or product specifications, or the polarity marking on the body of the capaci-tor. Incidentally, the rubber end seal bungs of the radial lead type capacitors have a solder-flux gas escaping configuration, which is nothing to do with the polarity of the capacitors. For circuits where the polarity is occasionally reversed, use a bi-polar type of aluminum electrolytic capacitor. However, note that even bi-polar type capacitors must not be used for AC circuits.

3.Operating voltage

Do not apply an over-voltage that exceeds a rated voltage speci- fied for the capacitors. The total peak value of the ripple voltage plus the DC voltage must not exceed the rated voltage of the capacitors. Although capacitors specify a surge voltage that exceeds the full rated voltage,it does not assure long-term use but limited use under specific conditions.

4. Ripple current

Do not apply an overcurrent that exceeds the rated ripple current specified for the capacitors. Excessive ripple current will increase heat production within the capacitors, causing the capacitors to be damaged as follows:

- Shorten lifetime
- Open pressure relief vent
- Short circuit

The rated ripple current is specified along with a specific ripple frequency. Where using the capacitors at any other ripple frequency other than the specified frequency, calculate the allowable ripple current by multiplying the rated ripple current by a frequency compensation factor(Frequency Multiplier) specified for each product series.

5. Operating temperature (Category temperature)

Do not apply high temperatures that exceed the upper limit of the category temperature range specified for the capacitors. Using the capacitor at temperatures higher than the upper limit will considerably shorten the lifetime of the capacitor and make the pressure relief vent open.

In other words, lowering ambient temperatures will extend the expected lifetime of the capacitors.

6) Lifetime

Select the capacitors to meet the service life requirements of a devic

7) Charging and discharging

Do not use capacitors in circuits intended for rapid charge and discharge cycle operations.

If capacitors are used in the circuits that repeat a charge and discharge with a large voltage drop or a rapid charge and discharge at a short interval cycle,capacitance will decrease and/or the capacitors will be damaged by internal heat generation.

Consult us for a heavy charge and discharge type of capacitor so that the capacitor will be designed in accordance with requirements of duty cycle of charge and discharge, the number of cycles, discharging resistance and operating temperatures.

8. Failure mode of capacitors

Non-solid aluminum electrolytic capacitors have a limited lifetime which ends in an open circuit failure mode, in general. Depending on the product type and operating conditions, the failure mode may involve in opening of the pressure relief vent.

9.Capacitor insulation

Electrically isolate the following sections of a capacitor from the negative terminal, the positive terminal and the circuit patterns.

- The outer can case of a non-solid aluminum capacitor.
- The dummy terminal of a snap-in type non-solid aluminum capacitor, which is designed for mounting stability.

10. Outer sleeve

The outer sleeve of a capacitor does not assure electrical insulation (except for screw-terminal type capacitors). It should not be used where electrical insulation is required.

11. Operating conditions

Do not use/expose capacitors to the following conditions:

① Direct contact with water, salt water or oil, or high condensa- tion environment.

② Direct sunlight.

③ Toxic gases such as hydrogen sulfide, sulfurous acid, nitrous acid, chlorine and its compounds, bromine and its compounds and mmonium.

④ Ozone, ultraviolet rays or radiation.


⑤ Extreme vibration or mechanical shock that exceeds limits in the catalogs or product specifications.

The standard vibration condition is applicable to JIS C 5101-4.

12. Mounting

① Non-solid aluminum electrolytic capacitors contain paper separa- tors and electric-conductive electrolyte that contains organic solvent as main solvent material, both of which are flammable. If the electrolyte leaks onto a printed circuit board, it can erode the device circuit pattern, may short-circuit the copper traces, smoke and burn. Make sure of designing a PC board as follows:

- Provide the appropriate hole spacing on the PC board to match the terminal spacing of a capacitor.
- Provide the following adequate clearance space over the pressure relief vent of a capacitor to avoid blocking the correct opening of the pressure relief vent.

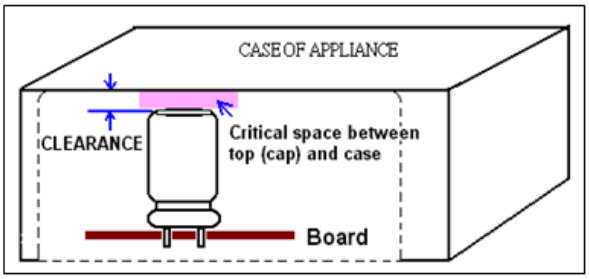

Case diameter	Clearance
Φ6.3 to Φ16 mm	≧2 mm
Φ18 to Φ 35 mm	≧3 mm
Φ40 mm &以上	≧5 mm

• Do not locate any wire or circuit pattern over the pressure relief ve of a capacitor.

• If a capacitor is mounted with its pressure relief vent facing down on the PC board, provide a ventilation hole in the board beneath it to let gas escape when the vent opens.

• Do not print any copper trace under the seal (terminal) side of a capacitor. Copper traces should be 1 mm (preferably 2mm or more) spaced apart from the side of the capacitor body.

• Avoid locating any heat source components near capacitors or on the opposite side of the PC board under capacitors.

• In designing a double-sided PC board, do not locate any through-hole via or unnecessary hole underneath a capacitor.

• In designing a double-sided PC board, do not print any circuit pattern underneath a capacitor.

② For a screw terminal type capacitor, tightening the terminal screv and the mounting clamp should be within the maximum torque specified in the catalogs or product specifi- cations. Do not mount a screw terminal type capacitor with the terminals facing downward. Also, if the body of a capaci- or is installed horizontally such as being laid on its side, do not position the pressure relief vent downward.

③ For a chip type capacitor, design the land patterns of the PC boai accordance with the recommended footprint dimen-sions described in the catalogs or product specifications

13. Using capacitors for significantly safety-oriented applications

Consult us about capacitors for a device application affecting human safety (①Aviation and aerospace ②Nuclear ③Medical ④ Vehicle)
or for any device whose failure will make an impact on society.Not that some products such as photoflash use capacitors which have been designed for specific applications cannot be used for any other application

14. Others

Design device circuits taking into consideration the following condi

① Electrical characteristics of a capacitor depend on the tempera ture and frequency. In designing the device circuits, consider the change in the characteristics.

② If using more than one capacitor connected in parallel, design th device circuits to balance the current flow in individual capacitors.

③ If using more than one capacitor connected in series, connect shunting resistors in parallel with the individual capacitors to balance the voltage.

Ⅱ.Installation

1.Assembling

① Do not try to reuse the capacitors once assembled and electri- fied, except only capacitors that are taken from a device for periodic inspection to measure their electrical characteristics.

② Capacitors may have been spontaneously recharged with time recovery phenomenon. In this case, through a resistor of approximately 1kΩ before use.

③ If non-solid aluminum electrolytic capacitors have been stored at any conditions more than 35℃ and 75%RH for long storage periods .of time more limits specified in catalogs or product specificas, they may current. In this case, make pre- conditioning by apply-ing the rated voltage through a resistor of approximately 1kΩ.

④ Confirm the rated capacitance and voltage of capacitors before installation.

⑤ Confirm the polarity of capacitors before installation.

⑥ Do not try to use the capacitors that were dropped to the floor and so forth.

⑦ Do not deform the can case of a capacitor.

⑧ Make sure that the terminal spacing of a capacitor equals the holes spacing on the PC board before installing the capaci- tor. For radial lead type capacitors, some standard pre-formed lead types are also available.

⑨ When installing a snap-in type capacitor on the PC board insert the terminals into the holes and press the capacitor down until the body is settled flush on the surface of the PC board (without the body standing off).

⑩ Do not apply excessive mechanical force to capacitors more than the limits prescribed in the catalogs or product specifi- cations. Avoid excessive mechanical force while the capaci- tors are in the process of vacuum-picking, placing and positioning by automatic mounting machines or cutting the lead wires by automatic insertion machines.

2. Soldering and heat resistance

① For soldering using a soldering iron, consider the following conditions:

• Soldering conditions (temperature and time) should be within the limits prescribed in the catalogs or product speci- fications.

• If it is necessary to pre-form the terminal spacing of a capaci- tor to match the hole spacing on the PC board before assembly and soldering, do not make mechanical stress reach into the body of the capacitor but only the lead wires.

• Do not touch the body of a capacitor with the hot tip of the soldering iron.

② For flow soldering, consider the following conditions:

• Do not dip the body of a capacitor into a solder bath. Expose only the terminals to the melt solder with the PC board interposing between the solder and the body of the capacitor. Solder only the reverse side of the PC board where the body of the capacitor is not located.

• Soldering conditions should be within the limits prescribed in the catalogs or product specifications.

• Do not apply flux to any part of a capacitor other than the terminals.

• Do not let any other component lean against nor come into contact with the capacitor while soldering.

③ For reflow soldering, consider the following conditions:

• Soldering conditions (preheat, reflow temperature and time) should be within the limits prescribed in the catalogs or product specifications.

• When using the infrared heater and setting its tempera- tures, adjust the heating levels taking into consideration that the color and materials of a capacitor vary in their infrared absorbance.

• The allowable number of reflow passes is specified in the catalogs or product specifications.

• When mounting a capacitor on the double-sided PC board, do not place any wiring pattern underneath the capacitor.

• Please consult us about vapor phase soldering (VPS).

④ Do not try to reuse the capacitor that was removed from the PC board after soldering.

⑤ Only use chip type capacitors for reflow soldering. The other type capacitors are not designed for the reflow.

3. Lead free type reflow soldering condition (For Surface Mount Aluminium Electrolytic Capacitors)

①For reflow, use a thermal condition system such as infrared radiation or hot blast.Vapor heat transfer systems are not recommended.


②Observe proper soldering conditions(temperature, time, etc. Do not exceed the specified limits.

③ Repeated reflowing :

• Avoid reflowing twice if possible.

• If repeated reflowing is unavoidable,contact us after measuring the first and the second reflow profiles and reflow interval at your side.

•Do not attempt to reflow three times.

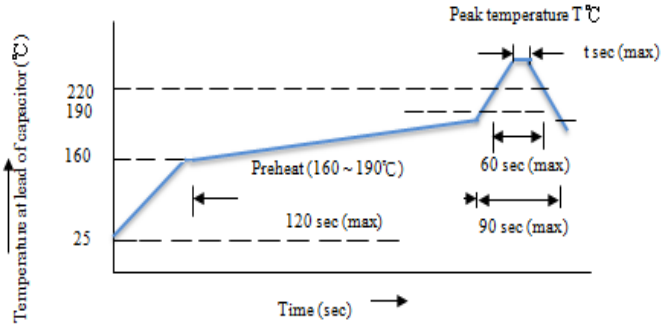

Size	T	t
φ4～φ5 (4V～50V)	250	10
	260	5
φ6.3～φ10 (4V～50V)	250	5
φ4～φ10 63～100V	250	5

4. Handling after soldering

After soldering the PC board, do not apply the following mechanical stress to the capacitor:

① Do not tilt, push down or twist the body of the capacitor.

② Do not grab the body of the capacitor to carry the assembly

③ Do not hit anything against the capacitor. When stacking the assembled boards, do not put any of the PC boards or other components against the capacitor.

④ Do not drop the assembled board.

5. Cleaning assembly boards

① Do not clean capacitors with the following cleaning agents:

• Halogenated solvents: cause capacitor failures due to corrosion.

• Alkali system solvents: corrode (dissolve) the aluminum can case.

• Terpene and petroleum system solvents: deteriorate the rubber seal materials.

• Xylene: deteriorates the rubber seal materials as well.

• Acetone: erases the markings printed on a capacitor.

Where cleaning is necessary, use only solvent resistant type capacitors that have been assured for the cleaning within the specific cleaning conditions prescriber in the catalogs or product specifications.

In particular, carefully set up the conditions for ultrasonic cleaning system.

② Where cleaning the solvent resistance type of aluminum electrolytic capacitors, confirm the following conditions:

• Control the contamination (the conductivity, pH, specific gravity, water content, etc.) of the cleaning agents.

• After the cleaning, do not leave the capacitors (assembly boards) in an environment of cleaning agent-rich or in a closed container. Sufficiently evaporate the residual clean- ing agent from the assembly boards and the capacitors by forced hot air at temperatures less than the upper limit of category temperature range for more than10 minutes.

In general, aluminum electrolytic capacitors are sensitive to contamination of halogen ions (particularly to chlorine ion.) Depending on the properties of the electrolyte and rubber seal materials used in a capacitor, the halogen ions lead up to catastrophic failures on the capacitor. Where the inside of a capacitor has been contaminated with more than a certain amount of halogen ions and the capacitor is in use, the corrosion reaction of aluminum occurs. The corrosion causes the the capacitor to have a significant increase in leakage current with heat produced, open the pressure relief vent and become open circuit

Due to global environmental issues (greenhouse effects and other environmental destruction by depletion of the ozone layer), the conventional cleaning solvents of CFC113, Trichloroethylene and 1,1,1-trichloroethylene were replaced by substitutes.

The following are some substitute cleaning agents and allowable cleaning conditions:

a) Fatty-alcohol cleaning agents

Pine Alpha ST-100S (Arakawa Chemical)

Clean Through 750H, 750K, 750L and 710M (Kao)

Technocare FRW-14, 15, 16 and 17 (Momentive Perfor- mance Materials)

[Cleaning conditions]

Either of immersion or ultrasonic cleaning, for a maximum of 10 minutes and at a maximum liquid temperature of 60℃ is acceptable. Make that the markings on the capacitor are not rubbed against any other component or the PC board during cleaning. Note that shower cleanin affects the markings on the capacitor.

b) HCFC (Freon 225) as Alternative CFCs

AK225AES (Asahi Glass)

[Cleaning conditions]

Solvent resistant type capacitors, which were originally developed to intend to resist Freon TE or Freon TES, are also capable of withstanding any one of immersion, ultrasonic or vapor cleaning, for a maximum of 5 minutes (or 2 minutes for KRE and KRE-BP series capacitors or 3 minutes for SRM series). However, this type of cleaning agent is not recom- mended to use, as the cleaning materials may be banned in near future in view of global environmental issues.

c) IPA (Isopropyl Alcohol)

Immersion cleaning with a maximum flux concentration of 2 wt% is acceptable.

6. Adhesives and coating materials

① Do not use any adhesive or coating materials containing halogenated solvents.

② Make sure of the following conditions before applying adhesive or coating materials to a capacitor,

• No flux residue nor stain is left between the rubber seal of a capacitor and PC board.

• Dry the capacitor to remove residual cleaning agents before applying adhesive and coating materials. Do not cover up the entire surface of the rubber seal of the capacitor with adhesives or coating materials.

• Heating and curing conditions for adhesives and coating materi- als should be followed as prescribed in the catalogs or product specifications.

• Covering up the entire surface of the rubber seal with resin mold materials will obstruct the normal diffusion of internal hydrogen gas from a capacitor and result in serious failures. Also, where the adhesive and coating materials contain a large amount of halogen ions, the halogen ions will contaminate the inside of the capacitor through the rubber seal materials, causing the capacitor to become a failure.

• Depending on solvent materials that the adhesive or coating materials contains, note that the outer sleeve of a capacitor may lose a gloss or whiten in appearance.

7. Fumigation

In exporting or importing electronic devices, they may be exposed to fumigation with halide such as methyl bromide. Where aluminum electrolytic capacitors are exposed to halide such as methyl bromide, the capacitors will be damaged with the corrosion reaction with halogen ions in the same way as clean- ing agents. For the export and import, Our Company considers using some packaging method and so forth so that fumigation is not required. For customers to export or import electronic devices, semi-assembly products or capacitor compo- nents, confirm if they will be exposed to fumigation and also consider final condition of packaging. (Note that either cardboard or vinyl package has a risk of fumigation gas penetration.)

Ⅲ.Precautions during operation of devices

1 . Never touch the terminals of a capacitor directly with bare hands.

2 . Do not short-circuit between the capacitor terminals with anything conductive Also, do not spill any conductive liquid such as acid or alkaline solution over a capacitor.

3 . Confirm environmental conditions where the device will be placed. Do not use the devise in the following environmental conditions:

① Water or oil spatters, or high condensation environment

② Direct sunlight.

③ Ozone, ultraviolet rays or radiation.

④ Acidic or alkaline toxic gases such as hydrogen sulfide, sulfuric acid, nitrous acid, chlorine and its compounds, bromine and its compounds and ammonium.

⑤ Severe vibration or mechanical shock conditions beyond the limits prescribed in the catalog or product specifica- tion.

Ⅳ.Maintenance inspections

1 . For industrial use capacitors, make periodic inspections the capacitors.

Before the inspections, turn off the power supply of the device and discharge the electricity of the capacitors. Where checking it by a volt- ohm meter, confirm the polarity beforehand. Do not apply mechanical stress to the terminals of the capacitors during inspection.

2 . Characteristics to be inspected

① Significant damage in appearance: vent opening, electro-lyte leakage etc.

② Electrical characteristics: leakage current, capacitance,tanδ and other characteristics prescribed in the catalogs or product specifications

If finding anything abnormal on the characteristics above, check the specifications of the capacitor and take appropriate actions such as replacement.

Ⅴ.Capacitor venting

1 . A capacitor with more than a certain case size has the pressure relief vent functioning to escape abnormal gas pressure increase.

If gas expels from a venting capacitor, disconnect the power supply of the device or unplug the power supply cord. If not disconnecting the power supply, the device circuit may be damaged due to the short circuit failure of the capacitor or short-circuited with the liquid that the gas was condensed to. It may cause secondary damages such as device burnout in the worst case scenario.

The gas that comes out of the open vent is vaporized electro- lyte, not smoke.

2 . The gas expelled from a venting capacitor is more than100°C. Never expose your face to the capacitor. If your eyes are exposed to the gas or you inhale it, immediately flush your eyes and/or gargle with water. If the electrolyte comes in contact with the skin, wash with soap and water.

Ⅵ.Storage

1 . Do not store capacitors at high temperature or high humidity. Store the capacitors indoors at temperatures of 5 to 35℃ and humidities of less than 75%RH.
In principle, aluminum electrolytic capacitors should be used within one years (Surface Mount is two years) after production.

2 . Keep capacitors packed in the original packaging material wherever possible.

3 . Avoid the following storage environmental conditions:

① Water spattering, high temperatures, high humidity or condensa-tion environment.

② Oil spattering or oil mist filled.

③ Salt water spattering or salt filled.

④ Acidic toxic gases such as hydrogen sulfide, sulfuric acid, nitrous acid, chlorine, bromine and methyl bromide filled.

⑤ Alkaline toxic gases such as ammonium filled.

⑥ Acid or alkaline solutions spattering.

⑦ Direct sunlight, ozone, ultraviolet rays or radiation.

⑧ Extreme vibration or shock loading.

Ⅶ.Capacitor disposal

Please consult with a local organization for the proper disposal of industrial waste. For incinerating capacitors, apply a high-temperature incineration (over 800℃). Incinerating them at temperatures lower than that may produce toxic gases such as chlorine. To prevent capacitors from explosion, punch holes in or sufficiently crush the can cases of the capacitors, then incinerate.

Jamicon Series：VP
Teapo Series：VP Standard Series






- Endurance:105℃,2000hrs
- Recommended Applications:Automotive,Smart Meter,Panel,Audio
- Corresponding product to RoHS
- AEC-Q200 qualified


Specifications


Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	2.5~25VDC
Rated Capacitance Range	22~ 1500μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	Less than or equal to the value of Table ,(After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tan δ) (120Hz ,20℃)	WV 2.5~25 tan δ 0.12
Endurance	After applying rated voltage for 2000 hours at 105℃,Stay back to 20℃ Temperature measurement, the capacitor shall meet the following requirement. Appearance: No significant damage Capacitance Change: Within ±20% of the initial value Dissipation Factor: Not more than 150% of the initial specified value Equivalent Series Resistance: Not more than 150% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃ ，the capacitors shall meet the requirement as Endurance.
Resistance to Soldering Heat＊	Capacitance Change: Within ±10% of the initial value Dissipation Factor: Not more than the initial specified value Equivalent Series Resistance: Not more than the initial specified value Leakage Current: Not more than the initial specified value


Diagram of Dimensions

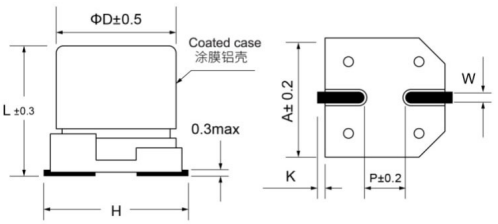

Marking : case with red printing

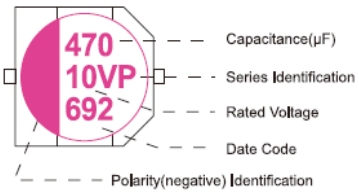





	SIZE	ΦD x L	A	H(Max)	W	P	K
Standard Version	CA1	5x5.8	5.3	6.5	0.65±0.15	1.5±0.2	0.35+0.15/-0.2
	EA1	6.3x5.8	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	EA4	6.3x7.7	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	GA9	8x9.0	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2

	SIZE	ΦD x L	A	H(Max)	W	P	K
Anti-Standard Version	EA4	6.3x7.7	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	GA9	8x9.0	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2

Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.05	0.30	0.70	1.00

Jamicon Series：VP

Teapo Series：VP

■Dimensions,Rated Ripple Current,Equivalent Series Resistance


Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃100KHz)	ESR (mΩ,20℃ 100KHz)	LC (μA max/2min)
2.5（2.88）	180	5x5.8	1970	30	300
		6.3x5.8	2200	25	300
	220	6.3x5.8	2500	25	300
	390	6.3x7.7	2720	23	300
	470	6.3x7.7	2720	23	300
	1000	8x10.4	3950	18	500
	1200	10x10.2	4000	12	600
	1500	10x10.2	4000	13	750
		10x12.2	5500	10	750
4(4.6)	100	6.3x5.8	2450	26	300
	150	6.3x5.8	2450	26	300
	330	6.3x7.7	2650	25	300
	560	8x10.4	3950	18	448
	820	8x10.4	3950	18	656
		10x12.2	5500	10	656
	1200	10x10.2	4000	12	960
		10x12.2	5500	10	960
6.3(7.25)	47	5x5.8	1380	35	300
	68	6.3x5.8	2400	27	300
	82	6.3x5.8	2400	27	300
	100	5x5.8	1380	35	300
		6.3x5.8	2400	27	300
	120	6.3x5.8	2400	27	300
	220	6.3x5.8	2400	27	300
		6.3x7.7	2650	25	300
	330	6.3x5.8	2400	27	415
		6.3x7.7	2650	25	415
	470	6.3x7.7	2650	25	592
		8x10.4	3610	21	592
	680	8x10.4	3610	21	857
		10x10.2	3650	12	857
	820	8x10.4	3610	21	1033
		10x10.2	3650	12	1033
		10x12.2	5500	10	1033
	1000	8x10.4	3610	21	1260
		10x12.2	5500	10	1260
10(11.5)	22	5x5.8	1270	40	300
	33	5x5.8	1270	40	300
	47	5x5.8	1270	40	300
		6.3x5.8	2250	31	300
	56	6.3x5.8	2250	31	300
	100	6.3x5.8	2250	31	300
		6.3x7.7	2560	27	300

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃100KHz)	ESR (mΩ,20℃ 100KHz)	LC (μA max/2min)
10(11.5)	150	6.3x7.7	2560	27	300
	390	8x10.4	3020	22	780
	470	10x10.2	3500	14	940
		10x12.2	5300	12	940
	560	10x12.2	5300	12	1120
	1000	10x12.2	5300	13	2000
16(18.4)	22	5x5.8	1210	90	300
	33	6.3x5.8	2050	37	300
	39	6.3x5.8	2050	37	300
	47	6.3x5.8	1600	50	300
	82	6.3x7.7	2420	30	300
	100	6.3x7.7	2420	30	320
	120	6.3x7.7	2420	30	384
	150	8x10.4	3490	23	480
	180	8x10.4	3490	23	576
	220	8x10.4	3490	23	704
		10x12.2	5050	14	704
	270	8x10.4	3490	23	864
	330	10x10.2	3100	16	1056
	330	10x12.2	5050	14	1056
	390	8x10.4	3000	23	1248
	470	10x10.2	3100	16	1504
		10x12.2	5050	14	1504
	560	10x12.2	5050	14	1792
	680	10x12.2	5050	14	2176
	820	10x12.2	5050	14	2624
20(23)	22	6.3x5.8	1650	50	300
	47	6.3x7.7	2000	45	300
	100	8x10.4	3320	24	480
	150	10x12.2	4220	21	600
25(28.75)	22	6.3x5.8	900	65	300
		6.3x7.7	1800	50	300
	27	6.3x5.8	1270	60	300
	47	6.3x5.8	1300	65	300
		6.3x7.7	1800	45	300
	68	6.3x7.7	1800	45	340
	100	8x10.4	3320	35	500
	150	8x10.4	3320	35	750
	180	10x10.2	3100	30	900
	220	8x9.0	2500	45	1100
		8x10.4	3320	35	1100
	270	10x10.2	3320	30	1350
	330	10x12.2	3500	28	1650

JAMICON SMD Type Conductive Polymer Aluminum Solid Capacitors TEAPO

Jamicon Series：VB
Teapo Series：VB

High capacitance & low ESR Series






- Endurance:105℃,2000hrs
- Recommended Applications: New energy,Network,Home appliance,Motherboard
- Corresponding product to RoHS
- AEC-Q200 qualified


Specifications


Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	2.5~80VDC
Rated Capacitance Range	22~ 1200μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	Less than or equal to the value of Table ,(After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tan δ) (120Hz ,20℃)	WV 2.5~80 tan δ 0.12
Endurance	After applying rated voltage for 2000 hours at 105℃,Stay back to 20℃ Temperature measurement, the capacitor shall meet the following requirement. Appearance: No significant damage Capacitance Change: Within ±20% of the initial value Dissipation Factor: Not more than 150% of the initial specified value Equivalent Series Resistance: Not more than 150% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃ ，the capacitors shall meet the requirement as Endurance.
Resistance to Soldering Heat＊	Capacitance Change: Within ±10% of the initial value Dissipation Factor: Not more than the initial specified value Equivalent Series Resistance: Not more than the initial specified value Leakage Current: Not more than the initial specified value


Diagram of Dimensions

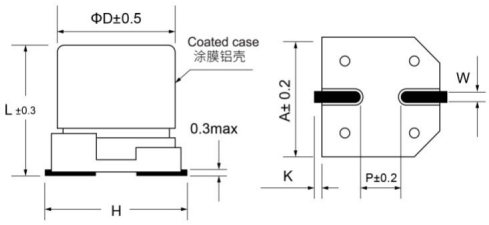

Marking : case with red printing

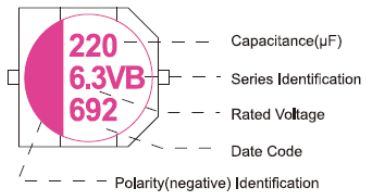





	SIZE	ΦD x L	A	H(Max)	W	P	K
Standard Version	EA1	6.3x5.8	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	EA4	6.3x7.7	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2

	SIZE	ΦD x L	A	H(Max)	W	P	K
Anti-Standard Version	EA4	6.3x7.7	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2

Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.05	0.30	0.70	1.00

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：VB

Teapo Series：VB

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃100KHz)	ESR (mΩ,20℃ 100KHz)	LC (μA max/2min)
2.5（2.88）	330	6.3x5.8	3160	15	300
	390	6.3x5.8	3160	15	300
	470	6.3x5.8	3160	15	300
	560	6.3x5.8	3500	16	300
		6.3x7.7	3600	13	300
	820	8x10.4	4210	12	410
4(4.6)	270	6.3x5.8	3160	15	300
	330	6.3x5.8	3160	15	300
	470	8x10.4	4520	15	376
	560	8x10.4	4520	15	448
6.3(7.25)	100	6.3x5.8	2500	24	300
	120	6.3x5.8	2500	24	300
	150	6.3x5.8	3160	22	300
	220	6.3x5.8	3160	22	300
	330	6.3x5.8	3390	22	415
		6.3x7.7	3500	18	415
		8x10.4	4210	15	415
	470	6.3x7.7	3500	18	592
		8x10.4	4210	15	592
	560	8x10.4	4210	15	705
		10x10.2	5025	12	705
	820	8x10.4	4210	15	1033
		10x10.2	5025	12	1033
	1200	10x10.2	5025	12	1512
10(11.5)	120	6.3x5.8	2600	22	300
	150	6.3x7.7	2880	21	300
	330	8x10.4	4000	17	660
	470	10x10.2	5025	12	940

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃100KHz)	ESR (mΩ,20℃ 100KHz)	LC (μA max/2min)
16(18.4)	68	6.3x5.8	2440	25	300
		6.3x7.7	2700	24	300
	100	6.3x5.8	2440	25	320
		6.3x7.7	2700	24	320
	180	6.3x7.7	3320	22	576
		8x10.4	3890	18	576
	220	8x10.4	3890	18	704
	270	8x10.4	3890	18	864
	330	10x10.2	4350	16	1056
	470	10x12.2	6100	10	1504
25(28.8)	33	6.3x7.7	2500	45	300
	47	6.3x7.7	2500	45	300
35(40.25)	22	6.3x5.8	1800	55	300
	47	6.3x7.7	2200	50	329
	100	8x10.4	2600	27	700
	150	10x10.2	2800	25	1050
50(57.50)	22	6.3x7.7	2000	55	300
	47	8x10.4	2200	50	470
	100	10x12.2	2500	30	1000
63(72.45)	33	8x10.4	1500	45	416
	56	10x10.2	1800	40	706
	100	10x12.2	2550	35	1260
80(92.00)	47	10x10.2	2250	40	752
		10x12.2	2500	35	752

Jamicon Series：VS
Teapo Series：VS Long Life & low ESR Series






- Endurance:105℃,5000hrs
- Recommended Applications:Network,Smart Meter,Router,Printer
- Corresponding product to RoHS
- AEC-Q200 qualified


Specifications


Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	4~80VDC
Rated Capacitance Range	22~ 470μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	Less than or equal to the value of Table ,(After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tan δ) (120Hz ,20℃)	WV 4~80 tan δ 0.12
Endurance	After applying rated voltage for 5000 hours at 105℃,Stay back to 20℃ Temperature measurement, the capacitor shall meet the following requirement. Appearance: No significant damage Capacitance Change: Within ±20% of the initial value Dissipation Factor: Not more than 150% of the initial specified value Equivalent Series Resistance: Not more than 150% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃ ，the capacitors shall meet the requirement as Endurance.
Resistance to Soldering Heat＊	Capacitance Change: Within ±10% of the initial value Dissipation Factor: Not more than the initial specified value Equivalent Series Resistance: Not more than the initial specified value Leakage Current: Not more than the initial specified value


Diagram of Dimensions

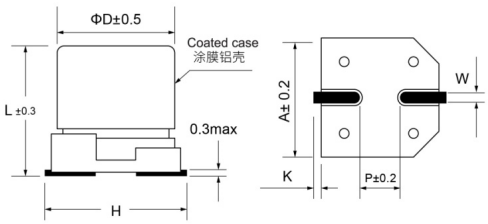

Marking : case with red printing

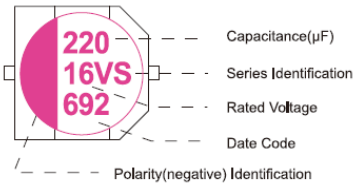





	SIZE	ΦD x L	A	H(Max)	W	P	K
Standard Version	EA1	6.3x5.8	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	EA4	6.3x7.7	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2

	SIZE	ΦD x L	A	H(Max)	W	P	K
Anti-Standard Version	EA4	6.3x7.7	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2

Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.05	0.30	0.70	1.00

Jamicon Series：VS

Teapo Series：VS

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃100kHz)	ESR (mΩ,20℃ 100kHz)	LC (μA max/2min)
4（4.6）	150	6.3x5.8	2570	22	300
	330	6.3x5.8	2800	22	300
	470	6.3x7.7	3000	20	376
6.3(7.25)	100	6.3x5.8	2800	22	300
	120	6.3x5.8	2800	22	300
	220	6.3x5.8	2800	22	300
	470	10x10.2	4130	15	592
10(11.5)	47	6.3x5.8	2300	27	300
	56	6.3x5.8	2300	27	300
	68	6.3x5.8	2300	27	300
	120	6.3x5.8	2300	27	300
	470	8x10.4	3000	22	940
16(18.4)	39	6.3x5.8	2200	30	300
	68	6.3x5.8	2200	30	300
	330	10x12.2	3800	14	1056
20(23)	27	6.3x5.8	2450	40	300
	180	10x10.2	3200	25	720

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃100kHz)	ESR (mΩ,20℃ 100kHz)	LC (μA max/2min)
25(28.75)	100	6.3x7.7	2200	50	500
	150	8x10.4	2800	30	750
	220	10x10.2	2500	38	1100
	330	10x12.2	2800	30	1650
35(40.25)	47	6.3x5.8	1000	80	329
	68	6.3x7.7	2000	60	476
	150	8x10.4	2500	30	1050
	270	10x12.2	3000	28	1890
50(57.50)	22	6.3x7.7	1800	60	300
	47	8x10.4	2000	55	470
	100	10x12.2	2100	35	1000
63(72.45)	33	8x10.4	1200	50	416
	56	10x10.2	1500	45	706
	100	10x12.2	2000	35	1260
80(92.00)	47	10x10.2	2000	45	752
	68	10x12.2	2200	40	1088

Jamicon Series：VA
Teapo Series：VA Long Life15000hrs Series






- Endurance:105℃,15000hrs
- Recommended Applications:Power Supply,Projector,Network,Printer
- Corresponding product to RoHS
- AEC-Q200 qualified


Specifications


Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	6.3~50VDC
Rated Capacitance Range	47~ 1500μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	Less than or equal to the value of Table ,(After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tan δ) (120Hz ,20℃)	WV 6.3~50 tan δ 0.12
Endurance	After applying rated voltage for 15000 hours at 105℃,Stay back to 20℃ Temperature measurement, the capacitor shall meet the following requirement. Appearance: No significant damage Capacitance Change: Within ±20% of the initial value Dissipation Factor: Not more than 150% of the initial specified value Equivalent Series Resistance: Not more than 150% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃ ，the capacitors shall meet the requirement as Endurance.
Resistance to Soldering Heat＊	Capacitance Change: Within ±10% of the initial value Dissipation Factor: Not more than the initial specified value Equivalent Series Resistance: Not more than the initial specified value Leakage Current: Not more than the initial specified value


Diagram of Dimensions

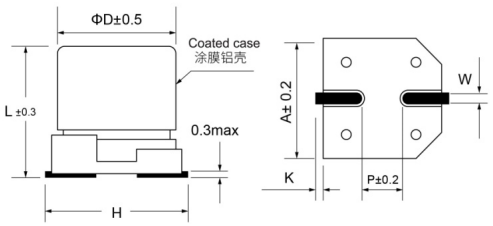

Marking : case with red printing

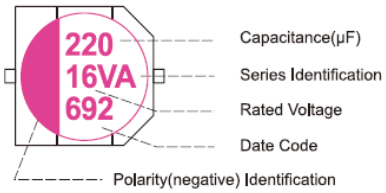





	SIZE	ΦD x L	A	H(Max)	W	P	K
Standard Version	EA1	6.3x5.8	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	EA4	6.3x7.7	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	GA9	8x9.0	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2

	SIZE	ΦD x L	A	H(Max)	W	P	K
Anti-Standard Version	EA4	6.3x7.7	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	GA9	8x9.0	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2

Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.05	0.30	0.70	1.00

Jamicon Series：VA

Teapo Series：VA

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃100KHz)	ESR (mΩ,20℃ 100KHz)	LC (μA max/2min)
6.3(7.25)	220	6.3x5.8	2400	50	300
	470	6.3x7.7	2600	45	592
	820	8x10.4	3200	35	1033
	1500	10x10.2	4500	25	1890
10(11.5)	120	6.3x5.8	2000	45	300
	330	6.3x7.7	2400	40	660
	470	8x10.4	2800	35	940
	820	10x10.2	3500	35	1640
16(18.4)	100	6.3x5.8	2000	50	320
	180	6.3x7.7	2500	40	576
	330	8x10.4	3000	35	1056
	470	10x10.2	3200	30	1504
25(28.75)	47	6.3x5.8	1100	80	300
	100	6.3x7.7	1800	70	500
	220	8x10.4	2600	45	1100
	330	10x12.2	2800	40	1650
35（40.25）	100	8x9.0	1500	40	700
		8x10.4	1800	30	700
	220	10x10.2	2000	25	1540
	270	10x12.2	2500	24	1890
50（57.5）	47	8x10.4	1700	50	470
	100	10x10.2	1800	45	1000
	150	10x12.2	2100	42	1500

Jamicon Series：VD
Teapo Series：VD Long Life20000hrs Series






- Endurance:105℃,20000hrs
- Recommended Applications:Power Supply,Projector,Network
- Corresponding product to RoHS
- AEC-Q200 qualified


Specifications


Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	6.3~25VDC
Rated Capacitance Range	22~ 1000μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	Less than or equal to the value of Table ,(After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tan δ) (120Hz ,20℃)	WV 6.3~25 tan δ 0.12
Endurance	After applying rated voltage for 20000 hours at 105℃, Stay back to 20℃ Temperature measurement,the capacitor shall meet the following requirement. Appearance: No significant damage Capacitance Change: Within ±20% of the initial value Dissipation Factor: Not more than 150% of the initial specified value Equivalent Series Resistance: Not more than 150% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃ ，the capacitors shall meet the requirement as Endurance.
Resistance to Soldering Heat＊	Capacitance Change: Within ±10% of the initial value Dissipation Factor: Not more than the initial specified value Equivalent Series Resistance: Not more than the initial specified value Leakage Current: Not more than the initial specified value


Diagram of Dimensions

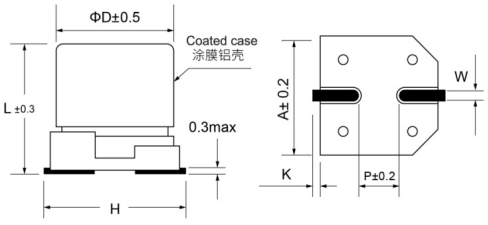

Marking : case with red printing

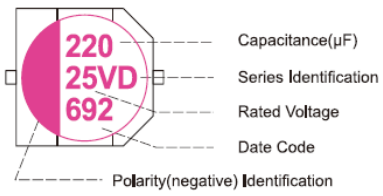





	SIZE	ΦD x L	A	H(Max)	W	P	K
Standard Version	EA1	6.3x5.8	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	EA4	6.3x7.7	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2

	SIZE	ΦD x L	A	H(Max)	W	P	K
Anti-Standard Version	EA4	6.3x7.7	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2

Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.05	0.30	0.70	1.00

Jamicon Series：VD

Teapo Series：VD

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃100KHz)	ESR (mΩ,20℃ 100KHz)	LC (μA max/2min)
6.3(7.25)	150	6.3x5.8	2000	55	300
	330	6.3x7.7	2400	50	415
	470	8x10.4	3000	40	592
	1000	10x10.2	4000	30	1260
10(11.5)	100	6.3x5.8	1800	55	300
	220	6.3x7.7	2200	45	440
	330	8x10.4	2500	40	660
	470	10x10.2	3200	40	940
16(18.4)	68	6.3x5.8	1800	60	300
	150	6.3x7.7	2000	50	480
	270	8x10.4	2800	40	864
	470	10x10.2	3000	35	1504
25(28.75)	22	6.3x5.8	800	85	300
	56	6.3x7.7	1100	75	300
	100	8x10.4	2500	50	500
	220	10x10.2	2200	55	1100
	330	10x12.2	2400	45	1650

JAMICON SMD Type Conductive Polymer Aluminum Solid Capacitors TEAPO

Jamicon Series：VQ
Teapo Series：VQ Low ESR Series






- Endurance:125℃,2000hrs
- Recommended Applications:Automotive,Charger,New energy,Power Supply
- Corresponding product to RoHS
- AEC-Q200 qualified


Specifications


Item	Characteristics
Category Temperature Range	-55 ~ +125℃
Rated Voltage Range	2.5~80VDC
Rated Capacitance Range	22~ 1500μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	Less than or equal to the value of Table ,(After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tan δ) (120Hz ,20℃)	WV 2.5~80 tan δ 0.12
Endurance	After applying rated voltage for 2000 hours at 125℃, Stay back to 20℃ Temperature measurement,the capacitor shall meet the following requirement. Appearance: No significant damage Capacitance Change: Within ±20% of the initial value Dissipation Factor: Not more than 150% of the initial specified value Equivalent Series Resistance: Not more than 150% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃ ，the capacitors shall meet the requirement as Endurance.
Resistance to Soldering Heat＊	Capacitance Change: Within ±10% of the initial value Dissipation Factor: Not more than the initial specified value Equivalent Series Resistance: Not more than the initial specified value Leakage Current: Not more than the initial specified value


Diagram of Dimensions

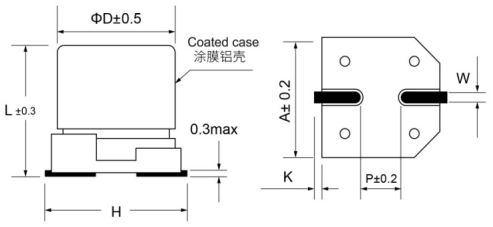

Marking : case with red printing

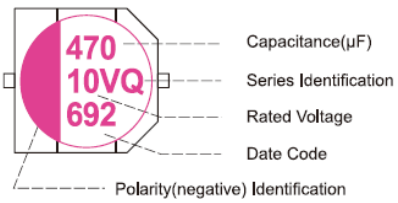





	SIZE	ΦD x L	A	H(Max)	W	P	K
Standard Version	CA1	5x5.8	5.3	6.5	0.65±0.15	1.5±0.2	0.35+0.15/-0.2
	EA1	6.3x5.8	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	EA4	6.3x7.7	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2

	SIZE	ΦD x L	A	H(Max)	W	P	K
Anti-Standard Version	EA4	6.3x7.7	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2

Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.05	0.30	0.70	1.00

Jamicon Series：VQ
Teapo Series：VQ

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE(mA/rms,100kHz)		ESR (mΩ,20℃ 100kHz)	LC (μA max/2min)
			Tx：125℃	Tx：105℃		
2.5（2.88）	220	6.3x5.8	790	2500	40	300
	390	6.3x7.7	859	2720	30	300
	470	6.3x7.7	859	2720	30	300
	1000	8x10.4	1248	3950	25	500
	1500	10x10.2	1264	4000	20	750
		10x12.2	1740	5500	16	750
4(4.6)	100	6.3x5.8	445	2450	35	300
	330	6.3x7.7	837	2650	30	300
	560	8x10.4	1250	3950	25	448
	820	8x10.4	1250	3950	25	656
		10x12.2	1738	5500	18	656
	1200	10x10.2	1265	4000	20	960
		10x12.2	1738	5500	18	960
6.3(7.25)	47	5x5.8	436	1380	50	300
	68	6.3x5.8	758	2400	40	300
	100	5x5.8	436	1380	50	300
		6.3x5.8	758	2400	35	300
	220	6.3x5.8	758	2400	35	300
		6.3x7.7	840	2650	30	300
	330	6.3x5.8	760	2400	35	415
		6.3x7.7	840	2650	30	415
	470	6.3x7.7	840	2650	30	592
		8x10.4	1140	3610	25	592
	680	8x10.4	1140	3610	25	857
		10x10.2	1153	3650	20	857
	820	10x10.2	1153	3650	20	1033
		10x12.2	1740	5500	15	1033
	1000	8x10.4	1140	3610	26	1260
		10x12.2	1740	5500	15	1260
10(11.5)	22	5x5.8	400	1270	50	300
	33	5x5.8	400	1270	50	300
	47	5x5.8	400	1270	50	300
	56	6.3x5.8	710	2250	40	300
	100	6.3x5.8	710	2250	40	300
		6.3x7.7	808	2560	33	300
	150	6.3x7.7	808	2560	35	300
	390	8x10.4	955	3020	28	780
	470	10x10.2	1106	3500	20	940
		10x12.2	1680	5300	18	940
	560	10x12.2	1680	5300	18	1120
	1000	10x12.2	1680	5300	18	2000

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE(mA/rms,100kHz)		ESR (mΩ,20℃ 100kHz)	LC (μA max/2min)
			Tx：125℃	Tx：105℃		
16(18.4)	47	6.3x5.8	500	1600	55	300
	82	6.3x7.7	764	2420	30	300
	100	6.3x7.7	764	2420	30	320
	150	8x10.4	1100	3490	25	480
	220	8x10.4	1100	3490	25	704
	270	8x10.4	1100	3490	25	864
	330	10x12.2	1560	5050	18	1056
	390	8x10.4	948	3000	25	1248
	470	10x10.2	980	3100	20	1504
		10x12.2	1600	5050	18	1504
	560	10x12.2	1600	5050	18	1792
	680	10x12.2	1600	5050	18	2176
	820	10x12.2	1600	5050	18	2624
20(23)	22	6.3x5.8	520	1650	55	300
	47	6.3x7.7	630	2000	50	300
	100	8x10.4	1050	3320	30	480
	150	10x12.2	1333	4220	25	600
25(28.75)	22	6.3x5.8	284	900	65	300
		6.3x7.7	568	1800	50	300
	47	6.3x5.8	410	1300	65	300
		6.3x7.7	568	1800	50	300
	68	6.3x7.7	568	1800	50	340
	100	8x10.4	1050	3320	30	500
	180	10x10.2	980	3100	35	900
	220	8x10.4	1050	3320	30	1100
	270	10x10.2	1050	3320	32	1350
	330	10x12.2	1106	3500	28	1650
35(40.25)	22	6.3x5.8	568	1800	55	300
	47	6.3x7.7	695	2200	50	329
	100	8x10.4	820	2600	35	700
	150	10x10.2	885	2800	35	1050
50(57.50)	22	6.3x7.7	632	2000	55	300
	47	8x10.4	695	2200	50	470
	100	10x12.2	790	2500	35	1000
63(72.45)	33	8x10.4	474	1500	45	416
	56	10x10.2	568	1800	40	706
	100	10x12.2	805	2550	35	1260
80(92.00)	47	10x10.2	711	2250	40	752
		10x12.2	790	2500	35	752

Jamicon Series：VH
Teapo Series：VH Long Life&High Temperature

- Endurance:125℃,4000hrs
- Recommended Applications:Smart home, servers, industrial equipment
- Corresponding product to RoHS
- AEC-Q200 qualified







Specifications


Item	Characteristics
Category Temperature Range	-55 ~ +125℃
Rated Voltage Range	16~80VDC
Rated Capacitance Range	22~ 1000μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	I≦0.03CV or 3(μA)whichever is greater,(After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tan δ) (120Hz ,20℃)	WV 16~80 tan δ 0.08
Endurance	After applying rated voltage for 4000 hours at 125℃,Stay back to 20℃ Temperature measurement, the capacitor shall meet the following requirement. Appearance: No significant damage Capacitance Change: Within ±20% of the initial value Dissipation Factor: Not more than 150% of the initial specified value Equivalent Series Resistance: Not more than 200% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃，the capacitors shall meet the requirement as Endurance.
Resistance to Soldering Heat＊	Capacitance Change: Within ±10% of the initial value Dissipation Factor: Not more than the initial specified value Equivalent Series Resistance: Not more than the initial specified value Leakage Current: Not more than the initial specified value


Diagram of Dimensions

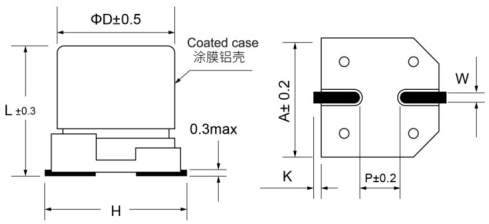

Marking : case with red printing

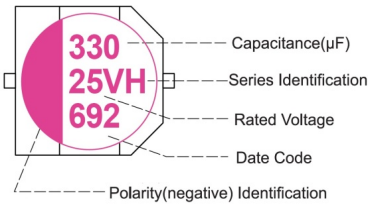





	SIZE	ΦD x L	A	H(Max)	W	P	K
Standard Version	GA3	8x6.7	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	GA8	8x12.2	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	HA4	10x7.7	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2

	SIZE	ΦD x L	A	H(Max)	W	P	K
Anti-Standard Version	GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	GA8	8x12.2	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2

Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.05	0.30	0.70	1.00

Jamicon Series：VH

Teapo Series：VH

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE(mA/rms ,125℃100kHz)	ESR (mΩ,20℃ 100kHz)	LC (μA max/2min)
16（18.4)	220	8x6.7	1500	30	105.6
	470	8x10.4	3400	17	225.6
	470	10x7.7	2200	32	225.6
	560	8x12.2	3800	16	268.8
	680	10x10.2	3200	19	326.4
	1000	10x12.2	4300	13	480
20（23)	150	8x6.7	1200	39	90
	330	8x10.4	3300	19	198
	330	10x7.7	2100	33	198
	470	8x12.2	3500	18	282
	560	10x10.2	3100	20	336
	680	10x12.2	4200	14	408
25（28.75)	100	8x6.7	1200	41	75
	220	8x10.4	3200	20	165
	220	10x7.7	2100	33	165
	270	8x12.2	3300	19	202.5
	330	10x10.2	3100	20	247.5
	470	10x12.2	4100	15	352.5
35（40.25)	82	8x6.7	1200	44	86.1
	150	8x10.4	3100	22	157.5
	180	10x7.7	2100	33	189
	220	8x12.2	3300	21	231
	270	10x10.2	3100	20	283.5
	330	10x12.2	3900	16	346.5
50（57.5)	39	8x6.7	1300	45	58.5
	82	8x10.4	2900	26	123
	68	10x7.7	1900	42	102
	100	8x12.2	2900	25	150
	100	10x10.2	3000	25	150
	150	10x12.2	3500	19	225
63（72.45)	22	8x6.7	1100	48	41.58
	39	8x10.4	2700	28	73.71
	39	10x7.7	1800	47	73.71
	56	8x12.2	2900	27	105.84
	68	10x10.2	2800	28	128.52
	100	10x12.2	3000	24	189
80（92)	27	8x10.4	1400	38	64.8
	39	8x12.2	1600	35	93.6
	47	10x10.2	1700	33	112.8
	68	10x12.2	2100	28	163.2

JAMICON Radial Type Conductive Polymer Aluminum Solid Capacitors TEAPO

Jamicon Series：FG
Teapo Series：FG Standard Series




- Endurance:105℃,2000hrs
- Recommended Applications:Lighting Equipment,Power Supply,Panel,Audio,UPS
- Corresponding product to RoHS


Specifications

Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	2.5~25VDC
Rated Capacitance Range	22~ 2200μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	I≦0.2CV or 300(μA)whichever is greater (After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tanδ) (120Hz ,20℃)	WV 2.5~10 12~25 tanδ 0.08 0.12
Endurance	After applying rated voltage for 2000 hours at 105℃,Stay back to 20℃ Temperature measurement, the capacitor shall meet the following requirement. Appearance: No significant damage Capacitance Change: Within ±20% of the initial value Dissipation Factor: Not more than 150% of the initial specified value Equivalent Series Resistance: Not more than 150% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃ ，the capacitors shall meet the requirement as Endurance.
Surge voltage test	After subjecting to 1000 cycles each consisting of charge with the surge voltage specified at normal temperature for 30 seconds through a protective resistor and discharge for 5 minutes 30 seconds,the capacitors shall meet the requirement as Endurance.

Diagram of Dimensions

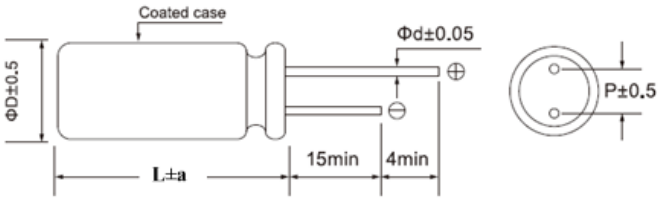

Marking : case with red printing

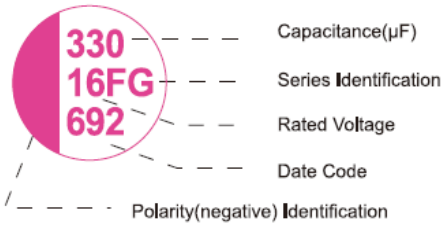

SIZE	ΦD x L	P	Φd	a
C07	5x7	2.0	0.5	1.5
C09	5x9	2.0	0.5	1.0
D07	5.5x7	2.5	0.5	1.0
D09	5.5x9	2.5	0.5	1.0
D11	5.5x11	2.5	0.5	1.0
E01	6.3x5.4	2.5	0.45	1.0
E06	6.3x6	2.5	0.5	1.5
E07	6.3x7	2.5	0.5	1.5
E08	6.3x8	2.5	0.5or0.6	1.0
E09	6.3x9	2.5	0.5	1.0

SIZE	ΦD x L	P	Φd	a
E11	6.3x11	2.5	0.5	1.0
G08	8x8	3.5	0.6	1.0
G09	8x9	3.5	0.6	1.0
G1B	8x11.5	3.5	0.6	1.0
G12	8x12	3.5	0.6	1.0
G15	8x15	3.5	0.6	1.5
H1A	10x10.5	5.0	0.6	1.0
H1C	10x12.5	5.0	0.6	1.0
H13	10x13	5.0	0.6	1.0
H16	10x16	5.0	0.6	1.0

Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.05	0.30	0.70	1.00

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：FG

Teapo Series：FG

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃ 100KHz)	ESR (mΩ,20℃ 100KHz)
2.5（2.88）	560	6.3x6	4000	10
		6.3x8	4500	10
	820	6.3x8	4500	10
		8x11.5	5600	7
	1500	10x12.5	5600	7
	2200	10x12.5	5600	7
4（4.6）	560	6.3x8	4500	10
	680	6.3x8	4500	10
		8x11.5	5600	7
	820	6.3x9	4200	8
		10x12.5	5600	7
	1000	8x11.5	5600	7
		10x12.5	5600	7
	1500	8x11.5	5600	7
	2200	10x12.5	5600	7
6.3（7.25）	47	6.3x5.4	1810	30
	100	6.3x5.4	1810	40
	180	6.3x5.4	1810	30
	220	5x7	3500	11
		6.3x5.4	1810	30
		6.3x6	3160	15
	270	5x7	3500	11
		6.3x7	3500	11
	330	5x7	3500	11
		6.3x5.4	1810	30
		6.3x6	3390	22
	390	5x9	3500	11
		6.3x9	3500	8
	450	5x9	3500	11
		6.3x6	3390	22
	470	5x9	3190	28
		6.3x6	3390	22
		6.3x8	3800	10
		8x8	4200	8
	560	6.3x8	4000	10
		8x8	4800	12
	680	6.3x9	3500	8
		8x11.5	5600	7
	820	6.3x9	3500	8
		8x11.5	5600	7
		10x10.5	5050	8
		10x12.5	5600	7
	1000	8x8	4770	10
		8x11.5	5600	7
	1200	8x11.5	5600	7
		10x10.5	5050	8
	1500	8x11.5	5600	7
		10x10.5	5050	8
		10x12.5	5600	7
	2200	10x12.5	5600	7
6.8（7.82）	180	5x7	2300	20
	220	5x7	2500	20
	270	5.5x7	2500	20
	330	5x9	3100	15
	390	5x9	3100	15
	450	6.3x6	3100	15
	680	6.3x9	3500	11
	820	6.3x9	3500	11
	1000	6.3x11	4200	10
7.5（8.62）	270	5x9	2690	15

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃ 100KHz)	ESR (mΩ,20℃ 100KHz)
7.5（8.62）	390	5.5x9	3100	15
	470	5.5x9	3100	15
	500	5.5x9	3100	12
	680	6.3x9	3500	12
10（11.5）	68	6.3x5.4	1810	30
	100	5x7	3500	11
		6.3x5.4	2320	27
	150	6.3x5.4	2200	30
	180	6.3x8	2820	25
	220	6.3x8	2820	25
	270	6.3x8	2820	25
	330	6.3x8	2820	25
		8x8	3500	11
	470	6.3x9	2820	25
		8x11.5	5600	8
		10x10.5	5050	8
	560	8x11.5	5600	8
		10x12.5	6100	8
	680	8x11.5	5600	8
		10x12.5	6100	8
	820	8x11.5	5600	8
		10x12.5	6100	8
	1200	10x12.5	6100	8
	1500	10x12.5	6100	8
16(18.4)	22	5x7	2200	30
		6.3x5.4	2200	30
	33	6.3x5.4	2490	24
	47	6.3x5.4	1650	35
		6.3x6	2610	25
	68	6.3x5.4	1650	35
	100	6.3x5.4	2490	24
		6.3x8	2820	24
	150	6.3x8	2820	25
		8x8	3150	22
	180	6.3x8	2820	25
		8x8	3500	16
	270	6.3x9	3100	20
		8x8	3800	15
		8x11.5	5000	11
		10x10.5	5050	10
	330	5.5x11	2820	25
		6.3x9	3100	20
		8x11.5	5000	11
		10x10.5	5050	14
		10x12.5	6100	10
	470	8x11.5	5000	11
		10x10.5	5050	14
		10x12.5	6100	10
	560	8x11.5	5000	11
		10x10.5	5050	11
		10x12.5	6100	10
	680	8x11.5	5000	11
		10x12.5	6100	10
	820	8x9	3500	20
		8x12	5000	10
		10x12.5	5000	10
	1000	8x15	5000	10
		10x12.5	5500	11
25（28.75）	33	6.3x8	1650	35
	47	6.3x10.5	1980	35
	68	8x8	2980	35

JAMICON Radial Type Conductive Polymer Aluminum Solid Capacitors TEAPO

Jamicon Series：FR
Teapo Series：FR High Ripple & low ESR Series




- Endurance:105℃,2000hrs
- Recommended Applications:Motherboard,Server
- Corresponding product to RoHS


Specifications

Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	2.5~6.3VDC
Rated Capacitance Range	270~ 2700 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	I≦0.2CV or 300(μA)whichever is greater (After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tan δ) (120Hz ,20℃)	WV 2.5~6.3 tan δ 0.10
Endurance	After applying rated voltage for 2000 hours at 105℃,Stay back to 20℃ Temperature measurement, the capacitor shall meet the following requirement. Appearance: No significant damage Capacitance Change: Within ±20% of the initial value Dissipation Factor: Not more than 150% of the initial specified value Equivalent Series Resistance: Not more than 150% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃ ，the capacitors shall meet the requirement as Endurance.
Surge voltage test	After subjecting to 1000 cycles each consisting of charge with the surge voltage specified at normal temperature for 30 seconds through a protective resistor and discharge for 5 minutes 30 seconds,the capacitors shall meet the requirement as Endurance.

Diagram of Dimensions

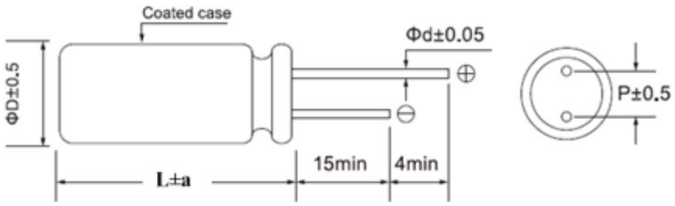

Marking : case with red printing

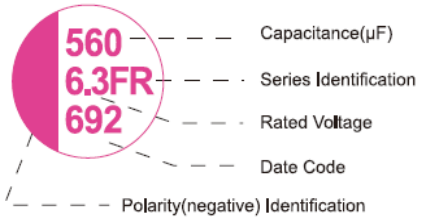

SIZE	ΦD X L	P	Φd	a
E08	6.3X8	2.5	0.5or0.6	1.0
E11	6.3x11	2.5	0.5	1.0
G08	8X8	3.5	0.6	1.0
G1B	8X11.5	3.5	0.6	1.0
H1C	10X12.5	5.0	0.6	1.0

Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.05	0.30	0.70	1.00

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：FR

Teapo Series：FR

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃ 100kHz)	ESR (mΩ,20℃ 100kHz)
2.5（2.88）	560	6.3x8	5000	7
		8x8	6100	7
	680	8x8	6100	7
		8x11.5	6100	7
	820	6.3x8	5000	7
		8x8	6100	7
		8x11.5	6100	7
	1000	8x8	6100	7
		8x11.5	6100	7
	1500	8x11.5	6100	7
	2700	10x12.5	5600	8
4（4.6）	560	6.3x8	5000	7
		8x8	6100	7
		8x11.5	6100	7
	680	8x8	6100	7
		8x11.5	6100	7
	1000	8x8	6100	7
		8x11.5	6100	7
		10x12.5	6100	7

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃ 100kHz)	ESR (mΩ,20℃ 100kHz)
4（4.6）	1200	8x8	6100	7
	1500	8x11.5	6100	7
	1800	10x12.5	6500	9
6.3（7.25）	270	6.3x8	4700	8
	330	6.3x8	4700	8
	470	6.3x8	4700	8
		8x8	5700	8
	560	6.3x8	4700	8
		8x8	5700	8
	680	8x8	5700	8
		8x11.5	5700	7
	820	8x8	5700	8
		8x11.5	5700	7
	1000	8x8	5700	8
		8x11.5	5700	7
		10x12.5	6100	7
	1500	8x11.5	5700	7
		10x12.5	6100	7

JAMICON Radial Type Conductive Polymer Aluminum Solid Capacitors TEAPO

Jamicon Series：FF
Teapo Series：FF Large capacitance Series




- Endurance:105℃,2000hrs
- Recommended Applications: Power Supply,Charger,Lighting Equipment,Network
- Corresponding product to RoHS


Specifications

Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	16~100VDC
Rated Capacitance Range	10~ 1000μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	I≦0.2CV or 300(μA)whichever is greater(After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tan δ) (120Hz ,20℃)	WV 6.3~100 tan δ 0.12
Endurance	After applying rated voltage for 2000 hours at 105℃, Stay back to 20℃ Temperature measurement,the capacitor shall meet the following requirement. Appearance: No significant damage Capacitance Change: Within ±20% of the initial value Dissipation Factor: Not more than 150% of the initial specified value Equivalent Series Resistance: Not more than 150% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃，the capacitors shall meet the requirement as Endurance.
Surge voltage test	After subjecting to 1000 cycles each consisting of charge with the surge voltage specified at normal temperature for 30 seconds through a protective resistor and discharge for 5 minutes 30 seconds,the capacitors shall meet the requirement as Endurance.

Diagram of Dimensions

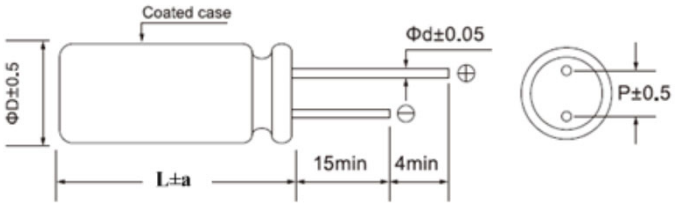

Marking : case with red printing

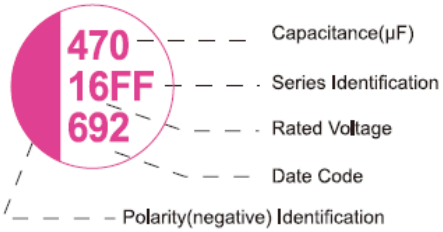

SIZE	ΦD x L	P	Φd	a
E01	6.3x5.4	2.5	0.45	1.0
E06	6.3x6	2.5	0.5	1.5
E08	6.3x8	2.5	0.5or0.6	1.0
E11	6.3x11	2.5	0.5	1.0
G08	8x8	3.5	0.6	1.0
G1B	8x11.5	3.5	0.6	1.0
H1A	10x10.5	5.0	0.6	1.0
H1C	10x12.5	5.0	0.6	1.0
H13	10x13	5.0	0.6	1.0
H16	10x16	5.0	0.6	1.0

Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.05	0.30	0.70	1.00

Jamicon Series：FF

Teapo Series：FF

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃ 100kHz)	ESR (mΩ,20℃ 100kHz)
16(18.4)	470	8x11.5	4000	12
	560	8x11.5	4000	12
	820	10x12.5	4000	11
	100	10x12.5	4200	11
25(28.75)	22	6.3x5.4	1200	60
	47	6.3x5.4	1200	60
		6.3x8	1200	35
	68	6.3x6	1200	35
		8x8	1500	30
	100	6.3x8	1500	35
		8x8	1500	30
	120	6.3x8	1500	35
		8x8	1500	30
	150	8x8	1600	28
	220	6.3x11	2000	20
		8x8	2280	28
	270	8x11.5	2800	28
	330	8x11.5	2800	25
		10x10.5	2800	25
	470	10x12.5	3050	25
	560	10x12.5	3050	25
	680	10x13	3500	20
	820	10x16	3500	20
	1000	10x16	3500	20
32(36.8)	22	6.3x8	990	60
	47	6.3x8	990	60
	100	8x8	1200	50
	150	8x8	1500	50
35(40.25)	10	6.3x8	990	60
	22	6.3x8	990	60
	33	6.3x6	990	70
		6.3x8	990	60
	47	6.3x8	990	60
	68	6.3x8	990	60
	100	6.3x8	1200	40
		8x8	2000	30
		8x11.5	2300	25
	150	8x11.5	2300	25

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃ 100kHz)	ESR (mΩ,20℃ 100kHz)
35(40.25)	220	8x11.5	2400	25
		10x10.5	2400	22
	270	10x12.5	2500	25
	330	10x12.5	2500	25
50(57.5)	33	8x8	1300	48
	47	8x8	1300	48
		8x11.5	1500	45
	68	8x11.5	1500	45
	100	10x10.5	2200	40
		10x12.5	3000	30
	120	10x12.5	3000	30
63(72.45)	10	6.3x8	900	80
	33	8x8	1100	65
	47	8x8	1100	65
	56	10x12.5	1500	55
	100	10x12.5	2000	40
80(92)	10	6.3x8	900	90
	47	10x12.5	1300	70
100(115)	22	10x10.5	1200	100

Jamicon Series：FL
Teapo Series：FL Special for Charger series




■ Endurance:105℃,2000hrs
■ Recommended Applications:Special charger series
■ Corresponding product to RoHS


■ Specifications

Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	6.3~16VDC
Rated Capacitance Range	22~ 2200μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	I≦0.2CV or 300(μA)whichever is greater (After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tanδ) (120Hz ,20℃)	WV: 6.3~10 / 12~16 tanδ: 0.08 / 0.12
Endurance	After applying rated voltage for 2000 hours at 105℃,Stay back to 20℃ Temperature measurement, the capacitor shall meet the following requirement. Appearance: No significant damage Capacitance Change: Within ±20% of the initial value Dissipation Factor: Not more than 150% of the initial specified value Equivalent Series Resistance: Not more than 150% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃ ，the capacitors shall meet the requirement as Endurance.
Surge voltage test	After subjecting to 1000 cycles each consisting of charge with the surge voltage specified at normal temperature for 30 seconds through a protective resistor and discharge for 5 minutes 30 seconds,the capacitors shall meet the requirement as Endurance

■ Diagram of Dimensions

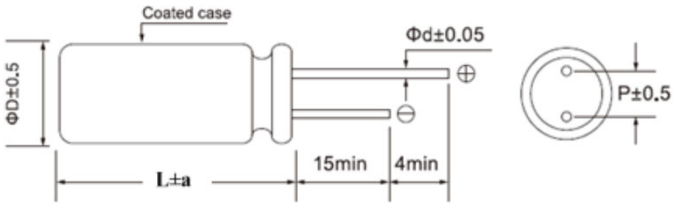

■ Marking : case with red printing

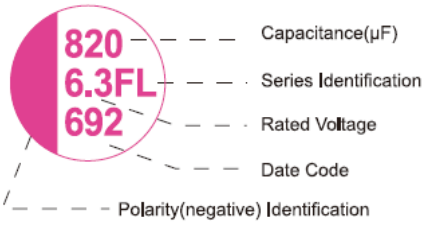

SIZE	ΦD x L	P	Φd	a
C07	5x7	2.0	0.5	1.5
C09	5x9	2.0	0.5	1.0
D07	5.5x7	2.5	0.5	1.0
D09	5.5x9	2.5	0.5	1.0
D11	5.5x11	2.5	0.5	1.0
E01	6.3x5.4	2.5	0.45	1.0
E06	6.3x6	2.5	0.5	1.5

SIZE	ΦDx L	P	Φd	a
E08	6.3x8	2.5	0.5or0.6	1.0
E09	6.3x9	2.5	0.5	1.0
E11	6.3x11	2.5	0.5	1.0
G08	8x8	3.5	0.6	1.0
G1B	8x11.5	3.5	0.6	1.0
H1A	10x10.5	5.0	0.6	1.0
H1C	10x12.5	5.0	0.6	1.0

■ Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.05	0.30	0.70	1.00

Jamicon Series：FL

Teapo Series：FL

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃ 100kHz)	ESR (mΩ,20℃ 100kHz)
6.3（7.25）	47	6.3x5.4	1810	30
	100	6.3x5.4	1810	40
	180	6.3x5.4	1810	30
	220	5x7	3500	11
		6.3x5.4	1810	30
		6.3x6	3160	15
	270	5x7	3500	11
	330	5x7	3500	11
		6.3x5.4	1810	30
		6.3x6	3390	22
	390	5x9	3500	11
		6.3x9	3500	8
	450	5x9	3500	11
		6.3x6	3390	22
	470	5.5x9	3190	28
		6.3x6	3390	22
		6.3x8	3800	10
		8x8	4200	8
	560	6.3x8	4000	10
		8x8	4800	12
	680	6.3x9	3500	8
		8x11.5	5600	7
	820	6.3x9	3500	8
		8x11.5	5600	7
		10x10.5	5050	8
		10x12.5	5600	7
	1000	8x8	4770	14
		8x11.5	5600	7
	1200	8x11.5	5600	7
		10x10.5	5050	8
	1500	8x11.5	5600	7
		10x10.5	5050	8
		10x12.5	5600	7
	2200	10x12.5	5600	7
6.8（7.82）	180	5x7	2300	20
	220	5x7	2500	20
	270	5.5x7	2500	20
	330	5x9	3100	15
	390	5x9	3100	15
	680	6.3x9	3500	11
	820	6.3x9	3500	11
	1000	6.3x11	4200	10

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃ 100kHz)	ESR (mΩ,20℃ 100kHz)
7.5（8.62）	270	5x9	2690	15
	390	5.5x9	3100	15
	470	5.5x9	3100	15
	500	5.5x9	3100	12
	680	6.3x9	3500	12
10（11.5）	68	6.3x5.4	1810	30
	100	5x7	3500	11
		6.3x5.4	2320	27
	150	6.3x5.4	2200	30
	180	6.3x8	2820	25
	220	6.3x8	2820	25
	270	6.3x8	2820	25
	330	6.3x8	2820	25
		8x8	3500	11
	470	6.3x9	2820	25
		8x11.5	5600	8
		10x10.5	5050	8
	560	8x11.5	5600	8
		10x12.5	6100	8
	680	8x11.5	5600	8
		10x12.5	6100	8
	820	8x11.5	5600	8
		10x12.5	6100	8
	1200	10x12.5	6100	8
	1500	10x12.5	6100	8
16(18.4)	22	5x7	2200	30
		6.3x5.4	2200	30
	33	6.3x5.4	2490	24
	47	6.3x5.4	1650	35
		6.3x6	2610	25
	68	6.3x5.4	1650	35
	100	6.3x5.4	2490	24
		6.3x8	2820	24
	150	6.3x8	2820	25
		8x8	3150	22
	180	6.3x8	2820	25
		8x8	3500	16
	270	6.3x9	3100	20
		8x8	3800	15
		8x11.5	5000	11
		10x10.5	5050	14
	330	5.5x11	2820	25

JAMICON Radial Type Conductive Polymer Aluminum Solid Capacitors TEAPO

Jamicon Series：FS
Teapo Series：FS

Large capacitance & Long Life & High Voltage Series




- Endurance: 105℃,5000hrs
- Recommended Applications:Smart Meters,Inverter
- Corresponding product to RoHS


Specifications

Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	20~80VDC
Rated Capacitance Range	22~680μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	I≦0.2CV or 300(μA)whichever is greater(After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tan δ) (120Hz ,20℃)	WV: 20~80 tan δ: 0.12
Endurance	After applying rated voltage for 5000 hours at 105℃, Stay back to 20℃ Temperature measurement,the capacitor shall meet the following requirement. Appearance: No significant damage Capacitance Change: Within ±20% of the initial value Dissipation Factor: Not more than 150% of the initial specified value Equivalent Series Resistance: Not more than 150% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃ ，the capacitors shall meet the requirement as Endurance.
Surge voltage test	After subjecting to 1000 cycles each consisting of charge with the surge voltage specified at normal temperature for 30 seconds through a protective resistor and discharge for 5 minutes 30 seconds,the capacitors shall meet the requirement as Endurance

Diagram of Dimensions

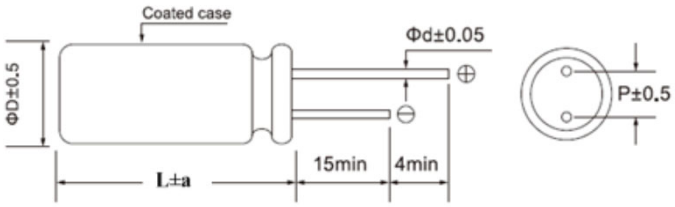

Marking : case with red printing

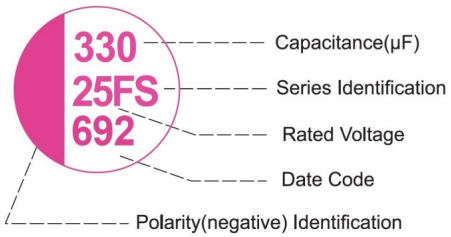

尺寸代码	ΦD x L	P	Φd	a
G08	8x8	3.5	0.6	1.0
G1B	8x11.5	3.5	0.6	1.0
G15	8x15	3.5	0.6	1.5
H1B	10x11.5	5.0	0.6	1.0
H1C	10x12.5	5.0	0.6	1.0
H16	10x16	5.0	0.6	1.0
H20	10x20	5.0	0.6	1.5

Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.05	0.30	0.70	1.00

Jamicon Series：FS

Teapo Series：FS

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃ 100KHz)	ESR (mΩ,20℃ 100KHz)
20(23)	390	8x11.5	1760	25
	680	10x11.5	2800	25
25(28.75)	150	8x11.5	1760	25
	220	8x11.5	1760	25
	270	8x11.5	1760	25
	330	10x12.5	2050	25
	390	10x12.5	2050	25
	470	10x12.5	2050	25
35(40.25)	39	8x8	1500	50
	56	8x8	1500	50
	100	8x8	1500	50
		8x11.5	1760	35
	150	8x11.5	1760	35
	220	8x11.5	1760	35
	270	10x12.5	2050	25

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃ 100KHz)	ESR (mΩ,20℃ 100KHz)
50(57.5)	47	8x11.5	1760	38
	56	8x11.5	1760	38
	82	10x12.5	2050	35
	100	10x12.5	2500	35
	330	10x20	3800	25
63（72.45）	47	8x8	1100	65
	100	8x15	1700	55
		10x12.5	2000	45
	150	10x16	2200	35
80（92）	22	8x8	900	60
	56	10x12.5	1800	45
	100	10x16	2000	38
	150	10x20	3500	32

JAMICON Radial Type Conductive Polymer Aluminum Solid Capacitors TEAPO

Jamicon Series：FP
Teapo Series：FP 8mm height & Low ESR Series




■ Endurance:105℃,3000hrs
■ Recommended Applications:Server,Power Supply
■ Corresponding product to RoHS

■Dimensions,Rated Ripple Current,Equivalent Series Resistance


Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	2.5~25VDC
Rated Capacitance Range	10~ 1200μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	I≦0.2CV or 300(μA)whichever is greater (After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tan δ) (120Hz ,20℃)	WV: 2.5~10 / 16~25 tan δ: 0.08 / 0.12
Endurance	After applying rated voltage for 3000 hours at 105℃,Stay back to 20℃ Temperature measurement, the capacitor shall meet the following requirement. Appearance: No significant damage Capacitance Change: Within ±20% of the initial value Dissipation Factor: Not more than 150% of the initial specified value Equivalent Series Resistance: Not more than 150% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃ ，the capacitors shall meet the requirement as Endurance.
Surge voltage test	After subjecting to 1000 cycles each consisting of charge with the surge voltage specified at normal temperature for 30 seconds through a protective resistor and discharge for 5 minutes 30 seconds,the capacitors shall meet the requirement as Endurance.

■ Diagram of Dimensions

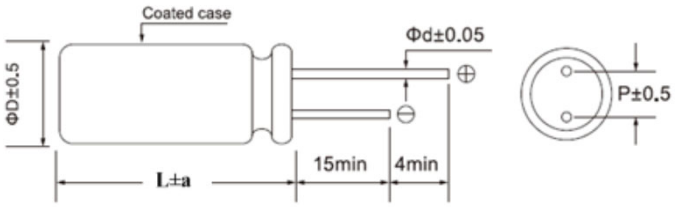

SIZE	ΦD x L	P	Φd	a
E08	6.3x8	2.5	0.6	1.0
G08	8x8	3.5	0.6	1.0

■ Marking : case with red printing

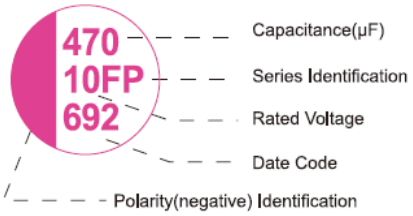

■ Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.05	0.30	0.70	1.00

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：FP

Teapo Series：FP

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃ 100kHz)	ESR (mΩ,20℃ 100kHz)
2.5（2.88）	560	6.3x8	4200	8
		8x8	5600	8
	820	6.3x8	4200	8
		8x8	5600	8
	1200	8x8	5600	8
6.3（7.25）	470	6.3x8	4200	8
		8x8	5600	8
	560	6.3x8	4200	8
		8x8	5600	8
	820	8x8	5600	8
10（11.5）	220	6.3x8	2820	25
		8x8	3500	11
	270	6.3x8	2820	25
	330	6.3x8	2820	25
		8x8	3500	11

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃ 100kHz)	ESR (mΩ,20℃ 100kHz)
10（11.5）	470	8x8	3500	11
	560	8x8	5000	10
16(18.4)	100	6.3x8	2820	25
	150	6.3x8	2820	25
	220	6.3x8	2820	25
	270	8x8	3500	11
	330	8x8	3500	11
	470	8x8	4200	11
	560	8x8	4200	11
25（28.75）	10	6.3x8	1200	40
	22	6.3x8	1650	35
	33	6.3x8	1650	35
	56	8x8	1980	35
	68	8x8	1980	35

JAMICON Radial Type Conductive Polymer Aluminum Solid Capacitors TEAPO

Jamicon Series：FH
Teapo Series：FH Long life & low ESR Series




- Endurance:105℃,5000hrs
- Recommended Applications: Motherboard,Server,Printer
- Corresponding product to RoHS


Specifications

Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	2.5~16VDC
Rated Capacitance Range	100~ 1800μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	I≦0.2CV or 300(μA)whichever is greater (After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tanδ) (120Hz ,20℃)	WV 2.5~16 tanδ 0.12
Endurance	After applying rated voltage for 5000 hours at 105℃,Stay back to 20℃ Temperature measurement, the capacitor shall meet the following requirement. Appearance: No significant damage Capacitance Change: Within ±20% of the initial value Dissipation Factor: Not more than 150% of the initial specified value Equivalent Series Resistance: Not more than 150% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃ ，the capacitors shall meet the requirement as Endurance.
Surge voltage test	After subjecting to 1000 cycles each consisting of charge with the surge voltage specified at normal temperature for 30 seconds through a protective resistor and discharge for 5 minutes 30 seconds,the capacitors shall meet the requirement as Endurance.

Diagram of Dimensions

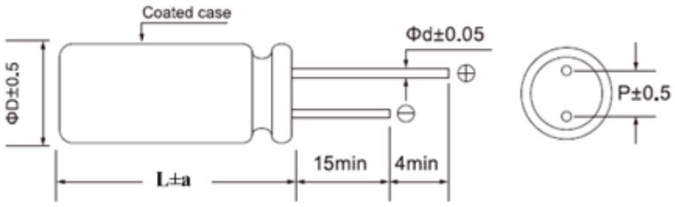

Marking : case with red printing

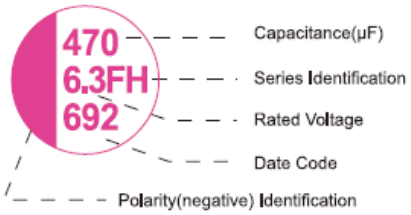

SIZE	ΦD x L	P	Φd	a
E01	6.3x5.4	2.5	0.45	1.0
E08	6.3x8	2.5	0.5or0.6	1.0
G08	8x8	3.5	0.6	1.0
G1B	8x11.5	3.5	0.6	1.0
G15	8x15	3.5	0.6	1.5
H1C	10x12.5	5.0	0.6	1.0

Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.05	0.30	0.70	1.00

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：FH
Teapo Series：FH

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃ 100kHz)	ESR (mΩ,20℃ 100kHz)
2.5(2.87)	330	6.3x8	3500	8
	560	6.3x5.4	3000	16
		6.3x8	3500	7
	820	6.3x8	3500	7
		8x8	5000	7
4(4.6)	560	6.3x8	3500	8
		8x8	6100	8
	680	8x11.5	6100	7
	1500	10x12.5	6100	7
6.3(7.25)	220	6.3x5.4	1700	45
	330	6.3x8	3500	10
	470	6.3x8	3500	10
		8x8	3500	10
	560	6.3x8	3500	10
	820	8x11.5	3500	8
	1200	8x11.5	3500	8
	1500	10x12.5	4500	8
	1800	10x12.5	5000	8
10(11.5)	220	6.3x8	2500	15
	270	6.3x8	2800	15

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃ 100kHz)	ESR (mΩ,20℃ 100kHz)
10(11.5)	330	8x11.5	3500	10
	560	8x11.5	5000	10
	680	8x11.5	5000	10
16(18.4)	100	6.3x5.4	2490	24
		6.3x8	2490	30
	180	6.3x8	2490	25
	220	8x11.5	4500	12
	270	6.3x8	3500	15
		8x8	3500	15
		8x11.5	4500	11
	330	8x8	3500	15
	470	8x11.5	3500	15
		10x12.5	4700	12
	560	8x11.5	4500	12
		10x12.5	5000	10
	680	8x15	5500	11
	820	10x12.5	4500	11
	1000	10x12.5	4500	11

Jamicon Series：FJ
Teapo Series：FJ High Ripple & Low ESR Series




- Endurance:105℃,5000hrs
- Recommended Applications:Server
- Corresponding product to RoHS


Specifications

Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	2.5~35VDC
Rated Capacitance Range	22~ 2700μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	I≦0.2CV or 300(μA)whichever is greater,(After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tanδ) (120Hz ,20℃)	WV 2.5~35 tanδ 0.10
Endurance	After applying rated voltage for 5000 hours at 105℃,Stay back to 20℃ Temperature measurement, the capacitor shall meet the following requirement. Appearance: No significant damage Capacitance Change: Within ±20% of the initial value Dissipation Factor: Not more than 150% of the initial specified value Equivalent Series Resistance: Not more than 150% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃ ，the capacitors shall meet the requirement as Endurance.
Surge voltage test	After subjecting to 1000 cycles each consisting of charge with the surge voltage specified at normal temperature for 30 seconds through a protective resistor and discharge for 5 minutes 30 seconds,the capacitors shall meet the requirement as Endurance.

Diagram of Dimensions

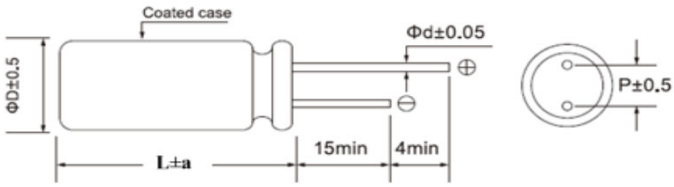

Marking : case with red printing

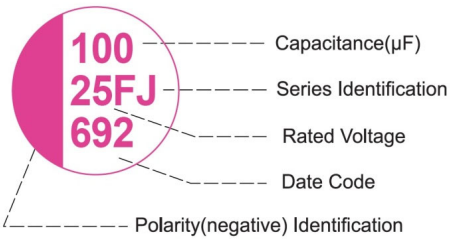

SIZE	ΦD x L	P	Φd	a
C07	5x7	2.0	0.5	1.5
C09	5x9	2.0	0.5	1.0
E01	6.3x5.4	2.5	0.45	1.0
E08	6.3x8	2.5	0.6	1.0
G08	8x8	3.5	0.6	1.0
G12	8x12	3.5	0.6	1.0
H1C	10x12.5	5.0	0.6	1.0

Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.05	0.30	0.70	1.00

Jamicon Series：FJ

Teapo Series：FJ

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃ 100KHz)	ESR (mΩ,20℃ 100KHz)
2.5（2.88）	100	5x7	4180	7
	330	5x7	4180	7
	470	5x9	4180	7
	560	5x9	4180	7
		8x8	4700	8
	820	8x8	6100	7
		8x12	6100	7
	1000	8x8	6100	7
	2700	10x12.5	5560	10
4.0(4.6)	560	6.3x8	5600	7
		8x8	6100	7
		8x12	6100	7
	680	8x12	6100	7
	820	10x12.5	6640	7
6.3（7.25）	470	6.3x8	5600	7
		8x8	5700	8
		8x12	5700	8
	560	6.3x8	5600	7
		8x8	6100	7
	680	10x12.5	6640	7
	1500	10x12.5	5560	10
16(18.4)	100	6.3x8	4680	10
	150	6.3x5.4	2490	24
	180	8x8	5000	10
		8x12	4360	16
	270	6.3x8	5080	10
		8x8	5000	10
		8x12	5000	11
	470	8x8	5400	8
		10x12.5	6100	10
	560	8x12	4950	14
	1000	10x12.5	5400	12

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃ 100KHz)	ESR (mΩ,20℃ 100KHz)
20（23）	120	6.3x5.4	3200	25
	390	8x12	4970	14
	560	10x12.5	5600	12
25（28.75）	56	6.3x5.4	2800	30
	180	8x12	4650	16
	220	8x12	4650	16
	330	10x12.5	5000	14
	390	10x12.5	5000	14
35（40.25）	22	6.3x5.4	2600	35
	82	8x12	4000	20
	120	10x12.5	4400	18

JAMICON Radial Type Conductive Polymer Aluminum Solid Capacitors TEAPO

Jamicon Series：FC
Teapo Series：FC Long Life 15000hrs Series




■ Endurance: 105℃,15000hrs
■ Recommended Applications:Server,Industrial computer,Smart Meters,Charger
■ Corresponding product to RoHS


■ Specifications

Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	6.3~80VDC
Rated Capacitance Range	22~2200μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	I≦0.2CV or 300(μA)whichever is greater(After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tan δ) (120Hz ,20℃)	WV 6.3~80 tan δ 0.12
Endurance	After applying rated voltage for 15000 hours at 105℃, Stay back to 20℃ Temperature measurement,the capacitor shall meet the following requirement. Appearance: No significant damage Capacitance Change: Within ±20% of the initial value Dissipation Factor: Not more than 150% of the initial specified value Equivalent Series Resistance: Not more than 150% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃ ，the capacitors shall meet the requirement as Endurance.
Surge voltage test	After subjecting to 1000 cycles each consisting of charge with the surge voltage specified at normal temperature for 30 s through a protective resistor and discharge for 5 minutes 30 seconds,the capacitors shall meet the requirement as Endurar

■ Diagram of Dimensions

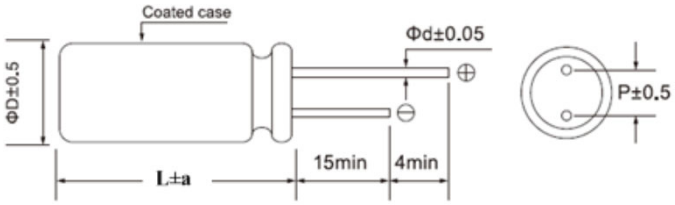

■ Marking : case with red printing

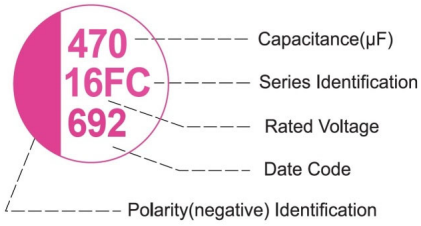

尺寸代码	ΦD x L	P	Φd	a
C07	5x7	2.0	0.5	1.5
D09	5.5x9	2.5	0.5	1.0
E01	6.3x5.4	2.5	0.45	1.0
E06	6.3x6	2.5	0.5	1.5
E08	6.3x8	2.5	0.6	1.0
E11	6.3x11	2.5	0.5	1.0
G08	8x8	3.5	0.6	1.0
G1B	8x11.5	3.5	0.6	1.0
G15	8x15	3.5	0.6	1.5
H1A	10x10.5	5.0	0.6	1.0
H1C	10x12.5	5.0	0.6	1.0
H16	10x16	5.0	0.6	1.0

■ Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.05	0.30	0.70	1.00

Jamicon Series：FC
Teapo Series：FC

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃ 100KHz)	ESR (mΩ,20℃ 100KHz)
6.3(7.25)	270	5x7	3500	15
		6.3x5.4	3000	17
	560	6.3x8	4700	10
	1000	6.3x11	5100	10
	820	8x8	4700	10
	2200	10x12.5	6200	9
10（11.5）	220	5x7	2800	18
	330	6.3x8	4500	13
	680	8x11.5	5600	10
	1500	10x12.5	6100	9
16（18.4）	100	5x7	2600	25
	180	6.3x6	2800	20
	220	5.5x9	2400	40
	470	8x11.5	5400	11
	1000	10x12.5	5600	10
25（28.75）	100	6.3x8	3000	25
	220	6.3x11	3800	22
	330	8x11.5	4800	15
	680	8x15	5200	12
	1000	10x16	6000	10

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃ 100KHz)	ESR (mΩ,20℃ 100KHz)
35（40.25）	100	6.3x8	2000	30
		8x8	3500	22
	220	8x11.5	3800	20
	330	10x12.5	4000	17
	680	10x16	4500	16
50（57.5）	22	6.3x8	1500	45
	47	8x11.5	2500	42
	68	8x11.5	2500	42
		10x12.5	2800	40
	100	10x12.5	2800	38
	220	10x16	3200	35
63（72.45）	22	6.3x8	1100	48
	47	8x8	1500	43
	82	10x10.5	1600	40
	100	10x12.5	2200	30
	180	10x16	2800	26
80（92）	47	10x12.5	1800	40
	100	10x16	2100	40

Jamicon Series：FB
Teapo Series：FB Long Life 20000hrs Series




■ Endurance: 105℃,20000hrs
■ Recommended Applications:Network,Home Appliances,Printer
■ Corresponding product to RoHS

■ Specifications


Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	6.3~80VDC
Rated Capacitance Range	10~2200 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	I≦0.2CV or 300(μA)whichever is greater(After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tan δ) (120Hz ,20℃)	WV 6.3~80 tan δ 0.12
Endurance	After applying rated voltage for 20000 hours at 105℃, Stay back to 20℃ Temperature measurement, the capacitor shall meet the following requirement. Appearance: No significant damage Capacitance Change: Within ±20% of the initial value Dissipation Factor: Not more than 150% of the initial specified value Equivalent Series Resistance: Not more than 150% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	after subjecting 90 to 95% RH for 1000 hours at 60℃ ，the capacitors shall meet the requirement as Endurance.
Surge voltage test	After subjecting to 1000 cycles each consisting of charge with the surge voltage specified at normal temperature for 30 seconds through a protective resistor and discharge for 5 minutes 30 seconds,the capacitors shall meet the requirement as Endurance.

■ Diagram of Dimensions

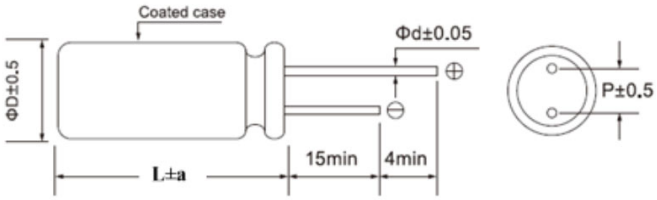

SIZE	ΦD x L	P	Φd	a
C07	5x7	2.0	0.5	1.5
E01	6.3x5.4	2.5	0.45	1.0
E08	6.3x8	2.5	0.6	1.0
E09	6.3x9	2.5	0.5	1.0
G08	8x8	3.5	0.6	1.0
G1B	8x11.5	3.5	0.6	1.0
G15	8x15	3.5	0.6	1.0
G16	8x16	3.5	0.6	1.0
G20	8x20	3.5	0.6	1.0
H1A	10x10.5	5.0	0.6	1.0
H1C	10x12.5	5.0	0.6	1.0
H16	10x16	5.0	0.6	1.0
H20	10x20	5.0	0.6	1.0

■ Marking : case with red printing

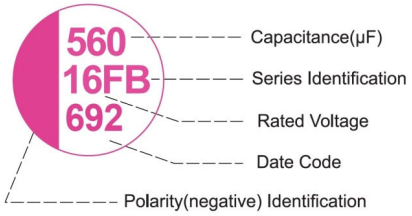

■ Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.05	0.30	0.70	1.00

Jamicon Series：FB

Teapo Series：FB

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃ 100KHz)	ESR (mΩ,20℃ 100KHz)
6.3(7.25)	100	5x7	3500	15
	220	6.3x5.4	3000	17
	560	6.3x8	4700	10
	680	8x8	4700	10
	1000	8x11.5	5600	9
	1500	10x10.5	5000	10
	2200	10x12.5	6100	8
10（11.5）	100	6.3x5.4	2800	18
	330	6.3x8	4500	15
	560	8x8	4500	13
	1000	8x11.5	5500	10
	1200	10x12.5	6000	9
16（18.4）	100	6.3x5.4	2490	20
	150	6.3x5.4	2490	20
	220	6.3x8	4200	15
	330	6.3x9	4500	13
	470	8x8	4500	12
		8x11.5	5400	11
	560	8x11.5	5400	11
	820	8x16	6500	8
		10x12.5	5600	10
	1000	8x15	6000	10
		8x20	7000	8
		10x12.5	5600	10
	1200	8x20	7000	8
	1500	10x16	6500	9
		10x20	7800	8
	2200	10x20	7800	8

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃ 100KHz)	ESR (mΩ,20℃ 100KHz)
25（28.75）	47	6.3x5.4	2200	35
	100	6.3x8	2780	28
	220	8x11.5	4650	16
	330	8x11.5	4800	15
		10x12.5	5000	14
	470	10x12.5	5200	13
	820	10x16	6000	10
35（40.25）	47	6.3x8	2000	30
	100	8x8	3500	25
	220	8x11.5	3800	20
	270	10x12.5	4000	18
50（57.5）	22	6.3x8	1500	50
	47	8x11.5	2500	45
	100	10x12.5	2800	40
63（72.45）	10	6.3x8	1000	50
	33	8x8	1500	45
	82	10x12.5	2200	30
80（92.00）	47	10x12.5	1200	50

JAMICON Radial Type Conductive Polymer Aluminum Solid Capacitors TEAPO

Jamicon Series：FT
Teapo Series：FT Low ESR Series




■ Endurance:125℃,2000hrs
■ Recommended Applications:Power Supply,Home appliances,Charger,Inverter
■ Corresponding product to RoHS


■ Specifications

Item	Characteristics
Category Temperature Range	-55 ~ +125℃
Rated Voltage Range	6.3~80VDC
Rated Capacitance Range	10~ 1000μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	I≦0.2CV or 300(μA)whichever is greater (After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tan δ) (120Hz ,20℃)	WV 6.3~80 tan δ 0.12
Endurance	After applying rated voltage for 2000 hours at 125℃,Stay back to 20℃ Temperature measurement, the capacitor shall meet the following requirement. Appearance: No significant damage Capacitance Change: Within ±20% of the initial value Dissipation Factor: Not more than 150% of the initial specified value Equivalent Series Resistance: Not more than 150% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃ ，the capacitors shall meet the requirement as Endurance.
Surge voltage test	After subjecting to 1000 cycles each consisting of charge with the surge voltage specified at normal temperature for 30 s through a protective resistor and discharge for 5 minutes 30 seconds,the capacitors shall meet the requirement as Endurance.

■ Diagram of Dimensions

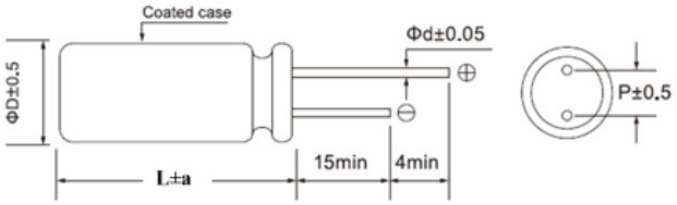

■ Marking : case with red printing

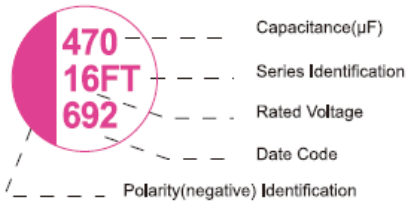

SIZE	ΦD x L	P	Φd	a
E06	6.3x6	2.5	0.5	1.5
E08	6.3x8	2.5	0.5or0.6	1.0
E15	6.3x15	2.5	0.6	1.0
G08	8x8	3.5	0.6	1.0
G1B	8x11.5	3.5	0.6	1.0
G15	8x15	3.5	0.6	1.5
G20	8x20	3.5	0.6	1.5
H1A	10x10.5	5.0	0.6	1.0
H1C	10x12.5	5.0	0.6	1.0
H16	10x16	5.0	0.6	1.0
H20	10x20	5.0	0.6	1.5

■ Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.05	0.30	0.70	1.00

Jamicon Series：FT
Teapo Series：FT

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE(mA/rms,100kHz)		ESR (mΩ,20℃ 100kHz)	LC (μA max/2min)
			Tx：125℃	Tx：105℃		
6.3（7.2）	180	6.3x6	537	1700	45	300
	220	6.3x6	537	1700	45	300
	270	6.3x6	810	2560	45	340
	330	6.3x6	810	2560	45	415
	470	6.3x8	810	2560	35	592
		8x8	810	2560	15	592
	560	8x8	1332	4210	15	705
	680	8x8	1721	5440	15	856
	820	8x8	1721	5440	15	1033
	1000	8x11.5	1721	5440	15	1260
10（11.5）	180	6.3x8	537	1700	45	360
	220	8x8	810	2560	35	440
	270	8x8	810	2560	35	540
	330	6.3x8	537	1700	45	660
		8x8	810	2560	35	660
	470	8x8	810	2560	35	940
	560	8x8	810	2560	35	1120
	680	8x11.5	1332	4210	15	1360
16（18.4）	82	6.3x8	512	1620	50	300
	100	6.3x8	512	1620	50	320
	120	6.3x8	670	2120	50	384
	150	6.3x8	670	2120	50	480
	180	8x8	1151	3640	20	576
	220	8x8	1151	3640	20	704
	270	8x11.5	1493	4720	20	864
	330	8x11.5	1151	3640	20	1056
		10x12.5	1493	4720	16	1056
	470	10x12.5	1493	4720	16	1504
20(23)	47	6.3x8	458	1450	60	300
	56	6.3x8	598	1890	60	300
	68	6.3x8	598	1890	60	300
	82	6.3x8	1050	3320	60	328
	100	8x11.5	1050	3320	24	400
	120	8x11.5	1367	4320	24	480
	150	8x11.5	1367	4320	24	600
25(28.75)	10	6.3x8	458	1450	60	300
	22	6.3x8	458	1450	60	300
	33	6.3x8	458	1450	60	300
	47	6.3x8	598	1890	60	300
	56	6.3x8	598	1890	60	300
	68	6.3x8	1050	3320	60	340
	82	6.3x8	1050	3320	60	410
	100	8x11.5	1050	3320	24	500
		10x12.5	1367	4320	20	500
	150	8x11.5	1367	4320	24	750
	220	8x11.5	1050	3320	24	1100
	270	8x15	1367	4320	20	1350
	330	10x12.5	1367	4320	20	1650

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE(mA/rms,100kHz)		ESR (mΩ,20℃ 100kHz)	LC (μA max/2min)
			Tx：125℃	Tx：105℃		
35（40.25）	47	6.3x8	379	1200	40	329
	220	6.3x15	790	2500	35	1540
	100	8x8	632	2000	30	700
	150	8x11.5	727	2300	28	1050
	220	10x10.5	758	2400	35	1540
	330	8x15	1200	3800	25	2310
	680	8x20	1264	4000	22	4760
		10x16	948	3000	30	4760
	1000	10x20	1264	4000	25	7000
50（57.5）	22	6.3x8	348	1100	60	300
	47	8x8	379	1200	55	470
	100	10x10.5	695	2200	45	1000
	220	10x16	885	2800	35	2200
63（72.45）	47	8x8	348	1100	65	592
	100	8x15	632	2000	50	1260
		10x12.5	632	2000	55	1260
	220	10x20	1138	3600	20	2772
80（92）	10	6.3x8	284	900	80	300
	22	8x8	316	1000	75	352
	56	10x12.5	632	2000	50	896
	100	10x16	695	2200	40	1600
	150	10x20	1106	3500	20	2400

JAMICON SMD Type Conductive Polymer Hybrid Capacitors TEAPO

Jamicon Series：YD
Teapo Series：YD Standard Series






■ Endurance:105℃,5000~10000hrs
■ Recommended Applications:Automotive,Monitor,Charger,Power Supply
■ Corresponding product to RoHS
■ AEC-Q200 qualified


■ Specifications


Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	16~80VDC
Rated Capacitance Range	22~ 470μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	I≦0.01CV or 3(μA)whichever is greater,(After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tan δ) (120Hz ,20℃)	WV 16 25 35~80 tan δ 0.16 0.14 0.12
Endurance	After applying rated voltage with rated ripple current for 5000 ~ 10000 hours at 105℃,when the capacitors are restored to 20℃,the capacitors shall meet the following requirements. Appearance: No significant damage Capacitance Change: Within ±30% of the initial value Dissipation Factor: Not more than 200% of the initial specified value Equivalent Series Resistance: Not more than 200% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃ ，the capacitors shall meet the requirement as Endurance.
Resistance to Soldering Heat＊	Capacitance Change: Within ±10% of the initial value Dissipation Factor: Not more than the initial specified value Equivalent Series Resistance: Not more than the initial specified value Leakage Current: Not more than the initial specified value


■ Diagram of Dimensions

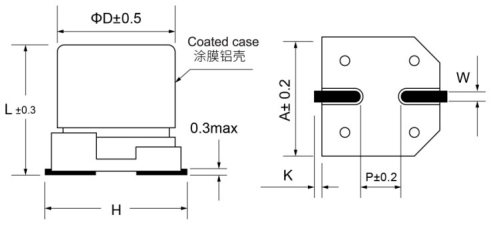

■ Marking : case with red printing

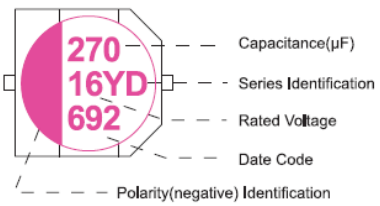





	SIZE	ΦD x L	A	H(Max)	W	P	K
Standard Version	EA1	6.3x5.8	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	EA4	6.3x7.7	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2

	SIZE	ΦD x L	A	H(Max)	W	P	K
Anti-Standard Version	EA4	6.3x7.7	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2

■ Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.10	0.30	0.60	1.00

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：YD
Teapo Series：YD

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE Φ DxL(mm)	RIPPLE(mA/rms,105°C100kHz)	ESR (mΩ,20℃ 100kHz)	LC (μA max/2min)
16（18.4）	47	6.3x5.8	1300	50	7.52
	120	6.3x7.7	2000	30	19.2
	220	8x10.4	2300	27	35.2
	270	10x10.2	2500	20	43.2
	470	10x12.2	2800	18	75.2
25（28.75）	56	6.3x5.8	1300	50	14
	100	6.3x7.7	2000	30	25
	150	8x10.4	2300	27	37.5
	220	10x10.2	2500	20	55
	330	10x12.2	2900	16	82.5
35（40.3）	33	6.3x5.8	1300	60	11.55
	47	6.3x5.8	1300	60	16.45
	68	6.3x7.7	2000	35	23.8
	100	8x10.4	2300	27	35
	220	10x10.2	2500	20	77
	270	10x12.2	2600	18	94.5
50（57.5）	22	6.3x7.7	1600	40	11
	47	8x10.4	1800	30	23.5
	100	10x10.2	2000	28	50
63（72.5）	33	8x10.4	1700	40	20.79
	56	10x10.2	1800	30	35.28
	68	10x12.2	2000	25	42.84
80（92）	22	8x10.4	1500	45	17.6
	33	10x10.2	1600	36	26.4
	47	10x10.2	1600	36	37.6

Jamicon Series：YA
Teapo Series：YA

Standard Series






- Endurance:125℃,4000hrs
- Recommended Applications:Automotive,New Energy,Server,Smart Meter,Router
- Corresponding product to RoHS
- AEC-Q200 qualified


Specifications


Item	Characteristics
Category Temperature Range	-55 ~ +125℃
Rated Voltage Range	16~80VDC
Rated Capacitance Range	22~ 470μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	I≦0.01CV or 3(μA)whichever is greater,(After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tan δ) (120Hz ,20℃)	WV: 16 / 25 / 35~80 tan δ: 0.16 / 0.14 / 0.12
Endurance	After applying rated voltage with rated ripple current for 4000 hours at 125℃ ,when the capacitors are restored to 20℃,the capacitors shall meet the following requirements. Appearance: No significant damage Capacitance Change: Within ±30% of the initial value Dissipation Factor: Not more than 200% of the initial specified value Equivalent Series Resistance: Not more than 200% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃ ，the capacitors shall meet the requirement as Endurance.
Resistance to Soldering Heat＊	Capacitance Change: Within ±10% of the initial value Dissipation Factor: Not more than the initial specified value Equivalent Series Resistance: Not more than the initial specified value Leakage Current: Not more than the initial specified value


Diagram of Dimensions

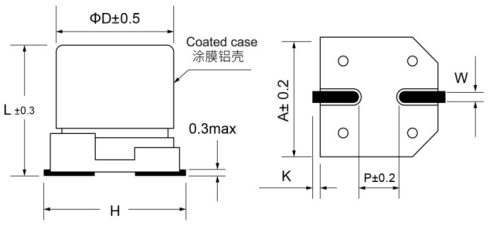

Marking : case with red printing

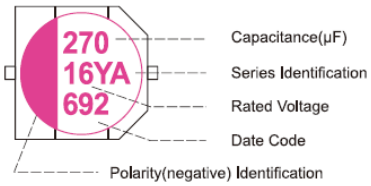





	SIZE	ΦD x L	A	H(Max)	W	P	K
Standard Version	EA1	6.3x5.8	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	EA4	6.3x7.7	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2

	SIZE	ΦD x L	A	H(Max)	W	P	K
Anti-Standard Version	EA4	6.3x7.7	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2

Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.10	0.30	0.60	1.00

Jamicon Series：YA
Teapo Series：YA

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE(mA/rms,125°C100kHz)	ESR (mΩ,20℃ 100kHz)	LC (μA max/2min)
16（18.4）	47	6.3x5.8	900	50	7.52
	100	6.3x7.7	1400	30	16
	220	8x10.4	1600	27	35.2
	270	10x10.2	2000	20	43.2
	470	10x12.2	2200	18	75.2
25（28.75）	56	6.3x5.8	900	50	14
	100	6.3x7.7	1400	30	25
	150	8x10.4	1600	27	37.5
	220	10x10.2	1800	22	55
	330	10x12.2	2200	20	82.5
35（40.3）	33	6.3x5.8	900	60	11.55
	47	6.3x5.8	900	60	16.45
	68	6.3x7.7	1400	35	23.8
	150	8x10.4	1600	27	52.5
	220	10x10.2	2000	20	77
	270	10x12.2	2200	18	94.5
50（57.5）	22	6.3x7.7	1000	40	11
	47	8x10.4	1200	30	23.5
	100	10x12.2	1800	25	50
63（72.5）	33	8x10.4	1100	40	20.79
	56	10x10.2	1400	30	35.3
	82	10x12.2	1600	25	51.66
80（92）	22	8x10.4	1050	45	17.6
	33	10x10.2	1380	36	26.4
	47	10x10.2	1380	36	37.6

Jamicon Series：YB
Teapo Series：YB High temperature resistance






- Endurance:135℃,2000~4000hrs
- Recommended Applications:Automotive and industrial use
- Corresponding product to RoHS
- AEC-Q200 qualified


Specifications


Item	Characteristics
Category Temperature Range	-55 ~ +135℃
Rated Voltage Range	16~63VDC
Rated Capacitance Range	22~ 560μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	I≦0.01CV or 3 (μA) whichever is greater (After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tan δ) (120Hz ,20℃)	WV 16 25 35 50 63~80 tan δ 0.16 0.14 0.12 0.10 0.08
Endurance	After applying rated voltage with rated ripple current for 2000 or 4000 hours at 125℃ or 135℃,when the capacitors are restored to 20℃,the capacitors shall meet the following requirements. Test Time: 125℃ 4000 Hrs; 135℃ 2000 Hrs for: ΦD=6.3, 4000 Hrs for: ΦD=8~10 Appearance: No significant damage Capacitance Change: Within ±30% of the initial value Dissipation Factor: Not more than 200% of the initial specified value Equivalent Series Resistance: Not more than 200% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃,the capacitors shall meet the requirement as Endurance.
Resistance to Soldering Heat＊	Capacitance Change: Within ±10% of the initial value Dissipation Factor: Not more than the initial specified value Equivalent Series Resistance: Not more than the initial specified value Leakage Current: Not more than the initial specified value


Diagram of Dimensions

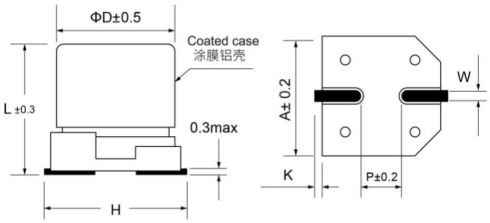

Marking : case with red printing

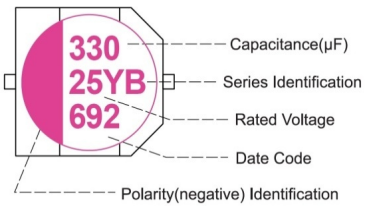





(Notes) Φ10X16.5=L±0.5

	SIZE	ΦD x L	A	H(Max)	W	P	K
Standard Version	EA1	6.3x5.8	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	EA4	6.3x7.7	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	EA5	6.3x9.7	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HAA	10x16.5	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2

	SIZE	ΦD x L	A	H(Max)	W	P	K
Anti-Standard Version	EA4	6.3x7.7	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	EA5	6.3x9.7	6.6	7.8	0.65±0.15	1.8±0.2	0.35+0.15/-0.2
	GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HAA	10x16.5	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2

Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.10	0.30	0.60	1.00

Jamicon Series：YB
Teapo Series：YB

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE(mA/rms,100kHz)		ESR (mΩ,20℃ 100kHz)	LC (μA max/2min)
			Tx：125℃	Tx：135℃		
16（18.4）	82	6.3x5.8	1700	950	45	13.12
	150	6.3x7.7	2500	1450	27	24
	270	8x10.4	3050	1700	20	43.2
	470	10x10.2	3400	2100	18	75.2
	560	10x12.2	4200	2550	15	89.6
25(28.8)	56	6.3x5.8	1400	900	50	14
	100	6.3x7.7	2100	1400	30	25
	220	8x10.4	2900	1600	22	55
	330	10x10.2	3300	2000	20	82.5
	470	10x12.2	4050	2500	16	117.5
	560	10x16.5	4300	2500	14	140
35(40.3)	47	6.3x5.8	1400	900	60	16.45
	68	6.3x7.7	2100	1400	35	23.8
	150	8x10.4	2900	1600	22	52.5
	270	10x10.2	3300	2000	20	94.5
	330	10x12.2	3950	2400	17	115.5
	470	10x16.5	4300	2500	14	164.5
50(57.5)	33	8x10.4	2400	1250	30	16.5
	47	8x10.4	2400	1250	30	23.5
	56	10x10.2	2900	1600	25	28
	68	8x10.4	2400	1250	30	34
	100	10x10.2	2900	1600	25	50
	120	10x10.2	2900	1600	25	60
	180	10x12.2	3700	2250	19	90
	220	10x16.5	4100	2400	16	110
63(72.5)	22	8x10.4	2100	1100	40	13.86
	33	8x10.4	2100	1100	40	20.79
	33	10x10.2	2600	1400	30	20.79
	47	8x10.4	2100	1100	10	29.61
	56	10x10.2	2600	1400	30	35.28
	82	10x10.2	2600	1400	30	51.66
	100	10x12.2	3450	2100	22	63
	150	10x16.5	4100	2400	16	94.5

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：YK
Teapo Series：YK

High Ripple& Low ESR






- Endurance:150℃,1000hrs
- Recommended Applications: Industrial equipment
- Corresponding product to RoHS
- AEC-Q200 qualified


Specifications


Item	Characteristics
Category Temperature Range	-55 ~ +150℃
Rated Voltage Range	25~63VDC
Rated Capacitance Range	33~ 270μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	I≦0.01CV or 3 (μA) whichever is greater (After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tan δ) (120Hz ,20℃)	WV 25 35 50 63 tan δ 0.14 0.12 0.10 0.08
Endurance	After applying rated voltage with rated ripple current for 1000 hours at 150℃,when the capacitors are restored to 20℃,the capacitors shall meet the following requirements. Appearance: No significant damage Capacitance Change: Within ±30% of the initial value Dissipation Factor: Not more than 200% of the initial specified value Equivalent Series Resistance: Not more than 200% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	after subjecting 90 to 95% RH for 1000 hours at 60℃ ，the capacitors shall meet the requirement as Endurance.
Resistance to Soldering Heat＊	Capacitance Change: Within ±10% of the initial value Dissipation Factor: Not more than the initial specified value Equivalent Series Resistance: Not more than the initial specified value Leakage Current: Not more than the initial specified value


Diagram of Dimensions

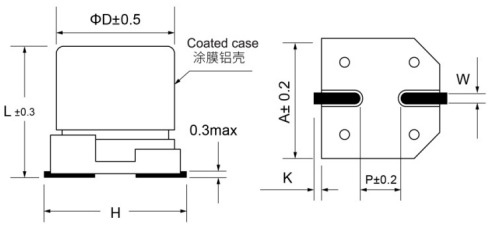

Marking : case with red printing







	SIZE	ΦD x L	A	H(Max)	W	P	K
Standard Version	GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2

	SIZE	ΦD x L	A	H(Max)	W	P	K
Anti-Standard Version	GA6	8x10.4	8.3	10	0.9±0.2	3.1±0.2	0.5±0.2
	HA5	10x10.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2
	HA8	10x12.2	10.3	12	0.9±0.2	4.6±0.2	0.5±0.2

Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.10	0.30	0.60	1.00

Jamicon Series：YK
Teapo Series：YK

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,150℃100KHz)	ESR (mΩ,20℃100KHz)	LC (μA max/2min)
25（28.75)	220	8x10.4	800	27	55
	270	10x10.2	1000	20	67.5
35（40.3)	100	8x10.4	770	30	35
	150	10x10.2	950	23	52.5
50（57.5)	56	8x10.4	700	35	28
	100	10x12.2	900	28	50
63（72.5)	33	8x10.4	650	40	20.8
	56	10x10.2	840	30	35.3

Jamicon Series：YS
Teapo Series：YS Standard Series


■ Endurance:105℃,5000~10000hrs
■ Recommended Applications:Automotive,Printer,Inverter
■ Corresponding product to RoHS



■ Specifications


Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	16~80VDC
Rated Capacitance Range	10~1500μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	I≦0.01CV or 3 (μA) whichever is greater (After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tan δ) (120Hz ,20℃)	WV: 16 / 25 / 35~80 tan δ: 0.16 / 0.14 / 0.12
Endurance	After applying rated voltage with rated ripple current for 50000~10000 hours at 105℃,when the capacitors are restored to 20℃,the capacitors shall meet the following requirements. Appearance: No significant damage Capacitance Change: Within ±30% of the initial value Dissipation Factor: Not more than 200% of the initial specified value Equivalent Series Resistance: Not more than 200% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃ ，the capacitors shall meet the requirement as Endurance.
Surge voltage test	After subjecting to 1000 cycles each consisting of charge with the surge voltage specified at normal temperature for 30 seconds through a protective resistor and discharge for 5 minutes 30 seconds,the capacitors shall meet the requirement as Endurance.

■ Diagram of Dimensions

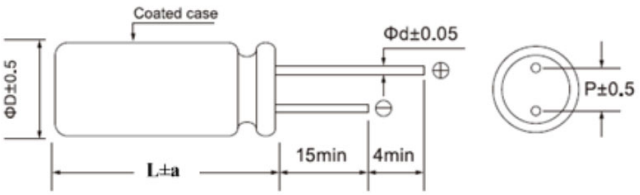

SIZE	ΦD x L	P	Φd	a
E08	6.3x8	2.5	0.6	1.0
G08	8x8	3.5	0.6	1.0
G1B	8x11.5	3.5	0.6	1.0
H1A	10x10.5	5.0	0.6	1.0
H1C	10x12.5	5.0	0.6	1.0
H16	10x16	5.0	0.6	1.0

■ Marking : case with red printing



■ Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.10	0.30	0.60	1.00

Jamicon Series：YS
Teapo Series：YS

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,105℃100KHz)	ESR (mΩ,20℃ 100KHz)	LC (μA max/2min)
16（18.4）	100	6.3x8	1500	40	16
	220	8x8	2000	26	35.2
	270	8x11.5	2350	23	43.2
	470	10x10.5	2600	21	75.2
	560	10x12.5	3000	15	89.6
	1500	10x16	4200	15	240
25（28.75）	68	6.3x8	1400	45	17
	150	8x8	1900	27	37.5
	220	8x11.5	2300	24	55
	270	10x10.5	2550	22	67.5
	330	10x12.5	2900	16	82.5
	820	10x16	3800	15	205
35（40.25）	47	6.3x8	1300	60	16.5
	120	8x8	1800	30	42
	150	8x11.5	2100	25	52.5
	220	10x10.5	2500	23	77
	270	10x12.5	2800	17	94.5
	560	10x16	3700	14	196
50（57.5）	15	6.3x8	1200	80	7.5
	33	8x8	1700	35	16.5
	47	8x11.5	1900	30	23.5
	56	10x10.5	2300	25	28
	100	10x12.5	2700	19	50
	180	10x16	3000	16	90
63（72.45）	10	6.3x8	1080	90	6.3
	22	8x8	1600	40	13.86
	27	8x11.5	1800	35	17.01
	33	10x10.5	2200	30	20.79
	56	10x12.5	2600	22	35.28
	120	10x16	3000	18	75.6
80（92）	22	8x8	1200	50	17.6
	33	10x10.5	1700	35	26.4
	47	10x12.5	2000	30	37.6

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：YX
Teapo Series：YX Standard Series




■ Endurance:125℃,4000hrs
■ Recommended Applications: Automotive,Home appliance,Server
■ Corresponding product to RoHS

■ Specifications


Item	Characteristics
Category Temperature Range	-55 ~ +125℃
Rated Voltage Range	16~80VDC
Rated Capacitance Range	22~1000 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	I≦0.01CV or 3 (μA) whichever is greater (After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tan δ) (120Hz ,20℃)	WV: 16 / 25 / 35~80 tan δ: 0.16 / 0.14 / 0.12
Endurance	After applying rated voltage with rated ripple current for 4000 hours at 125℃ ,when the capacitors are restored to 20℃,the capacitors shall meet the following requirements. Appearance: No significant damage Capacitance Change: Within ±30% of the initial value Dissipation Factor: Not more than 200% of the initial specified value Equivalent Series Resistance: Not more than 200% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃ ，the capacitors shall meet the requirement as Endurance.
Surge voltage test	After subjecting to 1000 cycles each consisting of charge with the surge voltage specified at normal temperature for 30 seconds through a protective resistor and discharge for 5 minutes 30 seconds,the capacitors shall meet the requirement as Endurance.

■ Diagram of Dimensions

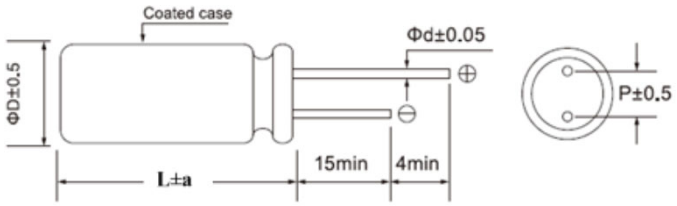

SIZE	ΦD x L	P	Φd	a
E08	6.3x8	2.5	0.6	1.0
G08	8x8	3.5	0.6	1.0
G1B	8x11.5	3.5	0.6	1.0
H1A	10x10.5	5.0	0.6	1.0
H1C	10x12.5	5.0	0.6	1.0
H16	10x16	5.0	0.6	1.0

■ Marking : case with red printing

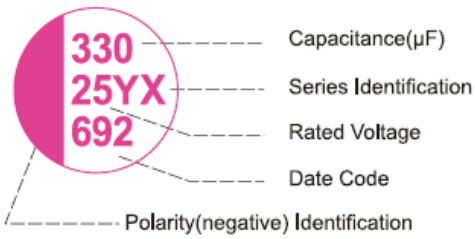

■ Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.10	0.30	0.60	1.00

Jamicon Series：YX
Teapo Series：YX

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,125℃100KHz)	ESR (mΩ,20℃ 100KHz)	LC (μA max/2min)
16（18.4）	100	6.3x8	900	50	16
	220	6.3x8	900	50	35.2
	270	8x11.5	1700	25	43.2
	330	10x10.5	2000	20	52.8
	470	10x12.5	2200	20	75.2
	1000	10x16	3000	16	160
25（28.75）	100	6.3x8	1400	35	25
	180	8x8	1600	30	45
	220	8x11.5	1700	25	55
	330	10x12.5	2000	20	82.5
35（40.25）	68	6.3x8	1300	35	23.8
	150	8x11.5	1600	30	52.5
	270	10x10.5	2000	20	94.5
	330	10x12.5	2200	18	115.5
50（57.5）	33	6.3x8	750	80	16.5
	47	8x11.5	1350	30	23.5
	100	10x10.5	1600	28	50
	220	10x16	2200	18	110
63（72.5）	22	6.3x8	900	80	13.86
	33	8x11.5	1100	40	20.79
	56	10x10.5	1350	30	35.28
	100	10x16	1800	18	63
80（92）	22	8x11.5	1000	45	17.6
	33	10x10.5	1300	35	26.4
	47	10x10.5	1300	35	37.6

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：YE
Teapo Series：YE High temperature resistance


■ Endurance:135℃,4000hrs
■ Recommended Applications:Machine tools, industrial equipment
■ Corresponding product to RoHS



■ Specifications


Item	Characteristics
Category Temperature Range	-55 ~ +135℃
Rated Voltage Range	25~80VDC
Rated Capacitance Range	47~ 330μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	I≦0.01CV or 3 (μA) whichever is greater (After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tan δ) (120Hz ,20℃)	WV: 25 / 35 / 50 / 63~80 tan δ: 0.14 / 0.12 / 0.10 / 0.08
Endurance	After applying rated voltage with rated ripple current for 4000 hours at 125℃ or 135℃,when the capacitors are restored to 20℃,the capacitors shall meet the following requirements. Test Time: 125℃ 4000 Hrs / 135℃ 4000 Hrs Appearance: No significant damage Capacitance Change: Within ±30% of the initial value Dissipation Factor: Not more than 200% of the initial specified value Equivalent Series Resistance: Not more than 200% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃，the capacitors shall meet the requirement as Endurance.
Surge voltage test	After subjecting to 1000 cycles each consisting of charge with the surge voltage specified at normal temperature for 30 seconds through a protective resistor and discharge for 5 minutes 30 seconds,the capacitors shall meet the requirement as Endurance.

■ Diagram of Dimensions

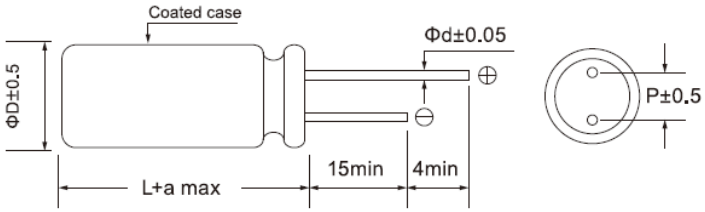

SIZE	ΦD x L	P	Φd	a
H1C	10x12.5	5.0	0.6	1.0

■ Marking : case with red printing

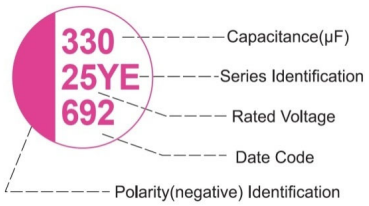

■ Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.10	0.30	0.60	1.00

Jamicon Series：YE

Teapo Series：YE

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE(mA/rms,100kHz)		ESR (mΩ,20℃ 100kHz)	LC (μA max/2min)
			Tx：125℃	Tx：135℃		
25(28.75)	330	10x12.5	3800	2300	16	82.5
35(40.25)	270	10x12.5	3700	2200	17	94.5
50(57.5)	120	10x12.5	3500	2100	19	60
63(72.45)	100	10x12.5	3400	2000	20	63
80(92)	47	10x12.5	3200	1800	22	37.6

JAMICON Radial Type Conductive Polymer Hybrid Capacitors TEAPO

Jamicon Series：YH
Teapo Series：YH High Ripple& Low ESR




■ Endurance:150℃,1000hrs
■ Recommended Applications: Industrial equipment
■ Corresponding product to RoHS


■ Specifications

Item	Characteristics
Category Temperature Range	-55 ~ +150℃
Rated Voltage Range	25~63VDC
Rated Capacitance Range	33~ 330μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Surge Voltage	Rated voltage（V) x 1.15
Leakage Current (20℃)	I≦0.01CV or 3 (μA) whichever is greater (After rated voltage applied for 2 minutes) I： Leakage Current (μA) C：Capacitance(μF) V： Rated Voltage Range(VDC)
Dissipation Factor (MAX) (tan δ) (120Hz ,20℃)	WV: 25 / 35 / 50 / 63 tan δ: 0.14 / 0.12 / 0.10 / 0.08
Endurance	After applying rated voltage with rated ripple current for 1000 hours at 150℃,when the capacitors are restored to 20℃,the capacitors shall meet the following requirements. Test Time: 150℃, 1000 Hrs Appearance: No significant damage Capacitance Change: Within ±30% of the initial value Dissipation Factor: Not more than 200% of the initial specified value Equivalent Series Resistance: Not more than 200% of the initial specified value Leakage Current: Not more than the initial specified value
Humidity Test	After subjecting 90 to 95% RH for 1000 hours at 60℃，the capacitors shall meet the requirement as Endurance.
Surge voltage test	After subjecting to 1000 cycles each consisting of charge with the surge voltage specified at normal temperature for 30 seconds through a protective resistor and discharge for 5 minutes 30 seconds,the capacitors shall meet the requirement as Endurance.

■ Diagram of Dimensions

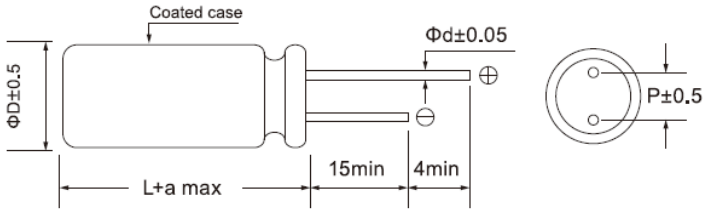

■ Marking : case with red printing

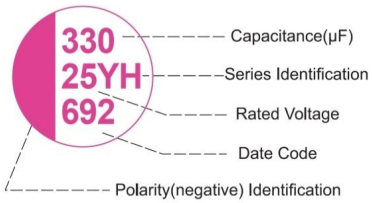

SIZE	ΦD x L	P	Φd	a
G1B	8x11.5	3.5	0.6	1.0
H1A	10x10.5	5.0	0.6	1.0
H1C	10x12.5	5.0	0.6	1.0

■ Multiplier for Ripple Current

Frequency(HZ)	120≦F＜1K	1K≦F＜10K	10K≦F＜100K	100K≦F≦500K
Coefficient	0.10	0.30	0.60	1.00

Jamicon Series：YH

Teapo Series：YH

■Dimensions,Rated Ripple Current,Equivalent Series Resistance

Rated (Surge) Voltage(V)	Capacitance (μF)	SIZE ΦDxL(mm)	RIPPLE (mA/rms,150℃ 100KHz)	ESR (mΩ,20℃ 100KHz)	LC (μA max/2min)
25(28.75)	220	8x11.5	800	27	55
	270	10x10.5	1000	20	67.5
	330	10x12.5	1200	18	82.5
35(40.25)	100	8x11.5	770	30	35
	150	10x10.5	950	23	52.5
50(57.5)	56	8x11.5	700	35	28
	120	10x12.5	900	28	60
63(72.45)	33	8x11.5	650	40	20.79
	56	10x10.5	840	30	35.28

Jamicon Series：CS
Teapo Series：GV General purpose Series

■ Endurance:85℃, 2000 hours

■Recommended Applications: Suitable for AV(TV,Video,Audio),Monitor/Computer, Home appliance, OA/HA/Communication

■ Corresponding product to RoHS

■ AEC-Q200 compliant : Please contact Jamicon for more details, test data, information



Jamicon



Teapo

■ Specifications

Item	Characteristics
Category Temperature Range	-55 ~ +85℃
Rated Voltage Range	4 ~ 100VDC
Rated Capacitance Range	1 ~ 1500 μF
Capacitance Tolerance	± 20 % at 120Hz , 20℃
Leakage Current (20℃)	I≦0.01CV or 3 μA ,whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	Shown in the table of standard rating

Low Temperature Stability Impedance Ratio (MAX)

WV / Z(120HZ)	4	6.3	10	16	25	35	50	63	100
Z(-25℃) / Z(20℃)	7	4	3	2	2	2	2	2	2
Z(-40℃) / Z(20℃)	15	8	6	4	4	3	3	3	3

Endurance


After applying rated voltage for 2000hrs at 85℃,Stay back to 20 ℃ tempe (Notes) Φ8 ~ Φ10&6.3X7.7=L±0.3 meet the following requirements.

Capacitance Change	Within ±20% of the initial value
Dissipation Factor	Not more than 200% of the specified value
Leakage Current	Not more than the specified value


Shelf Life

The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 85℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■MARKING




Teapo



Jamicon

■Dimensions [mm]

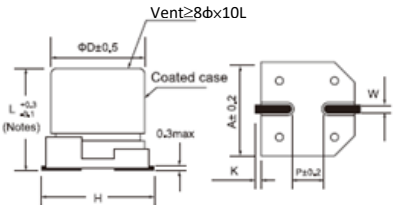

(Notes) Φ8 ~ Φ10&6.3X7.7=L±0.3

Dimensions	ΦD	L	A	H	W	P	K
B01	4.0	5.4	4.3	5.5 Max	0.65±0.1	1.0	0.35+0.15/-0.2
C01	5.0	5.4	5.3	6.5 Max	0.65±0.1	1.5	0.35+0.15/-0.2
E01	6.3	5.4	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2
E04	6.3	7.7	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2
G02	8.0	6.2	8.3	9.5 Max	0.65±0.1	2.2	0.35+0.15/-0.2
G03	8.0	10.2	8.3	10.0 Max	0.90±0.2	3.1	0.70±0.20
H03	10.0	10.2	10.3	12.0 Max	0.90±0.2	4.6	0.70±0.20

■ Multiplier for Ripple Current

Frequency (Hz)	60	120	1K	10K
Coefficient	0.80	1.00	1.15	1.25

Jamicon Series：CS

Teapo Series：GV

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 85℃) (120Hz)
4(5)	33	4x5.4	0.35	26
	47	4x5.4	0.35	34
	100	5x5.4	0.35	61
	220	6.3x5.4	0.35	82
	330	6.3x5.4	0.35	80
	470	6.3x7.7	0.35	200
6.3(8)	22	4x5.4	0.26	20
	33	4x5.4	0.26	22
	47	4x5.4	0.26	36
		5x5.4	0.26	46
	100	5x5.4	0.26	47
		6.3x5.4	0.26	71
		6.3X7.7	0.26	143
	220	6.3x5.4	0.26	74
		6.3x7.7	0.26	235
	330	6.3x7.7	0.26	280
		8x6.2	0.26	280
	470	8x6.2	0.26	312
		8x10.2	0.26	380
	1000	8x10.2	0.26	500
		10x10.2	0.26	700
	1500	10x10.2	0.26	750
10(13)	10	4x5.4	0.20	20
	22	4x5.4	0.20	28
		5x5.4	0.20	40
	33	4x5.4	0.20	29
		5x5.4	0.20	43
	47	5x5.4	0.20	43
		6.3X5.4	0.20	66
	100	5X5.4	0.20	43
		6.3x5.4	0.20	70
	150	6.3x5.4	0.20	86
	220	6.3x5.4	0.20	110
		6.3x7.7	0.20	250
		8x6.2	0.20	250
	330	8x10.2	0.20	330
	470	8x10.2	0.20	390
		10x10.2	0.20	400
	680	8x10.2	0.20	420
	1000	10x10.2	0.20	580
16(20)	1	4x5.4	0.16	10
	4.7	4x5.4	0.16	20
	10	4x5.4	0.16	28
		5x5.4	0.16	28
	22	4x5.4	0.16	28
		5x5.4	0.16	39
	33	4x5.4	0.16	30
		5x5.4	0.16	45
		6.3x5.4	0.16	66
	47	5x5.4	0.16	45
		6.3x5.4	0.16	70
		8x6.2	0.16	85
	100	6.3x5.4	0.16	70
		6.3x7.7	0.16	85
		8x6.2	0.16	140
	220	6.3x7.7	0.16	162
		8x10.2	0.16	280
	330	8x10.2	0.16	320
		10x10.2	0.16	380
	470	8x10.2	0.16	350
		10x10.2	0.16	420
	680	10x10.2	0.16	500
25(32)	4.7	4x5.4	0.14	22
	10	4x5.4	0.14	24
		5x5.4	0.14	28
		6.3x5.4	0.14	28
	22	5x5.4	0.14	35
		6.3x5.4	0.14	55
	33	5x5.4	0.14	42
		6.3x5.4	0.14	65
	47	6.3x5.4	0.14	70
		6.3x7.7	0.14	96
		8x6.2	0.14	100
	100	6.3x5.4	0.14	80
		6.3x7.7	0.14	143
		8x6.2	0.14	143
		8x10.2	0.14	180
	180	8x10.2	0.14	210
	220	8x10.2	0.14	230
		10x10.2	0.14	310
	330	8x10.2	0.14	270
		10x10.2	0.14	340
	470	10x10.2	0.14	380
35(44)	2.2	4x5.4	0.12	8
	3.3	4x5.4	0.12	10
		5x5.4	0.12	11
	4.7	4x5.4	0.12	22
	10	4x5.4	0.12	24
		5x5.4	0.12	30
	22	5x5.4	0.12	36
		6.3x5.4	0.12	60
	33	6.3x5.4	0.12	60
		6.3x7.7	0.12	130
	47	6.3x5.4	0.12	70
		6.3x7.7	0.12	165
		8x6.2	0.12	165
	100	6.3x7.7	0.12	140
		8x10.2	0.12	180
		10x10.2	0.12	210
	220	8x10.2	0.12	200
		10x10.2	0.12	310
	150	8x10.2	0.12	180
	330	10x10.2	0.12	350
50(63)	1	4x5.4	0.12	10
	2.2	4x5.4	0.12	16
	3.3	4x5.4	0.12	16
	4.7	4x5.4	0.12	18
		5x5.4	0.12	23
	10	5x5.4	0.12	27
		6.3x5.4	0.12	36
	22	6.3x5.4	0.12	40
		6.3x7.7	0.12	90
	33	6.3x7.7	0.12	90
		8x6.2	0.12	130
		8x10.2	0.12	150
	47	6.3x7.7	0.12	90
		8x6.2	0.12	100
		8x10.2	0.12	190
	56	8x10.2	0.12	130
	100	8x10.2	0.12	200
		10x10.2	0.12	310
	220	10x10.2	0.12	460
63(79)	4.7	5x5.4	0.12	20
		6.3x5.4	0.12	20
	10	6.3x5.4	0.12	20
	22	6.3x7.7	0.12	40

Jamicon Series：CS

Teapo Series：GV

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ (%)	Ripple current (mA/rms 85℃) (120Hz)
63(79)	22	8x6.2	0.12	95
		8x10.2	0.12	120
	33	8x10.2	0.12	140
	47	8x10.2	0.12	170
		10x10.2	0.12	190
	100	10x10.2	0.12	280
100(125)	3.3	6.3X7.7	0.10	50
	4.7	6.3x5.4	0.10	40

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ (%)	Ripple current (mA/rms 85℃) (120Hz)
100(125)	4.7	6.3x7.7	0.10	50
		8x10.2	0.10	60
	10	6.3x7.7	0.10	50
		8X10.2	0.10	85
	22	8X10.2	0.10	125
		10X10.2	0.10	150
	33	10X10.2	0.10	180
	47	10x10.2	0.10	210

JAMICON Surface Mount Aluminium Electrolytic Capacitors TEAPO

Jamicon Series：CT
Teapo Series：SV General purpose Series

■ Endurance:105℃, 1000 hours
■ Recommended Applications: Suitable for AV(TV,Video,Audio),Monitor/Computer, Home appliance, OA/HA/Comm
■ Corresponding product to RoHS
■ AEC-Q200 compliant : Please contact Jamicon for more details, test data, information



Jamicon



Teapo

■ Specifications

Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	4 ~ 100VDC
Rated Capacitance Range	1 ~ 1500 μF
Capacitance Tolerance	± 20 % at 120Hz , 20℃
Leakage Current (20℃)	I≦0.01CV or 3 μA ,whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	Shown in the table of standard rating

Low Temperature Stability Impedance Ratio (MAX)

WV / Z(120HZ)	4	6.3	10	16	25	35	50	63	100
Z(-25℃) / Z(20℃)	7	4	3	2	2	2	2	2	2
Z(-40℃) / Z(20℃)	15	8	6	4	4	3	3	3	3

Endurance


After applying rated voltage for 1000hrs at 105℃,Stay back to 20 ℃ temperature measurement,the capacitors shall meet the following requirements.

Capacitance Change	Within ±20% of the initial value
Dissipation Factor	Not more than 200% of the specified value
Leakage Current	Not more than the specified value


Shelf Life

The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■MARKING

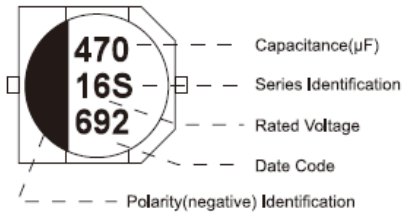


Teapo

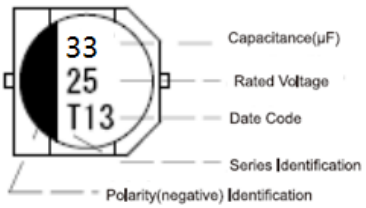

Jamicon

■Dimensions [mm]

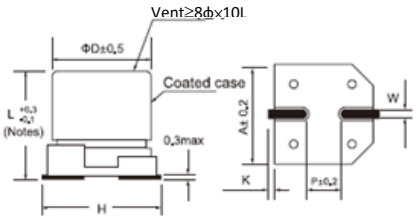

(Notes) Φ8 ~ Φ10&6.3X7.7=L±0.3

Dimensions	ΦD	L	A	H	W	P	K
B01	4.0	5.4	4.3	5.5 Max	0.65±0.1	1.0	0.35+0.15/-0.2
C01	5.0	5.4	5.3	6.5 Max	0.65±0.1	1.5	0.35+0.15/-0.2
E01	6.3	5.4	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2
E04	6.3	7.7	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2
G03	8.0	10.2	8.3	10.0 Max	0.90±0.2	3.1	0.70±0.20
H03	10.0	10.2	10.3	12.0 Max	0.90±0.2	4.6	0.70±0.20

■ Multiplier for Ripple Current

Frequency (Hz)	60	120	1K	10K
Coefficient	0.85	1.00	1.15	1.25

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：CT
Teapo Series：SV

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃) (120Hz)
4(5)	22	4x5.4	0.35	20
	33	4x5.4	0.35	26
	47	4x5.4	0.35	34
	100	5x5.4	0.35	61
	220	6.3x5.4	0.35	82
6.3(8)	22	4x5.4	0.30	29
	33	4x5.4	0.30	43
	47	4x5.4	0.30	43
		5x5.4	0.30	46
	100	5x5.4	0.30	47
		6.3x5.4	0.30	71
	220	6.3x5.4	0.30	74
		6.3x7.7	0.30	120
	330	6.3x7.7	0.30	175
		8X10.2	0.35	230
	470	8x10.2	0.35	300
	1000	8x10.2	0.35	300
		10x10.2	0.35	400
	1500	10x10.2	0.35	480
10(13)	10	4x5.4	0.22	24
	22	4x5.4	0.22	36
	33	4x5.4	0.22	45
		5x5.4	0.22	46
	47	5x5.4	0.22	46
		6.3X5.4	0.22	70
	100	6.3x5.4	0.22	71
		6.3X7.7	0.22	110
	150	6.3X5.4	0.22	86
	220	6.3x7.7	0.22	115
		8X10.2	0.26	160
	330	8x10.2	0.26	200
	470	8x10.2	0.26	230
		10x10.2	0.26	270
	1000	10x10.2	0.26	390
16(20)	4.7	4x5.4	0.16	20
	10	4x5.4	0.16	28
	22	4X5.4	0.16	28
		5x5.4	0.16	39
	33	5x5.4	0.16	39
		6.3x5.4	0.16	65
	47	5x5.4	0.16	39
		6.3x5.4	0.16	70
	100	6.3x5.4	0.16	80
		6.3x7.7	0.16	130
	220	6.3x7.7	0.16	105
		8x10.2	0.20	180
	330	8x10.2	0.20	220
		10x10.2	0.20	260
	470	8x10.2	0.20	270
		10x10.2	0.20	340
	680	10x10.2	0.20	380
25(32)	4.7	4x5.4	0.14	22
	10	4x5.4	0.14	22
		5x5.4	0.14	28
	22	5x5.4	0.14	35

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃) (120Hz)
25(32)	22	6.3x5.4	0.14	55
	33	5x5.4	0.14	45
		6.3x5.4	0.14	65
	47	6.3x5.4	0.14	71
		6.3x7.7	0.14	91
	100	6.3x7.7	0.14	95
		8x10.2	0.16	140
	220	8x10.2	0.16	200
		10x10.2	0.16	273
	330	8x10.2	0.16	250
		10x10.2	0.16	340
	470	10x10.2	0.16	360
35(44)	2.2	4x5.4	0.12	15
	3.3	4x5.4	0.12	18
	4.7	4x5.4	0.12	22
	10	4x5.4	0.12	25
		5x5.4	0.12	30
	22	5x5.4	0.12	35
		6.3x5.4	0.12	60
	33	6.3x5.4	0.12	60
		6.3x7.7	0.12	84
	47	6.3X5.4	0.12	60
		6.3x7.7	0.12	84
		8X10.2	0.14	100
	100	6.3x7.7	0.14	105
		8X10.2	0.14	150
	220	8x10.2	0.14	220
		10x10.2	0.14	250
	330	10x10.2	0.14	300
50(63)	1	4x5.4	0.12	10
	2.2	4x5.4	0.12	16
	3.3	4x5.4	0.12	16
	4.7	5x5.4	0.12	23
	10	6.3x5.4	0.12	35
	22	6.3x7.7	0.12	65
	33	6.3x7.7	0.12	70
		8x10.2	0.12	91
	47	6.3x7.7	0.12	75
		8x10.2	0.12	95
	100	8x10.2	0.12	110
		10x10.2	0.12	145
	220	10x10.2	0.12	210
63(79)	4.7	6.3x5.4	0.18	20
	10	6.3x5.4	0.18	20
	22	8x10.2	0.18	30
	33	8x10.2	0.18	30
	47	8x10.2	0.18	45
	100	10x10.2	0.18	60
100(125)	3.3	8X10.2	0.18	30
	4.7	8X10.2	0.18	50
	10	8X10.2	0.18	55
	22	10X10.2	0.18	60
	33	10X10.2	0.18	65
	47	10x10.2	0.18	65

Jamicon Series：CH
Teapo Series：DV

General purpose、High voltage purpose

- Endurance:105℃, 2000 hours
- Recommended Applications: Suitable for AV(TV,Video,Audio),Monitor/Computer, Home appliance, OA/HA/Communication,Industrial, Automobile, Meter.
- Corresponding product to RoHS
- AEC-Q200 compliant : Please contact Jamicon for more details, test data, information



Jamicon




Teapo

Specifications


Item	Characteristics					
Category Temperature Range	-55 ~ +105℃					-25 ~ +105℃
Rated Voltage Range	6.3 ~100VDC					160~450VDV
Rated Capacitance Range	1~ 8200μF					
Capacitance Tolerance	± 20 % (120Hz , 20℃)					
Leakage Current (20℃)	4~10Φ		12.5~18Φ			8~18Φ
	I≦0.01CV or 3(μA),whichever is greater.		I≦0.03CV or 4(μA),whichever is greater.			I≦0.04CV+100 uA
	(After rated voltage applied for 2 minutes)					(After rated voltage applied for 5 minutes)
	I= Leakage Current (μA) C= Nominal Capacitance (μF) V= Rated Voltage (V)					
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	Shown in the table of standard ratings					
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120HZ)	6.3	10	16	25	35~100	160~450
	Z(-25℃) / Z(20℃)	4	3	2	2	2	4
	Z(-40℃) / Z(20℃)	8	6	4	4	3	—
Endurance	After applying rated voltage for 2000hrs at 105℃,Stay back to 20 ℃ temperature measurement,the capacitors shall meet the following requirements.					
	Case (Φ)	4~6.3Φ				8~16Φ
	Capacitance Change	Within ±25% of the initial value				Within ±20% of the initial value
	Dissipation Factor	Not more than 200% of the specified value				
	Leakage Current	Not more than the specified value				
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hours at 105℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.					

MARKING

●≤10Φ




●≧12.5Φ




Teapo

●≤10Φ




●≧12.5Φ



Jamicon

Dimensions [mm]

● General structure

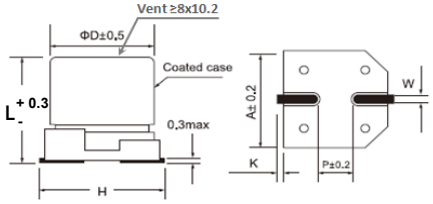

（Notes）φ8~φ10&6.3×7.7= L±0.3; ≥12.5 φ = L±1.0

Dimensions	ΦD	L	A	H	W	P	K
B01	4.0	5.4	4.3	5.5 Max	0.65±0.1	1.0	0.35+0.15/-0.2
C01	5.0	5.4	5.3	6.5 Max	0.65±0.1	1.5	0.35+0.15/-0.2
E01	6.3	5.4	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2
E04	6.3	7.7	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2
G02	8.0	6.2	8.3	9.5 Max	0.65±0.1	2.2	0.35+0.15/-0.2
G03	8.0	10.2	8.3	10.0 Max	0.90±0.2	3.1	0.70±0.20
H03	10.0	10.2	10.3	12.0 Max	0.90±0.2	4.6	0.70±0.20
K05	12.5	13.5	13.0	15.0 Max	1.20±0.2	4.4	0.70±0.30
K06	12.5	16	13.0	15.0 Max	1.20±0.2	4.4	0.70±0.30
M06	16.0	16.5	17.0	19.0 Max	1.20±0.2	6.4	0.70±0.30
N06	18.0	16.5	19.0	21.0 Max	1.20±0.2	6.5	0.70±0.30
N09	18.0	21.5	19.0	21.0 Max	1.20±0.2	6.5	0.70±0.30

Multiplier for Ripple Current

Frequency (Hz)	60	120	1K	10K
Coefficient	0.85	1.00	1.15	1.25

Jamicon Series：CH
Teapo Series：DV

■ STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃) (120Hz)
6.3(8)	22	4x5.4	0.30	26
	33	4x5.4	0.30	29
	47	4x5.4	0.30	31
		5x5.4	0.30	46
	100	5x5.4	0.30	47
		6.3x5.4	0.30	71
	220	6.3x5.4	0.30	80
		6.3x7.7	0.30	120
	330	6.3x7.7	0.30	140
		8x6.2	0.35	140
		8x10.2	0.35	290
	470	8x10.2	0.35	290
		10x10.2	0.35	380
	1000	8x10.2	0.35	290
		10x10.2	0.35	410
	1500	10x10.2	0.35	460
	2200	12.5x13.5	0.35	680
	3300	12.5x16	0.40	850
	4700	16x16.5	0.40	1000
	6800	18x16.5	0.40	1290
		16x21.5	0.40	1350
	8200	18x21.5	0.40	1450
10(13)	10	4x5.4	0.22	20
	22	4x5.4	0.22	23
	33	4x5.4	0.22	26
		5x5.4	0.22	45
	47	5x5.4	0.22	60
		6.3x5.4	0.22	70
	100	5x5.4	0.22	60
		6.3x5.4	0.22	75
		6.3x7.7	0.22	110
	220	6.3x7.7	0.22	120
		8x6.2	0.26	120
		8x10.2	0.26	260
	330	6.3x7.7	0.26	200
		8x10.2	0.26	290
	470	8x10.2	0.26	320
		10x10.2	0.26	380
	680	8x10.2	0.26	360
	1000	10x10.2	0.26	410
	2200	12.5x13.5	0.26	680
	3300	16x16.5	0.35	950
	4700	16x16.5	0.35	1000
	6800	18x16.5	0.35	1290
		16x21.5	0.35	1350
	8200	18x21.5	0.35	1450
16(20)	10	4x5.4	0.16	28
	22	4x5.4	0.16	29
		5x5.4	0.16	39
	33	5x5.4	0.16	40
	47	5x5.4	0.16	42
		6.3x5.4	0.16	70
	100	6.3x5.4	0.16	71
		6.3x7.7	0.16	130
	220	6.3x7.7	0.16	130
		8x6.2	0.20	130
		8x10.2	0.20	150
		10x10.2	0.20	210
	330	10x10.2	0.20	260
	470	8x10.2	0.20	240
		10x10.2	0.20	380
	1000	12.5x13.5	0.34	550
	2200	16x16.5	0.34	900
	3300	16x16.5	0.34	950
	4700	18x16.5	0.34	1225
		16x21.5	0.34	1275

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃) (120Hz)
25(32)	3.3	4x5.4	0.14	18
	4.7	4x5.4	0.14	22
	6.8	4x5.4	0.14	25
	10	4x5.4	0.14	25
		5x5.4	0.14	28
	22	5x5.4	0.14	28
		6.3x5.4	0.14	55
	33	6.3x5.4	0.14	65
	47	6.3x5.4	0.14	65
		6.3x7.7	0.14	91
	100	6.3x7.7	0.14	100
		8x6.2	0.16	100
		8x10.2	0.16	230
	220	8x10.2	0.16	270
		10x10.2	0.16	310
	330	8x10.2	0.16	290
		10x10.2	0.16	380
	470	10x10.2	0.16	380
	1000	12.5x13.5	0.26	510
	1500	12.5x16	0.26	590
	2200	16x16.5	0.26	900
	3300	18x16.5	0.26	1150
		16x21.5	0.26	1200
	4700	18x21.5	0.26	1300
35(44)	4.7	4x5.4	0.12	22
	6.8	4x5.4	0.12	25
	10	5x5.4	0.12	30
	22	5x5.4	0.12	35
		6.3x5.4	0.12	60
	33	6.3x7.7	0.12	80
		8x6.2	0.12	80
	47	6.3x5.4	0.12	60
		6.3x7.7	0.12	100
		8x10.2	0.14	210
	100	6.3x7.7	0.12	105
		8x10.2	0.14	240
		10x10.2	0.14	310
		12.5x13.5	0.14	390
	220	8x10.2	0.14	260
		10x10.2	0.14	350
	330	10x10.2	0.14	370
	470	12.5x13.5	0.22	520
	680	12.5x13.5	0.22	590
	1000	16x16.5	0.22	800
	1500	16x16.5	0.22	1000
	2200	18x16.5	0.22	1050
50(63)	1	4x5.4	0.12	10
	2.2	4x5.4	0.12	16
	3.3	4x5.4	0.12	16
	4.7	5x5.4	0.12	23
	6.8	5x5.4	0.12	30
	10	5x5.4	0.12	35
		6.3x5.4	0.12	40
	22	6.3x5.4	0.12	42
		6.3x7.7	0.12	65
	33	6.3x7.7	0.12	91
		8x6.2	0.12	110
	47	6.3x7.7	0.12	110
		8x6.2	0.12	110
		8x10.2	0.12	210
	100	8x10.2	0.12	240
		10x10.2	0.12	320
	150	10x10.2	0.12	300
	220	10x10.2	0.12	330
	330	12.5x13.5	0.08	490
	470	12.5x16	0.18	550

Jamicon Series：CH
Teapo Series：DV

■ STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ (%)	Ripple current (mA/rms 105℃) (120Hz)
50(63)	1000	16x16.5	0.18	800
63(79)	33	8x10.2	0.18	140
	47	8x10.2	0.18	170
	100	10x10.2	0.18	340
	150	10x10.2	0.18	360
	220	12.5x13.5	0.14	470
		12.5x16	0.14	550
	330	16x16.5	0.14	650
	470	16x16.5	0.14	700
100(125)	10	6.3x7.7	0.18	50
	22	8x10.2	0.18	100
	33	8x10.2	0.18	120
		10x10.2	0.18	150
	47	10x10.2	0.18	170
		12.5x13.5	0.18	250
	100	12.5x13.5	0.18	300
	330	18x16.5	0.18	590
		16x21.5	0.18	750
	470	18x21.5	0.18	980
160(200)	33	12.5x13.5	0.20	95
	47	16x16.5	0.20	240
	100	16x16.5	0.20	250

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ (%)	Ripple current (mA/rms 105℃) (120Hz)
200(250)	10	12.5x13.5	0.20	80
	22	12.5x16	0.20	110
	33	12.5x16	0.20	120
	47	16x16.5	0.20	220
	100	18x16.5	0.20	280
250(300)	3.3	12.5x13.5	0.20	60
	4.7	12.5x13.5	0.20	65
	10	12.5x13.5	0.20	70
	22	12.5x13.5	0.20	105
	33	16x16.5	0.20	180
	47	16x16.5	0.20	220
	100	18x21.5	0.20	290
400（450）	3.3	12.5x13.5	0.25	40
	4.7	12.5x13.5	0.25	45
	10	12.5x13.5	0.25	50
	22	16x16.5	0.25	85
	33	16x16.5	0.25	85
	47	18x21.5	0.25	130
450（500）	3.3	12.5x13.5	0.25	40
	4.7	12.5x13.5	0.25	45
	10	12.5x16	0.25	75
	22	16x16.5	0.25	85

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

JAMICON Surface Mount Aluminium Electrolytic Capacitors TEAPO

Jamicon Series：CK
Teapo Series：PV Low Impedance Series



Jamicon



Teapo

■ Endurance:105℃, 1000~2000 hours
■Recommended Applications: Suitable for AV(TV,Video,Audio),Monitor/Computer, Battery charger,DC/DC converter,SMPS,Noise filter
■ Corresponding product to RoHS
■ AEC-Q200 compliant : Please contact Jamicon for more details, test data, information

■ Specifications

Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	6.3~ 50VDC
Rated Capacitance Range	4.7 ~ 1500 μF
Capacitance Tolerance	± 20 % at 120Hz , 20℃
Leakage Current (20℃)	I≦0.01CV or 3 μA ,whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	Shown in the table of standard rating

Low Temperature Stability Impedance Ratio (MAX)

WV / Z(120HZ)	6.3	10	16	25	35	50
Z(-40℃) / Z(20℃)	3	2	2	2	2	2
Z(-55℃) / Z(20℃)	5	4	4	3	3	3

Endurance


After applying rated voltage for 1000~2000hrs at 105℃,Stay back to 20 ℃ temperature measurement,the capacitors shall meet the following requirements.

Capacitance Change	Within ±25% of the initial value
Dissipation Factor	Not more than 200% of the specified value
Leakage Current	Not more than the specified value


DΦ	4x5.4~6.3x7.7	8x10.2~10x10.2
Life	1000hrs	2000hrs

Shelf Life: The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■MARKING

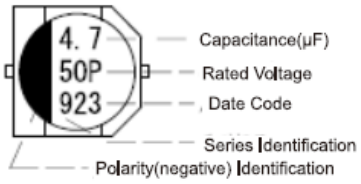


Teapo

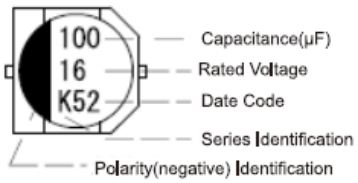

Jamicon

■Dimensions [mm]

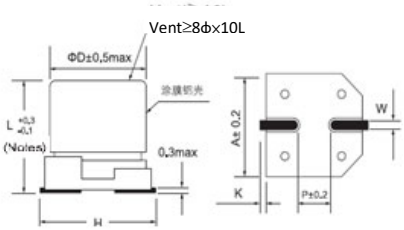

(Notes) Φ8 ~ Φ10&6.3X7.7=L±0.3

Dimensions	ΦD	L	A	H	W	P	K
B01	4.0	5.4	4.3	5.5 Max	0.65±0.1	1.0	0.35+0.15/-0.2
C01	5.0	5.4	5.3	6.5 Max	0.65±0.1	1.5	0.35+0.15/-0.2
E01	6.3	5.4	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2
E04	6.3	7.7	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2
G03	8.0	10.2	8.3	10.0 Max	0.90±0.2	3.1	0.70±0.20
H03	10.0	10.2	10.3	12.0 Max	0.90±0.2	4.6	0.70±0.20

■ Multiplier for Ripple Current

Frequency (Hz)	120	1K	10K	100K
Coefficient	0.70	0.80	0.90	1.00

Jamicon Series：CK

Teapo Series：PV

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃ 100KHz)	Impedance (Ω,20℃) (100KHz)
6.3(8)	27	4x5.4	0.24	90	1.45
	33	5x5.4	0.24	170	0.70
	47	5x5.4	0.24	170	0.70
	56	5x5.4	0.24	170	0.70
	68	6.3x5.4	0.24	250	0.39
	100	6.3x5.4	0.24	250	0.39
	150	6.3x5.4	0.24	250	0.39
	220	6.3x5.4	0.24	250	0.39
	330	6.3x7.7	0.24	300	0.30
	470	8x10.2	0.28	600	0.15
	680	8x10.2	0.28	600	0.15
	1000	8x10.2	0.28	600	0.15
	1500	10x10.2	0.28	850	0.08
10(13)	22	4x5.4	0.20	90	1.45
	27	5x5.4	0.20	170	0.70
	33	5x5.4	0.20	170	0.70
	47	6.3x5.4	0.20	250	0.39
	56	6.3x5.4	0.20	250	0.39
	68	6.3x5.4	0.20	250	0.39
	100	6.3x5.4	0.20	250	0.39
	150	6.3x5.4	0.20	250	0.39
	220	6.3x7.7	0.20	300	0.30
	330	8x10.2	0.24	600	0.15
	470	8x10.2	0.24	600	0.15
	680	10x10.2	0.24	850	0.08
	1000	10x10.2	0.24	850	0.08
16(20)	15	4x5.4	0.16	90	1.45
	22	5x5.4	0.16	170	0.70
	27	5x5.4	0.16	150	0.76
	33	6.3x5.4	0.16	250	0.44
	47	6.3x5.4	0.16	250	0.39
	56	6.3x5.4	0.16	250	0.39
	68	6.3x5.4	0.16	250	0.39
	100	6.3x5.4	0.16	250	0.39
	150	6.3x7.7	0.16	300	0.30
	220	6.3x7.7	0.16	300	0.30
	330	8x10.2	0.20	600	0.15
	470	8x10.2	0.20	600	0.15
	680	10x10.2	0.20	850	0.08

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃ 100KHz)	Impedance (Ω,20℃) (100KHz)
25(32)	10	4x5.4	0.14	90	1.45
	15	5x5.4	0.14	170	0.70
	22	5x5.4	0.14	170	0.70
	27	6.3x5.4	0.14	250	0.39
	33	6.3x5.4	0.14	250	0.44
	47	6.3x5.4	0.14	250	0.39
	56	6.3x5.4	0.14	250	0.39
	68	6.3x5.4	0.14	250	0.39
	100	6.3x7.7	0.14	300	0.30
	150	8x10.2	0.16	600	0.15
	220	8x10.2	0.16	600	0.15
	330	8x10.2	0.16	600	0.15
	470	10x10.2	0.16	850	0.08
35(44)	4.7	4x5.4	0.12	90	1.45
	10	5x5.4	0.12	170	0.70
	15	5x5.4	0.12	170	0.70
	22	5x5.4	0.12	170	0.70
	27	6.3x5.4	0.12	250	0.39
	33	6.3x5.4	0.12	250	0.39
	47	6.3x5.4	0.12	250	0.39
	56	6.3x7.7	0.12	300	0.30
	68	6.3x7.7	0.12	300	0.30
	100	8x10.2	0.14	600	0.15
	150	8x10.2	0.14	600	0.15
	220	8x10.2	0.14	600	0.15
	330	10x10.2	0.14	850	0.08
50(63)	4.7	4x5.4	0.12	64	2.55
	10	6.3x5.4	0.12	215	0.52
	15	6.3x5.4	0.12	215	0.52
	22	6.3x5.4	0.12	215	0.52
	27	6.3x7.7	0.12	243	0.44
	33	6.3x7.7	0.12	243	0.44
	47	6.3x7.7	0.12	243	0.44
	56	8x10.2	0.14	400	0.22
	68	8x10.2	0.14	400	0.22
	100	8x10.2	0.14	400	0.22
	150	10x10.2	0.14	585	0.13
	220	10x10.2	0.14	585	0.13

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

JAMICON Surface Mount Aluminium Electrolytic Capacitors TEAPO

Jamicon Series：CL

Teapo Series：YV Low Impedance Series





Jamicon Teapo

■ Endurance:105℃, 1000~2000 hours

■Recommended Applications: Suitable for AV(TV,Video,Audio),Monitor/Computer, Battery charger,DC/DC converter,SM

■ Corresponding product to RoHS

■ AEC-Q200 compliant : Please contact Jamicon for more details, test data, information

■ Specifications

Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	6.3~ 50VDC
Rated Capacitance Range	1 ~ 1500μF
Capacitance Tolerance	± 20 % at 120Hz , 20℃
Leakage Current (20℃)	I≦0.01CV or 3μA ,whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	Shown in the table of standard rating

Low Temperature Stability Impedance Ratio (MAX)

WV / Z(120HZ)	6.3	10	16	25	35	50
Z(-25℃) / Z(20℃)	2	2	2	2	2	2
Z(-40℃) / Z(20℃)	4	4	3	3	3	3

Endurance


After applying rated voltage for 1000~2000hrs at 105℃,Stay back to 20 ℃ temperature measurement,the capacitors shall meet the following requirements.

Capacitance Change	6.3VF Within ±30% of the initial value,10-50VFWithin ±20% of the initial value
Dissipation Factor	Not more than 200% of the specified value
Leakage Current	Not more than the specified value


DΦ	4x5.4~6.3x7.7	8x10.2~10x10.2
Life	1000hrs	2000hrs

Shelf Life: The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■MARKING

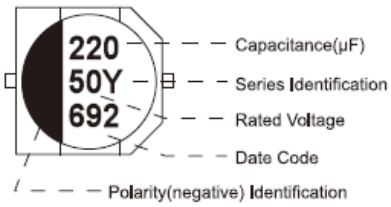


Teapo

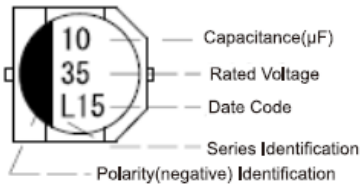

Jamicon

■Dimensions [mm]

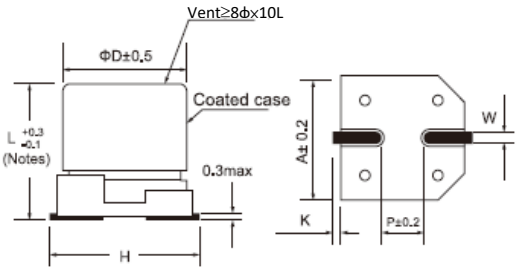

(Notes) Φ8 ~ Φ10&6.3X7.7=L±0.3

Dimensions	ΦD	L	A	H	W	P	K
B01	4.0	5.4	4.3	5.5 Max	0.65±0.1	1.0	0.35+0.15/-0.2
C01	5.0	5.4	5.3	6.5 Max	0.65±0.1	1.5	0.35+0.15/-0.2
E01	6.3	5.4	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2
E04	6.3	7.7	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2
G03	8.0	10.2	8.3	10.0 Max	0.90±0.2	3.1	0.70±0.20
H03	10.0	10.2	10.3	12.0 Max	0.90±0.2	4.6	0.70±0.20

■ Multiplier for Ripple Current

Frequency (Hz)	120	1K	10K	100K
Coefficient	0.70	0.80	0.90	1.00

Jamicon Series：CL

Teapo Series：YV

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃ 100KHz)	Impedance (Ω,20℃) (100KHz)
6.3(8)	22	4x5.4	0.26	60	3.0
	33	5x5.4	0.26	95	1.8
	47	5x5.4	0.26	95	1.8
	100	6.3x5.4	0.26	140	1.0
	220	6.3x5.4	0.26	140	1.0
	330	6.3x7.7	0.26	280	0.34
	470	8x10.2	0.35	450	0.3
	680	8x10.2	0.35	450	0.3
	1000	8x10.2	0.35	450	0.3
	1500	10x10.2	0.35	670	0.15
10(13)	22	5x5.4	0.22	95	1.8
	33	5x5.4	0.22	95	1.8
	47	6.3x5.4	0.22	140	1.0
	100	6.3x5.4	0.22	140	1.0
	220	6.3x7.7	0.22	280	0.34
	330	8x10.2	0.26	450	0.3
	470	8x10.2	0.26	450	0.3
	680	10x10.2	0.26	670	0.15
	1000	10x10.2	0.26	670	0.15
16(20)	10	4X5.4	0.16	60	3.0
	22	5X5.4	0.16	95	1.8
	33	6.3x5.4	0.16	140	1.0
	47	6.3x5.4	0.16	140	1.0
	100	6.3x5.4	0.16	140	1.0
	220	6.3x7.7	0.16	280	0.34
	330	8x10.2	0.20	450	0.3
	470	8x10.2	0.20	450	0.3
	680	10x10.2	0.20	670	0.15
25(32)	10	5x5.4	0.14	95	1.8

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃ 100KHz)	Impedance (Ω,20℃) (100KHz)
25(32)	22	6.3x5.4	0.14	140	1.0
	33	6.3x5.4	0.14	140	1.0
	47	6.3x5.4	0.14	140	1.0
	68	6.3x7.7	0.14	280	0.34
	100	6.3x7.7	0.14	280	0.34
	220	8x10.2	0.16	450	0.3
	330	8x10.2	0.16	450	0.3
	470	10x0.2	0.16	670	0.15
35(44)	4.7	4x5.4	0.12	60	3.0
	10	5x5.4	0.12	95	1.8
	22	6.3x5.4	0.12	140	1.0
	33	6.3x5.4	0.12	140	1.0
	47	6.3x5.4	0.12	140	1.0
	68	6.3x7.7	0.12	280	0.34
	100	8x10.2	0.14	450	0.3
	220	8x10.2	0.14	450	0.3
	330	10x10.2	0.14	670	0.15
50(63)	1	4x5.4	0.12	30	5.0
	2.2	4x5.4	0.12	30	5.0
	3.3	4x5.4	0.12	30	5.0
	4.7	5x5.4	0.12	50	3.0
	10	6.3x5.4	0.12	70	2.0
	22	6.3x5.4	0.12	70	2.0
	33	6.3x7.7	0.12	170	1.3
	47	6.3x7.7	0.12	170	1.3
	68	8x10.2	0.12	300	0.6
	100	8x10.2	0.12	300	0.6
	220	10x10.2	0.12	500	0.3

Jamicon Series：CE
Teapo Series：MV Low leakage current Series



Jamicon



Teapo

- Endurance:105℃ 2000 hours
- Recommended Applications:Low leakage current (0.5 μA to 2.0 μA max.)
- Corresponding product to RoHS
- AEC-Q200 compliant : Please contact Jamicon for more details, test data, information

Specifications

Item	Characteristics
Category Temperature Range	-40~ +105℃
Rated Voltage Range	6.3 ~ 50VDC
Rated Capacitance Range	1~ 100 μF
Capacitance Tolerance	± 20 % at 120Hz , 20℃
Leakage Current (20℃)	I≦0.002CV or 0.5 μA ,whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	Shown in the table of standard rating
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120HZ)

WV / Z(120HZ)	6.3	10	25	35	50
Z(-25℃) / Z(20℃)	4	3	2	2	2
Z(-40℃) / Z(20℃)	8	6	4	3	3

Endurance


After applying rated voltage for 2000Hrs at 105℃,Stay back to 20 ℃ temperature measurement,the capacitors shall meet the following requirements.

Capacitance Change	Within ±25% of the initial value
Dissipation Factor	Not more than 200% of the specified value
Leakage Current	Not more than the specified value


Shelf Life

The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

MARKING

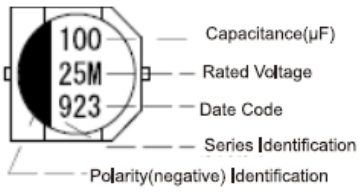


Teapo

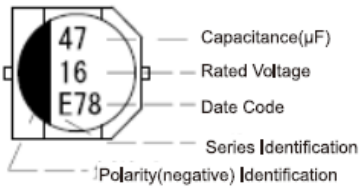

Jamicon

Dimensions [mm]

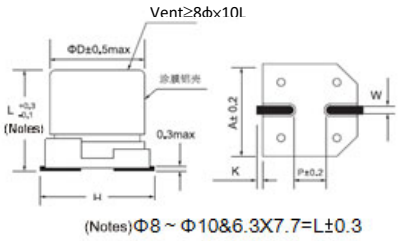

(Notes)Φ8 ~ Φ10&6.3X7.7=L±0.3

Dimensions	ΦD	L	A	H	W	P	K
B01	4.0	5.4	4.3	5.5 Max	0.65±0.1	1.0	0.35+0.15/-0.2
C01	5.0	5.4	5.3	6.5 Max	0.65±0.1	1.5	0.35+0.15/-0.2
E01	6.3	5.4	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2

Multiplier for Ripple Current

Frequency (Hz)	60	120	1K	10K
Coefficient	0.85	1.00	1.10	1.20

Jamicon Series：CE

Teapo Series：MV

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃) (120Hz)
6.3(8)	22	4x5.4	0.24	24
	33	5x5.4	0.24	33
	47	5x5.4	0.24	39
	100	6.3x5.4	0.24	65
10(13)	22	5x5.4	0.20	30
	33	5x5.4	0.20	36
	47	6.3x5.4	0.20	50
	100	6.3x5.4	0.20	70
16(20)	10	4x5.4	0.16	20
	22	5x5.4	0.16	33
	33	6.3x5.4	0.16	46
	47	6.3x5.4	0.16	55

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃) (120Hz)
25(32)	4.7	4x5.4	0.14	14
	10	5x5.4	0.14	24
	22	6.3x5.4	0.14	41
	33	6.3x5.4	0.14	50
35(44)	4.7	4x5.4	0.12	15
	10	5x5.4	0.12	26
	22	6.3x5.4	0.12	44
50(63)	1.0	4x5.4	0.10	8
	2.2	4x5.4	0.10	12
	3.3	4x5.4	0.10	14
	4.7	5x5.4	0.10	19
	10	6.3x5.4	0.10	32

Jamicon Series：CF
Teapo Series：EV Ultra Low Impedance Series



Jamicon




Teapo

■ Endurance:105℃, 2000 hours
■Recommended Applications: Applying to media (TV, video, audio), monitor /computer, Communication Power industry, car, electricity meter industry, car, electricity meter
■Corresponding product to RoHS
■ AEC-Q200 compliant : Please contact Jamicon for more details, test data, information

■ Specifications

Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	6.3~ 50VDC
Rated Capacitance Range	4.7 ~ 1500 μF
Capacitance Tolerance	± 20 % at 120Hz , 20℃
Leakage Current (20℃)	I≦0.01CV or 3 μA ,whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	Shown in the table of standard rating
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120HZ): 6.3 / 10 / 16 / 25 / 35 / 50 Z(-25℃) / Z(20℃): 2 / 2 / 2 / 2 / 2 / 2 Z(-40℃) / Z(20℃): 3 / 3 / 3 / 3 / 3 / 3
Endurance	After applying rated voltage for 2000hrs at 105℃,Stay back to 20 ℃ temperature measurement,the capacitors shall meet the following requirements. Capacitance Change: Within ±30% of the initial value Dissipation Factor: Not more than 200% of the specified value Leakage Current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■MARKING




Jamicon



Teapo

■Dimensions [mm]

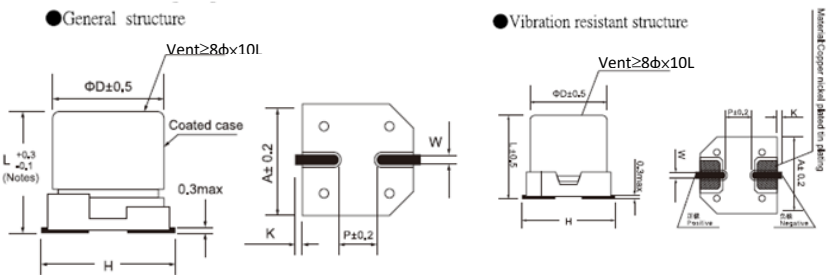

（注）Φ8～Φ10&6.3X7.7=L±0.3

Dimensions	ΦD	L	A	H	W	P	K
B01	4.0	5.4	4.3	5.5 Max	0.65±0.1	1.0	0.35+0.15/-0.2
C01	5.0	5.4	5.3	6.5 Max	0.65±0.1	1.5	0.35+0.15/-0.2
E01	6.3	5.4	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2
E04	6.3	7.7	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2
G03	8.0	10.2	8.3	10.0 Max	0.90±0.2	3.1	0.70±0.20
G02	8.0	6.2	8.3	9.5 Max	0.65±0.1	2.2	0.35+0.15/-0.2
H03	10.0	10.2	10.3	12.0 Max	0.90±0.2	4.6	0.70±0.20

■ Multiplier for Ripple Current

Frequency (Hz)	120	1K	10K	100K
Coefficient	0.70	0.80	0.90	1.00

Jamicon Series：CF

Teapo Series：EV

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃ 100KHz)	Impedance (Ω,20℃) (100KHz)
6.3(8)	22	4x5.4	0.26	90	1.80
	33	4x5.4	0.26	90	1.80
	47	4x5.4	0.26	90	1.80
		5x5.4	0.26	160	0.76
	100	5x5.4	0.26	160	0.76
		6.3x5.4	0.26	240	0.44
	150	6.3x5.4	0.26	240	0.44
		6.3x7.7	0.26	240	0.34
	220	6.3x5.4	0.26	240	0.44
		6.3x7.7	0.26	240	0.34
		8x6.2	0.26	240	0.34
	330	6.3x7.7	0.26	280	0.34
		8x6.2	0.26	290	0.34
	470	8x10.2	0.26	600	0.16
	680	8x10.2	0.26	600	0.16
	1000	8x10.2	0.26	600	0.16
	1500	10x10.2	0.26	850	0.08
10（13）	22	4x5.4	0.19	90	1.80
	33	4x5.4	0.19	90	1.80
		5x5.4	0.19	160	0.76
	47	6.3x5.4	0.19	190	0.44
	100	6.3x5.4	0.19	190	0.44
	150	6.3x5.4	0.19	200	0.44
		6.3x7.7	0.19	240	0.34
	220	6.3x7.7	0.19	280	0.34
		8x6.2	0.19	280	0.34
	330	8x10.2	0.19	600	0.16
	470	8x10.2	0.19	600	0.16
	680	10x10.2	0.19	600	0.09
	820	10x10.2	0.19	850	0.08
	1000	10x10.2	0.19	850	0.08
	1200	10x10.2	0.19	850	0.08
16（20）	3.3	4x5.4	0.16	60	1.80
	10	4x5.4	0.16	90	1.80
	22	4x5.4	0.16	90	1.80
		5x5.4	0.16	160	0.76
	33	5x5.4	0.16	160	1.00
	47	5x5.4	0.16	160	0.76
		6.3x5.4	0.16	240	0.44
	68	6.3x5.4	0.16	240	0.44
	100	6.3x5.4	0.16	240	0.44
		6.3x7.7	0.16	280	0.34
	150	6.3x7.7	0.16	280	0.34
	220	6.3x7.7	0.16	280	0.34
		8x6.2	0.16	280	0.34

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃ 100KHz)	Impedance (Ω,20℃) (100KHz)
16（20）	220	8x10.2	0.16	370	0.16
	330	8x10.2	0.16	600	0.16
	470	8x10.2	0.16	600	0.16
		10x10.2	0.16	650	0.09
	560	10x10.2	0.16	650	0.09
	680	10x10.2	0.16	850	0.08
25（32）	10	4x5.4	0.14	90	1.80
		5x5.4	0.14	95	1.80
	22	5x5.4	0.14	160	0.76
	33	5x5.4	0.14	160	1.00
		6.3x5.4	0.14	240	0.52
	47	6.3x5.4	0.14	240	0.44
		6.3x7.7	0.14	260	0.44
	68	6.3x5.4	0.14	240	0.34
	100	6.3x7.7	0.14	280	0.34
		8X6.2	0.14	280	0.34
	150	8x10.2	0.14	600	0.16
	220	8x10.2	0.14	600	0.16
	330	8x10.2	0.14	600	0.16
	470	10x10.2	0.14	850	0.08
35（44）	4.7	4x5.4	0.12	90	1.80
	10	4x5.4	0.12	90	1.80
		5x5.4	0.12	160	0.76
	22	5x5.4	0.12	160	0.76
		6.3x5.4	0.12	200	0.52
	33	6.3x5.4	0.12	240	0.52
	47	6.3x5.4	0.12	240	0.44
		6.3x7.7	0.12	280	0.34
	68	6.3x7.7	0.12	280	0.34
	100	6.3x7.7	0.12	280	0.34
		8x10.2	0.12	600	0.16
	150	8x10.2	0.12	600	0.16
	220	8x10.2	0.12	600	0.16
	330	10x10.2	0.12	850	0.08
50（63）	10	5X5.4	0.12	120	1.52
		6.3x5.4	0.12	165	0.88
	22	6.3x5.4	0.12	165	0.88
	33	6.3x7.7	0.12	185	0.68
	47	6.3x7.7	0.12	185	0.68
		8X6.2	0.12	185	0.68
	100	8x10.2	0.12	300	0.34
		10x10.2	0.12	670	0.18
	150	10x10.2	0.12	670	0.18
	220	10x10.2	0.12	670	0.18

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：CX

Teapo Series：TV Large capacitance with ultra low impedance capacitors




■ Endurance:105℃, 2000 hours
■ Designed for surface mounting on high density PC board
■ Corresponding product to RoHS
■ AEC-Q200 compliant : Please contact Jamicon for more details, test data, information


■ Specifications

Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	6.3~ 50VDC
Rated Capacitance Range	10 ~ 2200μF
Capacitance Tolerance	± 20 % at 120Hz , 20℃
Leakage Current (20℃)	I≦0.01CV or 3μA ,whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	Shown in the table of standard rating
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120HZ): 6.3 / 10 / 16 / 25 / 35 / 50 Z(-25℃) / Z(20℃): 4 / 3 / 2 / 2 / 2 / 2 Z(-55℃) / Z(20℃): 8 / 5 / 4 / 3 / 3 / 3
Endurance	After applying rated voltage for 2000hrs at 105℃,Stay back to 20 ℃ temperature measurement,the capacitors shall meet the following requirements. Capacitance Change: Within ±30% of the initial value Dissipation Factor: Not more than 200% of the specified value Leakage Current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■MARKING

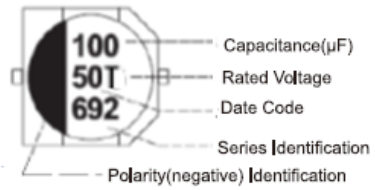


Teapo

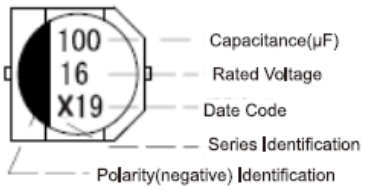

Jamicon

■Dimensions [mm]

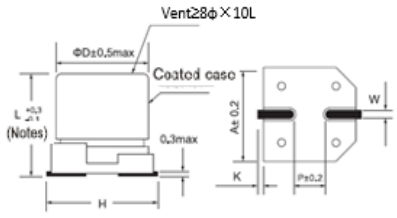

(Notes) Φ8～Φ10&6.3X7.7=L±0.3

Dimensions	ΦD	L	A	H	W	P	K
E08	6.3	5.8	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2
E04	6.3	7.7	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2
G03	8.0	10.2	8.3	10.0 Max	0.90±0.2	3.1	0.70±0.20
H03	10.0	10.2	10.3	12.0 Max	0.90±0.2	4.6	0.70±0.20

■ Multiplier for Ripple Current

Frequency (Hz)	50,60	120	1K	100K
≦ 470	0.50	0.65	0.85	1.00
680~2200	0.55	0.70	0.90	1.00

Jamicon Series：CX

Teapo Series：TV

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃ 100KHz)	Impedance (Ω,20℃) (100KHz)
6.3(8)	100	6.3x5.8	0.26	300	0.26
	220	6.3x5.8	0.26	300	0.26
	330	6.3x5.8	0.26	300	0.26
	470	6.3x7.7	0.26	600	0.16
		8x10.2	0.26	850	0.08
	680	6.3x7.7	0.26	600	0.16
	1000	8x10.2	0.26	850	0.08
	1500	8x10.2	0.26	850	0.08
		10x10.2	0.26	1190	0.06
	2200	10x10.2	0.28	1190	0.06
10(13)	150	6.3x5.8	0.19	300	0.26
	220	6.3x5.8	0.19	300	0.26
	330	6.3x7.7	0.19	600	0.16
		8x10.2	0.19	850	0.08
	470	6.3x7.7	0.19	600	0.16
		8x10.2	0.19	850	0.08
	680	8x10.2	0.19	850	0.08
	1000	8x10.2	0.19	850	0.08
		10x10.2	0.19	1190	0.06
	1500	10x10.2	0.19	1190	0.06
16(20)	100	6.3x5.8	0.16	300	0.26
		6.3x7.7	0.16	600	0.16
	150	6.3x5.8	0.16	300	0.26
		6.3x7.7	0.16	600	0.16
	220	6.3x5.8	0.16	300	0.26
		6.3x7.7	0.16	600	0.16
	330	6.3x7.7	0.16	600	0.16
		8x10.2	0.16	850	0.08
	470	8x10.2	0.16	850	0.08
	680	8x10.2	0.16	850	0.08
		10x10.2	0.16	1190	0.06
	1000	10x10.2	0.16	1190	0.06

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃ 100KHz)	Impedance (Ω,20℃) (100KHz)
25(32)	100	6.3x5.8	0.14	300	0.26
		6.3x7.7	0.14	600	0.16
	150	6.3x7.7	0.14	600	0.16
		8x10.2	0.14	850	0.08
	220	6.3x7.7	0.14	600	0.16
		8x10.2	0.14	850	0.08
	330	8x10.2	0.14	850	0.08
	470	8x10.2	0.14	850	0.08
		10x10.2	0.14	1190	0.06
	820	10x10.2	0.14	1190	0.06
	1000	10x10.2	0.14	1190	0.06
35(44)	47	6.3x5.8	0.12	300	0.26
	68	6.3x5.8	0.12	300	0.26
		6.3x7.7	0.12	600	0.16
	100	6.3x5.8	0.12	300	0.26
		6.3x7.7	0.12	600	0.16
	150	6.3x7.7	0.12	600	0.16
		8x10.2	0.12	850	0.08
	220	8x10.2	0.12	850	0.08
	330	8x10.2	0.12	850	0.08
		10x10.2	0.12	1190	0.06
	470	10x10.2	0.12	1190	0.06
	560	10x10.2	0.12	1190	0.06
50(63)	47	6.3x5.8	0.10	195	0.68
	100	6.3x7.7	0.10	350	0.34
	100	8x10.2	0.10	680	0.18
	220	8x10.2	0.10	680	0.18
		10x10.2	0.10	900	0.12
	330	10x10.2	0.10	900	0.12

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

JAMICON Surface Mount Aluminium Electrolytic Capacitors TEAPO

Jamicon Series：CD

Teapo Series：LV Low Impedance,long life Series



Jamicon



Teapo

■ Endurance:105℃, 2000~5000 hours

■Recommended Applications: Suitable for AV(TV,Video,Audio),Monitor/Computer, Battery charger,DC/DC converter,SMPS,Noise filter

■ Corresponding product to RoHS

■ AEC-Q200 compliant : Please contact Jamicon for more details, test data, information

■ Specifications

Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	6.3~ 50VDC
Rated Capacitance Range	4.7 ~ 1500μF
Capacitance Tolerance	± 20 % at 120Hz , 20℃
Leakage Current (20℃)	I≦0.01CV or 3μA ,whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	Shown in the table of standard rating

Low Temperature Stability Impedance Ratio (MAX)

WV / Z(120HZ)	6.3	10	16	25	35	50
Z(-25℃) / Z(20℃)	3	3	2	2	2	2
Z(-55℃) / Z(20℃)	7	7	5	3	3	3

Endurance


After applying rated voltage for 2000~5000hrs at 105℃,Stay back to 20 ℃ temperature measurement,the capacitors shall meet the following requirements.

Capacitance Change	Within ±30% of the initial value
Dissipation Factor	Not more than 300% of the specified value
Leakage Current	Not more than the specified value


DΦ	5x5.4~6.3x7.7	8x10.2~10x10.2
Life	2000hrs	5000hrs

Shelf Life: The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■MARKING

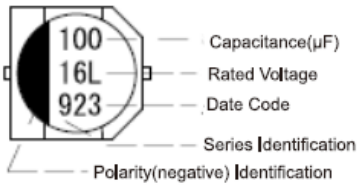


Teapo

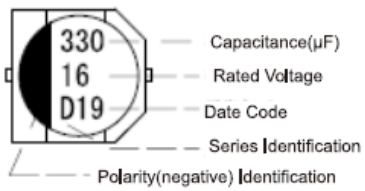

Jamicon

■Dimensions [mm]

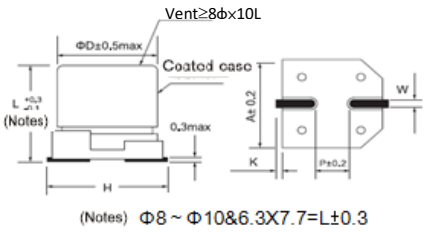

(Notes) Φ8～Φ10&6.3X7.7=L±0.3

Dimensions	ΦD	L	A	H	W	P	K
B01	4.0	5.4	4.3	5.5 Max	0.65±0.1	1.0	0.35+0.15/-0.2
C01	5.0	5.4	5.3	6.5 Max	0.65±0.1	1.5	0.35+0.15/-0.2
E01	6.3	5.4	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2
E04	6.3	7.7	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2
G03	8.0	10.2	8.3	10.0 Max	0.90±0.2	3.1	0.70±0.20
H03	10.0	10.2	10.3	12.0 Max	0.90±0.2	4.6	0.70±0.20

■ Multiplier for Ripple Current

Frequency (Hz)	120	1K	10K	100K
Coefficient	0.70	0.80	0.90	1.00

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：CD

Teapo Series：LV

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃ 100KHz)	Impedance (Ω,20℃) (100KHz)
6.3(8)	33	5x5.4	0.28	150	0.76
	47	5x5.4	0.28	150	0.76
	100	6.3x5.4	0.28	230	0.44
	150	6.3x5.4	0.28	230	0.44
	220	6.3x5.4	0.28	230	0.44
	330	6.3x7.7	0.28	280	0.34
	470	8x10.2	0.28	450	0.17
	1000	8x10.2	0.28	450	0.17
	1500	10x10.2	0.28	670	0.09
10(13)	33	5x5.4	0.24	150	0.76
	47	6.3x5.4	0.24	230	0.44
	100	6.3x5.4	0.24	230	0.44
	150	6.3x5.4	0.24	230	0.44
	220	6.3x7.7	0.24	280	0.34
	330	8x10.2	0.24	450	0.17
	470	8x10.2	0.24	450	0.17
	1000	10x10.2	0.24	670	0.09
16(20)	22	5x5.4	0.20	150	1.00
	33	6.3x5.4	0.20	230	0.44
	47	6.3x5.4	0.20	230	0.44
	100	6.3x5.4	0.20	230	0.44
	150	6.3x7.7	0.20	280	0.34
	220	6.3x7.7	0.20	280	0.34
	330	8x10.2	0.20	450	0.17
	470	8x10.2	0.20	450	0.17

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃ 100KHz)	Impedance (Ω,20℃) (100KHz)
25(32)	22	5x5.4	0.16	150	1.00
	33	6.3x5.4	0.16	230	0.44
	47	6.3x5.4	0.16	230	0.44
	100	6.3x7.7	0.16	280	0.34
	150	8x10.2	0.16	450	0.17
	220	8x10.2	0.16	450	0.17
	330	8x10.2	0.16	450	0.17
	470	10x10.2	0.16	670	0.09
35(44)	10	5x5.4	0.13	150	0.76
	22	5x5.4	0.13	150	0.76
	33	6.3x5.4	0.13	230	0.44
	47	6.3x5.4	0.13	230	0.44
	100	8x10.2	0.13	450	0.17
	150	8x10.2	0.13	450	0.17
	220	8x10.2	0.13	450	0.17
	330	10x10.2	0.13	670	0.09
50(63)	4.7	5x5.4	0.12	85	1.52
	10	6.3x5.4	0.12	165	0.88
	22	6.3x5.4	0.12	165	0.88
	33	6.3x7.7	0.12	185	0.68
	47	6.3x7.7	0.12	185	0.68
	100	8x10.2	0.12	300	0.34
	150	10x10.2	0.12	670	0.18
	220	10x10.2	0.12	670	0.18

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

JAMICON Surface Mount Aluminium Electrolytic Capacitors TEAPO

Jamicon Series：CU
Teapo Series：WV Long Life Series



Jamicon




Teapo

■ Endurance:105℃, 3000~5000 hours
■Recommended Applications: Suitable for AV(TV,Video,Audio),Monitor/Computer, Home appliance, OA/HA/Communication,Industrial, Automobile, Meter.
■ Corresponding product to RoHS
■ AEC-Q200 compliant : Please contact Jamicon for more details, test data, information


■ Specifications

Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	6.3~ 50VDC
Rated Capacitance Range	1 ~ 1000 μF
Capacitance Tolerance	± 20 % at 120Hz , 20℃
Leakage Current (20℃)	I≦0.01CV or 3 μA ,whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	Shown in the table of standard rating
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120HZ) 6.3 10 16 25 35 50 Z(-25℃) / Z(20℃) 4 3 2 2 2 2 Z(-55℃) / Z(20℃) 10 7 5 3 3 3
Endurance	After applying rated voltage for 3000~5000hrs at 105℃,Stay back to 20 ℃ temperature measurement,the capacitors shall meet the following requirements.
	Capacitance Change: Within ±30% of the initial value
	Dissipation Factor: Not more than 200% of the specified value
	Leakage Current: Not more than the specified value
	DΦ: 4x5.4~6.3x7.7 / 8x10.2~10x10.2
	Life: 3000hrs / 5000hrs
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■MARKING

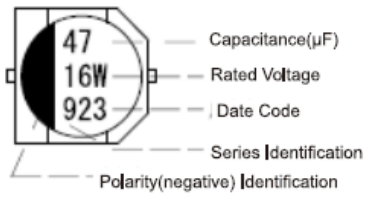


Teapo

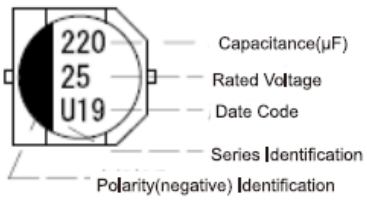

Jamicon

■Dimensions [mm]

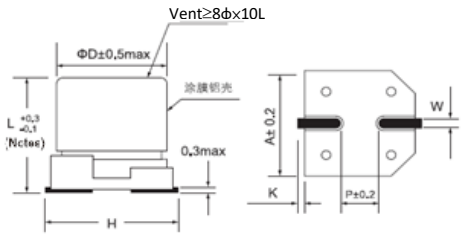

(Notes) Φ8 ~ Φ10&6.3X7.7=L±0.3

Dimensions	ΦD	L	A	H	W	P	K
B01	4.0	5.4	4.3	5.5 Max	0.65±0.1	1.0	0.35+0.15/-0.2
C01	5.0	5.4	5.3	6.5 Max	0.65±0.1	1.5	0.35+0.15/-0.2
E01	6.3	5.4	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2
E04	6.3	7.7	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2
G02	8.0	6.2	8.3	9.5 Max	0.65±0.1	2.2	0.35+0.15/-0.2
G03	8.0	10.2	8.3	10.0 Max	0.90±0.2	3.1	0.70±0.20
H03	10.0	10.2	10.3	12.0 Max	0.90±0.2	4.6	0.70±0.20

■ Multiplier for Ripple Current

Frequency (Hz)	60	120	1K	10K
Coefficient	0.85	1.00	1.15	1.25

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：CU

Teapo Series：WV

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃ 120KHz)
6.3（8）	22	4x5.4	0.28	23
	33	5x5.4	0.28	31
	47	5x5.4	0.28	38
	100	6.3x5.4	0.28	65
	220	6.3x7.7	0.28	120
	330	8x10.2	0.28	190
	470	10x10.2	0.28	260
	1000	10x10.2	0.28	380
10（13）	22	5x5.4	0.24	28
	33	5x5.4	0.24	34
	47	6.3x5.4	0.24	47
	100	6.3x7.7	0.24	85
	220	8x10.2	0.24	170
	330	10x10.2	0.24	230
	470	10x10.2	0.24	280
16（20）	10	4x5.4	0.20	18
	22	5x5.4	0.20	30
	33	6.3x5.4	0.20	43
	47	6.3x5.4	0.20	50
	100	6.3x7.7	0.20	95
	220	10x10.2	0.20	210
	330	10x10.2	0.20	260
	470	10x10.2	0.20	330

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃ 120KHz)
25（32）	10	5x5.4	0.16	23
	22	6.3x5.4	0.16	39
	33	6.3x5.4	0.16	48
	47	6.3x7.7	0.16	75
	100	8x10.2	0.16	140
	220	10x10.2	0.16	230
	330	10x10.2	0.16	290
35（44）	4.7	4x5.4	0.13	17
	10	5x5.4	0.13	25
	22	6.3x5.4	0.13	43
	33	6.3x7.7	0.13	70
	47	8x10.2	0.13	100
	100	10x10.2	0.13	170
	220	10x10.2	0.13	260
50（63）	1.0	4x5.4	0.12	7
	2.2	4x5.4	0.12	11
	3.3	4x5.4	0.12	13
	4.7	5x5.4	0.12	18
	10	6.3x5.4	0.12	30
	22	6.3x7.7	0.12	60
	33	8x10.2	0.12	90
	47	8x10.2	0.12	120
	100	10x10.2	0.12	180

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：CZ
Teapo Series：XV

Ultra Low Impedance & Long Life Series



Jamicon



Teapo

■ Endurance:105℃, 3000~5000 hours

■Recommended Applications: Suitable for AV(TV,Video,Audio),Monitor/Computer, Home appliance, OA/HA/Communication,Industrial, Automobile, Meter.

■ Corresponding product to RoHS

■ AEC-Q200 compliant : Please contact Jamicon for more details, test data, information

■ Specifications

Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	6.3~ 50VDC
Rated Capacitance Range	1 ~ 1000 μF
Capacitance Tolerance	± 20 % at 120Hz , 20℃
Leakage Current (20℃)	I≦0.01CV or 3 μA ,whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	Shown in the table of standard rating

Low Temperature Stability Impedance Ratio (MAX)

WV / Z(120HZ)	6.3	10	16	25	35	50
Z(-25℃) / Z(20℃)	2	2	2	2	2	2
Z(-40℃) / Z(20℃)	3	3	3	3	3	3

Endurance


After applying rated voltage for 3000~5000hrs at 105℃,Stay back to 20 ℃ temperature measurement,the capacitors shall meet the following requirements.

Capacitance Change	Within ±30% of the initial value	
Dissipation Factor	Not more than 200% of the specified value	
Leakage Current	Not more than the specified value	
DΦ	4x5.4~6.3x7.7	8x10.2~10x10.2
Life	3000hrs	5000hrs


Shelf Life

The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■MARKING




Jamicon



Teapo

■Dimensions [mm]

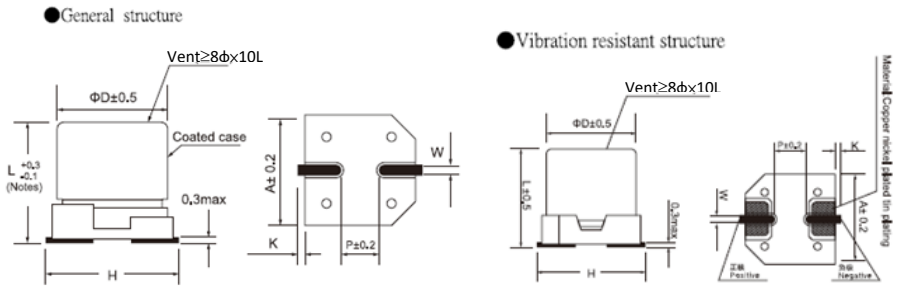

(Notes) Φ8 ~ Φ10&6.3X7.7=L±0.3

Dimensions	ΦD	L	A	H	W	P	K
B01	4.0	5.4	4.3	5.5 Max	0.65±0.1	1.0	0.35+0.15/-0.2
C01	5.0	5.4	5.3	6.5 Max	0.65±0.1	1.5	0.35+0.15/-0.2
E01	6.3	5.4	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2
E04	6.3	7.7	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2
G02	8.0	6.2	8.3	9.5 Max	0.65±0.1	2.2	0.35+0.15/-0.2
G03	8.0	10.2	8.3	10.0 Max	0.90±0.2	3.1	0.70±0.20
H03	10.0	10.2	10.3	12.0 Max	0.90±0.2	4.6	0.70±0.20

■ Multiplier for Ripple Current

Frequency (Hz)	120	1K	10K	100K
Coefficient	0.70	0.80	0.90	1.00

Jamicon Series：CZ

Teapo Series：XV

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃ 100KHz)	Impedance (Ω,20℃) (100KHz)
6.3（8）	22	4x5.4	0.26	90	1.93
	33	4x5.4	0.26	90	1.93
	47	5x5.4	0.26	160	1.00
	100	6.3x5.4	0.26	240	0.52
	150	6.3x7.7	0.26	240	0.30
	220	6.3x5.4	0.26	240	0.52
		6.3x7.7	0.26	240	0.30
		8x10.2	0.26	600	0.26
	330	8x10.2	0.26	600	0.16
	470	8x10.2	0.26	600	0.16
	680	10x10.2	0.26	850	0.12
	1000	10x10.2	0.26	850	0.12
10（13）	22	4x5.4	0.19	90	1.93
	33	5x5.4	0.19	160	1.00
	47	6.3x5.4	0.19	190	0.52
	100	6.3x5.4	0.19	190	0.52
		6.3x7.7	0.19	190	0.52
	150	6.3x5.4	0.19	190	0.52
		6.3x7.7	0.19	240	0.34
	220	6.3x7.7	0.19	240	0.34
		8x6.2	0.19	240	0.34
		8x10.2	0.19	600	0.16
	330	8x10.2	0.19	600	0.16
	470	8x10.2	0.19	600	0.16
		10x10.2	0.19	850	0.12
	680	10x10.2	0.19	850	0.12
	1000	10x10.2	0.19	850	0.12
16（20）	10	4x5.4	0.16	90	1.93
	22	5x5.4	0.16	160	1.00
	33	6.3x5.4	0.16	240	0.52
	47	5x5.4	0.16	160	1.00
		6.3x5.4	0.16	240	0.52
	100	6.3x5.4	0.16	240	0.52
		6.3x7.7	0.16	280	0.34
		8x10.2	0.16	300	0.29
	150	6.3x7.7	0.16	280	0.34
		8x10.2	0.16	370	0.22
	220	8x10.2	0.16	370	0.22
	330	8x10.2	0.16	600	0.16
	470	8x10.2	0.16	600	0.16
		10x10.2	0.16	850	0.12
	680	10x10.2	0.16	850	0.12
25(32)	10	4x5.4	0.14	90	1.93
	22	5x5.4	0.14	160	1.00

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃ 100KHz)	Impedance (Ω,20℃) (100KHz)
25(32)	33	6.3x5.4	0.14	240	0.52
	47	6.3x5.4	0.14	240	0.52
	68	6.3x7.7	0.14	280	0.34
	100	6.3x7.7	0.14	280	0.34
	150	8x10.2	0.14	600	0.16
	220	8x10.2	0.14	600	0.16
	330	10x10.2	0.14	850	0.12
	470	10x10.2	0.14	850	0.12
35（44）	4.7	4x5.4	0.12	90	1.93
	10	5x5.4	0.12	160	1.00
	15	5x5.4	0.12	160	1.00
	22	5x5.4	0.12	160	1.00
	33	6.3x5.4	0.12	240	0.52
	47	6.3x5.4	0.12	240	0.52
		6.3x7.7	0.12	280	0.34
		8x6.2	0.12	280	0.34
		8x10.2	0.12	280	0.34
	68	6.3x7.7	0.12	280	0.34
	100	6.3x7.7	0.12	280	0.34
		8x10.2	0.12	600	0.16
		10x10.2	0.12	670	0.16
	150	8x10.2	0.12	600	0.16
		10x10.2	0.12	850	0.12
	220	8x10.2	0.12	600	0.16
		10x10.2	0.12	850	0.12
	330	10x10.2	0.12	850	0.12
50（63）	1.0	4x5.4	0.12	60	5.00
	2.2	4x5.4	0.12	60	5.00
	3.3	4x5.4	0.12	60	5.00
	4.7	5x5.4	0.12	95	4.00
	10	6.3x5.4	0.12	140	2.00
	22	6.3x5.4	0.12	140	2.00
		6.3x7.7	0.12	230	1.30
	33	8x10.2	0.12	350	0.34
	47	6.3x7.7	0.12	230	1.30
		8x10.2	0.12	350	0.34
		10x10.2	0.12	670	0.18
	68	8x10.2	0.12	350	0.34
		10x10.2	0.12	670	0.18
	100	8x10.2	0.12	350	0.34
		10x10.2	0.12	670	0.18
	150	10x10.2	0.12	670	0.18
	220	10x10.2	0.12	670	0.18

Jamicon Series：CA
Teapo Series：CV Low leakage current Series



Jamicon




Teapo

■ Endurance:85℃ 2000 hours
■Recommended Applications:Low leakage current (0.5 μA to 2.0 μA max.)
■ Corresponding product to RoHS
■ AEC-Q200 compliant : Please contact Jamicon for more details, test data, information


■ Specifications

Item	Characteristics
Category Temperature Range	-40~ +85℃
Rated Voltage Range	6.3 ~ 50VDC
Rated Capacitance Range	1~ 100 μF
Capacitance Tolerance	± 20 % at 120Hz , 20℃
Leakage Current (20℃)	I≦0.002CV or 0.5 μA ,whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	Shown in the table of standard rating
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120HZ): 6.3 / 10 / 25 / 35 / 50 Z(-25℃) / Z(20℃): 4 / 3 / 2 / 2 / 2 Z(-40℃) / Z(20℃): 8 / 6 / 4 / 3 / 3
Endurance	After applying rated voltage for 2000Hrs at 85℃,Stay back to 20 ℃ temperature measurement,the capacitors shall meet the following requirements. Capacitance Change: Within ±25% of the initial value Dissipation Factor: Not more than 200% of the specified value Leakage Current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 85℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■MARKING




Teapo



Jamicon

■ Dimensions [mm]

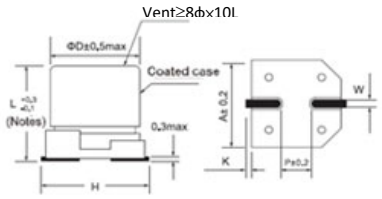

(Noteo) Φ8 ~ Φ10&6.3X7.7=L±0.3

Dimensions	ΦD	L	A	H	W	P	K
B01	4.0	5.4	4.3	5.5 Max	0.65±0.1	1.0	0.35+0.15/-0.2
C01	5.0	5.4	5.3	6.5 Max	0.65±0.1	1.5	0.35+0.15/-0.2
E01	6.3	5.4	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2

■ Multiplier for Ripple Current

Frequency (Hz)	60	120	1K	10K
Coefficient	0.85	1.00	1.10	1.20

Jamicon Series：CA
Teapo Series：CV

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃) (120Hz)
6.3(8)	22	4x5.4	0.24	31
	33	5x5.4	0.24	39
	47	5x5.4	0.24	47
	100	6.3x5.4	0.24	71
10(13)	22	5x5.4	0.20	35
	33	5x5.4	0.20	43
	47	6.3x5.4	0.20	59
	100	6.3x5.4	0.20	76
16(20)	10	4x5.4	0.16	25
	22	5x5.4	0.16	39
	33	6.3x5.4	0.16	57
	47	6.3x5.4	0.16	68

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃) (120Hz)
25(32)	4.7	4x5.4	0.14	19
	10	5x5.4	0.14	28
	22	6.3x5.4	0.14	52
	33	6.3x5.4	0.14	63
35(44)	4.7	4x5.4	0.12	20
	10	5x5.4	0.12	30
	22	6.3x5.4	0.12	54
50(63)	1.0	4x5.4	0.10	10
	2.2	4x5.4	0.10	15
	3.3	4x5.4	0.10	18
	4.7	5x5.4	0.10	23
	10	6.3x5.4	0.10	34

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

JAMICON Surface Mount Aluminium Electrolytic Capacitors TEAPO

Jamicon Series：CN
Teapo Series：RV

Non-polar Series



Jamicon




Teapo

■ Endurance:85℃ 2000 hours
■Recommended Applications:Non-polarized,Low profile vertical chip, 5.5mm height (≦ Φ6.3)
■ Corresponding product to RoHS
■ AEC-Q200 compliant : Please contact Jamicon for more details, test data, information


■ Specifications

Item	Characteristics
Category Temperature Range	-40~ +85℃
Rated Voltage Range	6.3 ~ 50VDC
Rated Capacitance Range	1~ 47 μF
Capacitance Tolerance	± 20 % at 120Hz , 20℃
Leakage Current (20℃)	I≦0.05CV or 10 μA ,whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	Shown in the table of standard rating
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120HZ) — 6.3 / 10 / 25 / 35 / 50 Z(-25℃) / Z(20℃) — 4 / 3 / 2 / 2 / 2 Z(-40℃) / Z(20℃) — 8 / 6 / 4 / 3 / 3
Endurance	After applying rated voltage for 2000Hrs at 85℃,Stay back to 20 ℃ temperature measurement,the capacitors shall meet the following requirements.(The polarity need to exchange every 250 hours) Capacitance Change — Within ±25% of the initial value Dissipation Factor — Not more than 200% of the specified value Leakage Current — Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■MARKING




Teapo

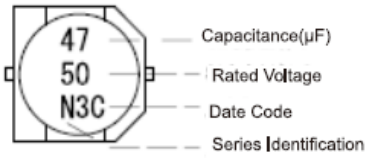

Jamicon

■ Dimensions [mm]

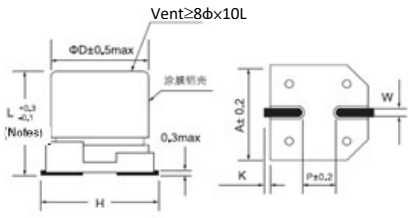

(Notes) Φ8 ~ Φ10&6.3X7.7=L±0.3

Dimensions	ΦD	L	A	H	W	P	K
B01	4.0	5.4	4.3	5.5 Max	0.65±0.1	1.0	0.35+0.15/-0.2
C01	5.0	5.4	5.3	6.5 Max	0.65±0.1	1.5	0.35+0.15/-0.2
E01	6.3	5.4	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2

■ Multiplier for Ripple Current

Frequency (Hz)	60	120	1K	10K
Coefficient	0.85	1.00	1.10	1.20

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：CN

Teapo Series：RV Non-polar Series

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 85℃) (120Hz)
6.3(8)	22	5x5.4	0.26	29
	33	6.3x5.4	0.26	41
	47	6.3x5.4	0.26	49
10(13)	10	4x5.4	0.22	19
	22	6.3x5.4	0.22	36
	33	6.3x5.4	0.22	45
16(20)	4.7	4x5.4	0.20	14
	10	5x5.4	0.20	23
	22	6.3x5.4	0.20	39
	33	6.3x5.4	0.20	48

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 85℃) (120Hz)
25(32)	3.3	5x5.4	0.20	13
	4.7	5x5.4	0.20	16
	10	6.3x5.4	0.20	27
35(44)	2.2	4x5.4	0.20	10
	3.3	5x5.4	0.20	14
	4.7	5x5.4	0.20	17
	10	6.3x5.4	0.20	28
50(63)	1.0	4x5.4	0.18	7
	2.2	5x5.4	0.18	12
	3.3	5x5.4	0.18	14
	4.7	6.3x5.4	0.18	19

JAMICON Surface Mount Aluminium Electrolytic Capacitors TEAPO

Jamicon Series：CP
Teapo Series：NV

Non-polar Series



Jamicon




Teapo

■ Endurance:105℃ 2000 hours
■Recommended Applications:Non-polarized,Low profile vertical chip, 5.5mm height (≦ Φ6.3)
■ Corresponding product to RoHS
■ AEC-Q200 compliant : Please contact Jamicon for more details, test data, information


■ Specifications

Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	6.3 ~ 50VDC
Rated Capacitance Range	1~ 47 μF
Capacitance Tolerance	± 20 % at 120Hz , 20℃
Leakage Current (20℃)	I≦0.05CV or 10 μA ,whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	Shown in the table of standard rating
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120HZ) | 6.3 | 10 | 25 | 35 | 50 Z(-25℃) / Z(20℃) | 4 | 3 | 2 | 2 | 2 Z(-40℃) / Z(20℃) | 8 | 6 | 4 | 3 | 3
Endurance	After applying rated voltage for 2000Hrs at 105℃,Stay back to 20 ℃ temperature measurement,the capacitors shall meet the following requirements.(The polarity need to exchange every 250 hours) Capacitance Change: Within ±20% of the initial value Dissipation Factor: Not more than 200% of the specified value Leakage Current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■MARKING

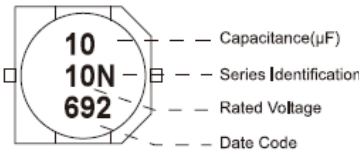


Teapo

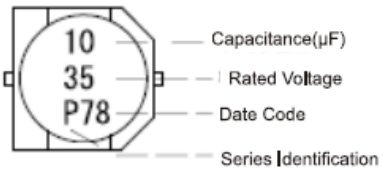

Jamicon

■ Dimensions [mm]

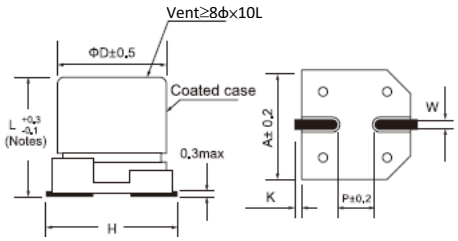

(Notes) Φ8 ~ Φ10&6.3X7.7=L±0.3

Dimensions	ΦD	L	A	H	W	P	K
B01	4.0	5.4	4.3	5.5 Max	0.65±0.1	1.0	0.35+0.15/-0.2
C01	5.0	5.4	5.3	6.5 Max	0.65±0.1	1.5	0.35+0.15/-0.2
E01	6.3	5.4	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2

■ Multiplier for Ripple Current

Frequency (Hz)	60	120	1K	10K
Coefficient	0.85	1.00	1.10	1.20

Jamicon Series：CP


Teapo Series：NV Non-polar Series

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃) (120Hz)
6.3(8)	22	5x5.4	0.26	29
	33	6.3x5.4	0.26	43
	47	6.3x5.4	0.26	46
10(13)	10	4X5.4	0.22	25
	22	6.3x5.4	0.22	39
	33	6.3x5.4	0.22	43
16(20)	4.7	4X5.4	0.20	20
	10	5x5.4	0.20	25
	22	6.3x5.4	0.20	39
25(32)	3.3	4X5.4	0.20	12

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 105℃) (120Hz)
25(32)	4.7	5x5.4	0.20	21
	10	6.3x5.4	0.20	28
35(44)	2.2	4X5.4	0.20	12
	3.3	5x5.4	0.20	21
	4.7	5x5.4	0.20	22
	10	6.3x5.4	0.20	30
50(63)	1.0	4X5.4	0.18	10
	2.2	5x5.4	0.18	16
	3.3	5x5.4	0.18	21
	4.7	6.3x5.4	0.18	31

Jamicon Series：CB
Teapo Series：HV 125℃ High temperature Series



Jamicon Teapo

■ Endurance:125℃, 1000~2000 hours
■Recommended Applications: Automatic Mounting and Reflow Soldering,Industrial, Automobile, Meter
■ Corresponding product to RoHS
■ AEC-Q200 compliant : Please contact Jamicon for more details, test data, information

■ Specifications

Item	Characteristics
Category Temperature Range	-40 ~ +125℃
Rated Voltage Range	10 ~ 50VDC
Rated Capacitance Range	47~ 1000μF
Capacitance Tolerance	± 20 % at 120Hz , 20℃
Leakage Current (20℃)	I≦0.01CV or 3μA ,whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	Shown in the table of standard rating

Low Temperature Stability Impedance Ratio (MAX)

WV / Z(120HZ)	10	16	25	35	50
Z(-25℃) / Z(20℃)	2	2	2	2	2
Z(-40℃) / Z(20℃)	3	3	3	3	3


Endurance

After applying rated voltage for 1000~2000hrs at 125℃,Stay back to 20 ℃ temperature measurement,the capacitors shall meet the following requirements.


Capacitance Change	Within ±30% of the initial value	
Dissipation Factor	Not more than 300% of the specified value	
DΦ	6.3x7.7-8x6.2	≧8x10.2
Life	1000hrs	2000hrs
Leakage Current	Not more than the specified value	

Item	Characteristics
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 125℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■MARKING




Teapo



Jamicon

■Dimensions [mm]

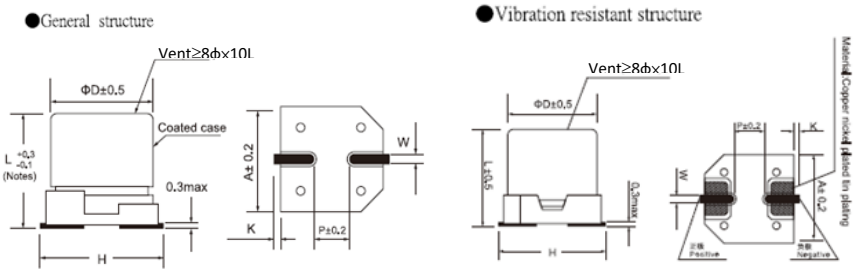

（Notes）Φ8～Φ10&6.3X7.7=L±0.3

Dimensions	ΦD	L	A	H	W	P	K
E04	6.3	7.7	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15/-0.2
G02	8.0	6.2	8.3	9.5 Max	0.65±0.1	2.2	0.35+0.15/-0.2
G03	8.0	10.2	8.3	10.0 Max	0.90±0.2	3.1	0.70±0.20
H03	10.0	10.2	10.3	12.0 Max	0.90±0.2	4.6	0.70±0.20

■ Multiplier for Ripple Current

Frequency (Hz)	60	120	1K	10K
Coefficient	0.85	1.00	1.20	1.30

Jamicon Series：CB

Teapo Series：HV

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ (%)	Ripple current (mA/rms 125℃) (120Hz)
10(13)	100	8X6.2	0.26	75
	150	6.3x7.7	0.26	70
		8x6.2	0.26	75
	220	8x10.2	0.26	130
	330	8x10.2	0.26	130
	470	8x10.2	0.26	130
		10x10.2	0.26	180
	680	10x10.2	0.26	180
	1000	10x10.2	0.26	180
16(20)	47	6.3x7.7	0.20	70
	100	6.3x7.7	0.20	70
		8x6.2	0.20	75
	150	8x10.2	0.20	130
	220	8x10.2	0.20	130
	330	8x10.2	0.20	180
	470	10x10.2	0.20	180
25(32)	47	6.3x7.7	0.18	70
		8x6.2	0.18	75
	100	6.3x7.7	0.18	70
		8x6.2	0.18	75
		8x10.2	0.18	130
	150	8x10.2	0.18	130
	220	8x10.2	0.18	130
		10x10.2	0.18	180
	330	10x10.2	0.18	180

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ (%)	Ripple current (mA/rms 125℃) (120Hz)
35(44)	10	8x6.2	0.14	40
		8x10.2	0.14	50
	22	6.3x7.7	0.14	70
	33	6.3x7.7	0.14	70
		8x6.2	0.14	75
	47	6.3x7.7	0.14	70
		8X6.2	0.14	75
		8x10.2	0.14	130
	100	8x6.2	0.14	75
		8x10.2	0.14	130
		10x10.2	0.14	180
	120	8x10.2	0.14	130
	150	10x10.2	0.14	180
	220	8x10.2	0.14	130
		10x10.2	0.14	180
50(63)	10	8x6.2	0.12	70
		8x10.2	0.12	75
	22	6.3x7.7	0.12	70
		8x6.2	0.12	75
	33	8x10.2	0.12	130
	47	8x10.2	0.12	130
	82	8x10.2	0.12	130
	100	10x10.2	0.12	180
	150	10x10.2	0.12	180
	220	10x10.2	0.12	180

Jamicon Series：CQ
Teapo Series：QV

125℃ High temperature long life Series



Jamicon



Teapo


■ Endurance:6.3 φ ~ 18 φ , 125℃ , 2,000 ~ 4,000 hours
■ Recommended Applications: For automobile modules and high temperature applications
■ Corresponding product to RoHS
■ AEC-Q200 compliant : Please contact Jamicon for more details, test data, information

■ Specifications


Item	Characteristics
Category Temperature Range	-40 ~ +125℃
Rated Voltage Range	10~ 100VDC
Rated Capacitance Range	10 ~ 3300 μF
Capacitance Tolerance	± 20 % at 120Hz , 20℃
Leakage Current (20℃)	I≦0.01CV or 3 μA ,whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	Shown in the table of standard rating
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120HZ) 10 16 25 35 50 63 80 100 Z(-40℃)/Z(20℃) 12 8 6 4 4 3 3 3
Endurance	After applying rated voltage for 2000~4000hrs at 125℃,Stay back to 20 ℃ temperature measurement,the capacitors shall meet the following requirements. Capacitance Change: Within ±30% of the initial value Dissipation Factor: Not more than 300% of the specified value Leakage Current: Not more than the specified value DΦ: 6.3Φ | 8~12.5Φ | 16~18x16.5 | 16~18x21.5 Life: 2000hrs | 3000hrs | 3500hrs | 4000hrs
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 125℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■MARKING

● ≤10Φ




● ≧12.5Φ




Teapo

● ≤10Φ




● ≧12.5Φ



Jamicon

■Dimensions

● General structure

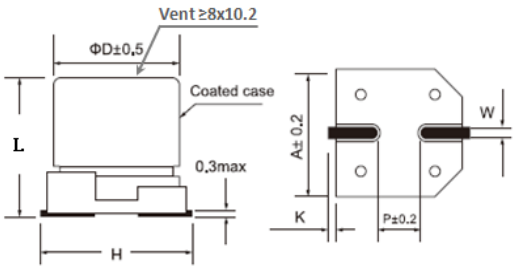

（Notes） φ 8~ φ 10&6.3×7.7= L±0.3; ≥12.5 φ = L±1.0

Dimensions	ΦD	L	A	H	W	P	K
E04	6.3	7.7	6.6	7.8 Max	0.65±0.1	2.1	0.35+0.15 /-0.2
G03	8.0	10.2	8.3	10.0 Max	0.90±0.2	3.1	0.70±0.20
H03	10.0	10.2	10.3	12.0 Max	0.90±0.2	4.6	0.70±0.20
K05	12.5	13.5	13.0	15.0 Max	1.20±0.2	4.4	0.70±0.30
M06	16.0	16.5	17.0	19.0 Max	1.20±0.2	6.4	0.70±0.30
M09	16.0	21.5	17.0	19.0 Max	1.20±0.2	6.4	0.70±0.30
N06	18.0	16.5	19.0	21.0 Max	1.20±0.2	6.5	0.70±0.30
N09	18.0	21.5	19.0	21.0 Max	1.20±0.2	6.5	0.70±0.30

■ Multiplier for Ripple Current

Frequency (Hz)	50	120	300	1K	100K
Coefficient	0.35	0.50	0.65	0.85	1.0

Jamicon Series：CQ

Teapo Series：QV

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 125℃ 100KHz)	Impedance (Ω,20℃) (100KHz)
10(13)	220	8x10.2	0.30	270	0.20
	330	8x10.2	0.30	270	0.20
	470	10x10.2	0.30	500	0.15
16(20)	100	6.3x7.7	0.23	197	0.50
		8x10.2	0.23	270	0.20
	220	8x10.2	0.23	270	0.20
	330	10x10.2	0.23	500	0.15
	470	10x10.2	0.23	500	0.15
25(32)	100	6.3x7.7	0.18	197	0.50
		8x10.2	0.18	270	0.20
	220	8x10.2	0.18	270	0.20
		10x10.2	0.18	500	0.15
	330	10x10.2	0.18	500	0.15
	820	12.5x13.5	0.18	1700	0.08
	1000	12.5x13.5	0.18	1700	0.08
	1200	16x16.5	0.18	2400	0.05
	1600	16x16.5	0.18	2400	0.05
	2200	18x16.5	0.18	2600	0.045
	2700	16x21.5	0.18	3000	0.038
	3300	18x21.5	0.18	3250	0.032
35(44)	33	6.3x7.7	0.16	197	0.50
	47	6.3x7.7	0.16	197	0.50
		8x10.2	0.16	270	0.20
	100	8x10.2	0.16	270	0.20
	220	10x10.2	0.16	500	0.15
	470	12.5x13.5	0.16	1700	0.08
	560	12.5x13.5	0.16	1700	0.08
	680	12.5x13.5	0.16	1700	0.08
	820	16x16.5	0.16	2400	0.05
	1000	16x16.5	0.16	2400	0.05
	1200	18x16.5	0.16	2600	0.045
	1600	16x21.5	0.16	3000	0.038
	2200	18x21.5	0.16	3250	0.032
50(63)	22	6.3x7.7	0.16	197	0.50
	33	6.3x7.7	0.16	197	0.50
		8x10.2	0.16	270	0.25
	47	8x10.2	0.16	270	0.25
	100	10x10.2	0.16	500	0.20
	470	16x16.5	0.16	2000	0.08
	560	16x16.5	0.16	2000	0.08
	680	18x16.5	0.16	2100	0.078
	820	18x16.5	0.16	2100	0.078
	1000	16x21.5	0.16	2800	0.040
	1200	18x21.5	0.16	2900	0.038

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms 125℃ 100KHz)	Impedance (Ω,20℃) (100KHz)
63(79)	10	6.3x7.7	0.12	60	2.00
	22	8x10.2	0.12	100	0.70
	33	8x10.2	0.12	100	0.70
		10x10.2	0.12	170	0.50
	47	8x10.2	0.12	100	0.70
		10x10.2	0.12	170	0.50
	150	12.5x13.5	0.12	1000	0.20
	220	12.5x13.5	0.12	1000	0.20
	390	16x16.5	0.12	1900	0.13
	470	18x16.5	0.12	2000	0.11
	560	16x21.5	0.12	2500	0.07
	750	18x21.5	0.12	2600	0.068
80(100)	10	8x10.2	0.12	70	0.75
	22	8x10.2	0.12	70	0.75
		10x10.2	0.12	115	0.55
	33	8x10.2	0.12	70	0.75
		10x10.2	0.12	115	0.55
	47	10x10.2	0.12	115	0.55
	150	12.5x13.5	0.12	700	0.28
	270	16x16.5	0.12	1000	0.19
	330	18x16.5	0.12	1100	0.17
	390	16x21.5	0.12	1600	0.12
	520	18x21.5	0.12	1700	0.11
100(125)	10	8x10.2	0.10	70	0.75
	22	8x10.2	0.10	70	0.75
		10x10.2	0.10	115	0.55
	33	10x10.2	0.10	115	0.55
	82	12.5x13.5	0.10	700	0.28
	150	16x16.5	0.10	1000	0.19
	180	18x16.5	0.10	1100	0.17
	220	16x21.5	0.10	1600	0.12
	220	18x21.5	0.10	1700	0.11

Jamicon Series：CM
Teapo Series：UV

135℃ 2000Hrs



Jamicon Teapo


■ Endurance: 135℃, 2,000 hours
■ Recommended application: Suitable for automobiles and other high-temperature applications
■ Corresponding product to RoHS
■ AEC-Q200 compliant : Please contact Jamicon for more details, test data, information

■ Specifications

Item	Characteristics
Category Temperature Range	-40 ~ +135℃
Rated Voltage Range	10~ 50VDC
Rated Capacitance Range	10 ~ 3300μF
Capacitance Tolerance	± 20 % at 120Hz , 20℃
Leakage Current (20℃)	I≦0.01CV or 3μA ,whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	Shown in the table of standard rating
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120HZ): 10, 16, 25, 35, 50 Z(-40℃)/Z(20℃): 12, 8, 6, 4, 4
Endurance	After applying rated voltage for 2000 at 135℃,Stay back to 20 ℃ temperature measurement,the capacitors shall meet the following requirements. Capacitance Change: Within ±30% of the initial value Dissipation Factor: Not more than 300% of the specified value Leakage Current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hours at 135℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■MARKING


● ≤10Φ ● ≧12.5Φ ● ≤10Φ ● ≧12.5Φ

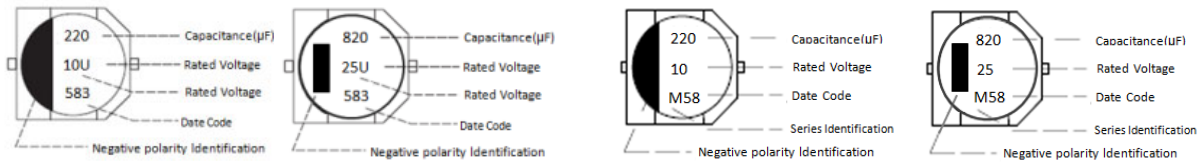

Teapo Jamicon

■Dimensions

● General structure

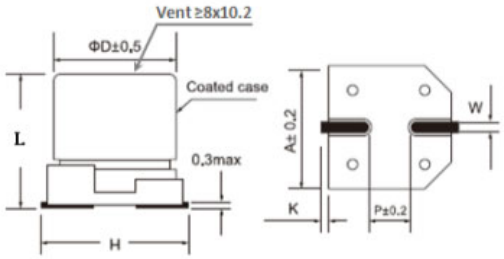

（Notes）φ8~φ10= L±0.3; ≥12.5φ= L±1.0

Dimensions	ΦD	L	A	H	W	P	K
G03	8.0	10.2	8.3	10.0 Max	0.90±0.2	3.1	0.70±0.20
H03	10.0	10.2	10.3	12.0 Max	0.90±0.2	4.6	0.70±0.20
K05	12.5	13.5	13.0	15.0 Max	1.20±0.2	4.4	0.70±0.30
M06	16.0	16.5	17.0	19.0 Max	1.20±0.2	6.4	0.70±0.30
M09	16.0	21.5	17.0	19.0 Max	1.20±0.2	6.4	0.70±0.30
N06	18.0	16.5	19.0	21.0 Max	1.20±0.2	6.5	0.70±0.30
N09	18.0	21.5	19.0	21.0 Max	1.20±0.2	6.5	0.70±0.30

■ Multiplier for Ripple Current

Frequency (Hz)	50	120	1K	10K up
Coefficient	0.35	0.50	0.83	1.0

Jamicon Series：CM

Teapo Series：UV

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size Φ DxL(mm)	tan δ	Ripple current (mA/rms 135℃ 100KHz)	Impedance (Ω,20℃) (100KHz)
10(13)	220	8x10.2	0.30	270	0.20
	330	8x10.2	0.30	270	0.20
	330	10x10.2	0.30	500	0.15
	470	10x10.2	0.30	500	0.15
16(20)	100	8x10.2	0.23	270	0.20
	220	8x10.2	0.23	270	0.20
	330	10x10.2	0.23	500	0.15
	470	10x10.2	0.23	500	0.15
25(32)	100	8x10.2	0.18	270	0.20
	220	10x10.2	0.18	500	0.15
	330	10x10.2	0.18	500	0.15
	820	12.5x13.5	0.18	750	0.08
	1000	12.5x13.5	0.18	750	0.08
	1200	16x16.5	0.18	1200	0.06
	1500	16x16.5	0.18	1200	0.06
	1800	16x16.5	0.18	1200	0.06
	2200	18x16.5	0.18	1400	0.05
	2700	16x21.5	0.18	1900	0.04
	3300	18x21.5	0.18	2200	0.035
35(44)	68	8x10.2	0.16	270	0.20
	100	8x10.2	0.16	270	0.20

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size Φ DxL(mm)	tan δ	Ripple current (mA/rms 135℃ 100KHz)	Impedance (Ω,20℃) (100KHz)
35(44)	220	10x10.2	0.16	500	0.15
	330	10x10.2	0.16	500	0.15
	470	12.5x13.5	0.16	750	0.08
	560	12.5x13.5	0.16	750	0.08
	680	16x16.5	0.16	1200	0.06
	820	16x16.5	0.16	1200	0.06
	1000	16x16.5	0.16	1200	0.06
	1200	18x16.5	0.16	1400	0.05
	1500	16x21.5	0.16	1900	0.04
	1500	18x16.5	0.16	1400	0.05
	1800	18x21.5	0.16	2200	0.035
	2200	18x21.5	0.16	2200	0.035
50(63)	47	8x10.2	0.16	270	0.30
	100	10x10.2	0.16	500	0.25
	470	16x16.5	0.16	1000	0.075
	560	16x16.5	0.16	1000	0.075
	680	18x16.5	0.16	1200	0.075
	820	18x16.5	0.16	1200	0.075
	1000	16x21.5	0.16	1600	0.06
	1200	18x21.5	0.16	1900	0.04

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：ST
Teapo Series：S5 Low Profice Series






■ Endurance: 105℃ 1000hours
■ Recommended Applications :Applicable for VTR,Camera,Car Audio,Miniaudio and other industrial/commrecial applications
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40~ +105℃
Rated Voltage Range	6.3 ~ 50VDC
Rated Capacitance Range	1 ~ 470 μF
Capacitance Tolerance	± 20 % at 120Hz , 20℃
Leakage Current (20℃)	I=0.01CV or 3(μA) whichever is greater.(After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV 6.3 10 16 25 35 50 tan δ 0.24 0.20 0.17 0.15 0.12 0.10
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120Hz) 6.3 10 16 25 35 50 Z-25℃ / Z+20℃ 4 3 2 2 2 2 Z-40℃ / Z+20℃ 8 6 4 4 3 3
Endurance	After applying rated voltage with ripple current for 1000 hours at 105℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 25% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: initial specified value or less
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 500 hours at 105℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

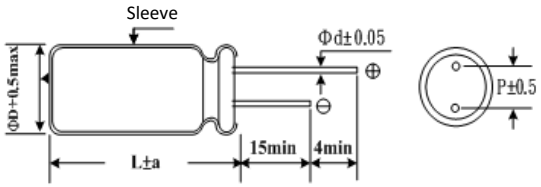

ΦD	4.0	5.0	6.3	8.0
P	1.5	2.0	2.5	3.5
Φd	0.45			
a	1.0			

Notes：8ΦHave ven

■ Multiplier for Ripple Current

Freq. (Hz)	120	300	1K	10K
1~47 μF	1.00	1.20	1.30	1.50
100~470 μF	1.00	1.10	1.15	1.20

Jamicon Series：ST

Teapo Series：S5

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
6.3 (8)	10	4x5	0.24	18
	22	4x5	0.24	28
	33	4x5	0.24	33
	47	4x5	0.24	35
		5x5	0.24	45
	100	5x5	0.24	55
		6.3x5	0.24	70
	220	6.3x5	0.24	90
	330	8x5	0.24	115
	470	8x5	0.24	100
10 (13)	10	4x5	0.20	20
	22	5x5	0.20	33
	33	4x5	0.20	34
		5x5	0.20	41
	47	5x5	0.20	46
	68	6.3x5	0.20	54
	100	6.3x5	0.20	80
16 (20)	4.7	4x5	0.17	20
	10	4x5	0.17	23
	22	4x5	0.17	29
	22	5x5	0.17	37
	33	5x5	0.17	44
		6.3x5	0.17	49

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
16 (20)	47	5x5	0.17	54
		6.3x5	0.17	58
	100	6.3x5	0.17	85
25 (32)	4.7	4x5	0.15	16
	10	4x5	0.15	20
		5x5	0.15	27
	22	6.3x5	0.15	42
	33	5x5	0.15	45
		6.3x5	0.15	53
	47	5x5	0.15	55
		6.3x5	0.15	65
	100	8x5	0.15	90
35 (44)	4.7	4x5	0.12	18
	10	5x5	0.12	30
	22	6.3x5	0.12	48
50 (63)	1.0	4x5	0.10	9
	2.2	4x5	0.10	13
	3.3	4x5	0.10	17
	4.7	4x5	0.10	17
		5x5	0.10	20
	10	6.3x5	0.10	33
	22	6.3x5	0.10	55

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：SH
Teapo Series：S7 Low profice Series




■ Endurance: 105℃ 1000 hours
■ Recommended Applications :For Portable Micro Computer,Disk Driver, Small Calculator and Audio equipmeng…etc
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃
Rated Voltage Range	6.3 ~ 63VDC
Rated Capacitance Range	1 ~ 470 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.01CV or 3(μA) whichever is greater.(After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 6.3 / 10 / 16 / 25 / 35 / 50 / 63 tan δ: 0.24 / 0.21 / 0.18 / 0.15 / 0.13 / 0.12 / 0.08
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120Hz): 6.3 / 10 / 16 / 25 / 35 / 50 / 63 Z-25℃ / Z+20℃: 4 / 3 / 2 / 2 / 2 / 2 / 2 Z-40℃ / Z+20℃: 8 / 6 / 4 / 4 / 3 / 3 / 3
Endurance	After applying rated voltage with ripple current for 1000 hours at 105℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: initial specified value or less
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for500 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

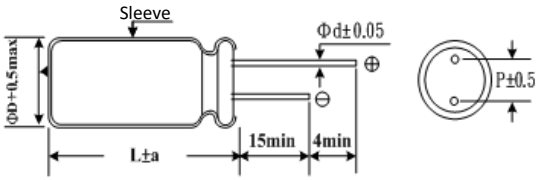

ΦD	4.0	5.0	6.3	8.0
P	1.5	2.0	2.5	3.5
Φd	0.45			0.5
a	1.0			

Notes：8Φhave ven

■ Multiplier for Ripple Current

Freq. (Hz)	50	120	300	1K	10K
1~47 μF	0.75	1.00	1.20	1.30	1.50
100~330 μF	0.75	1.00	1.10	1.15	1.20

Jamicon Series：SH

Teapo Series：S7


■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
6.3 (8)	22	4x7	0.24	37
	33	5x7	0.24	42
	47	4x7	0.24	46
		5x7	0.24	55
	100	5x7	0.24	75
		6.3x7	0.24	90
	220	6.3x7	0.24	130
	330	8x7	0.24	140
10 (13)	22	4x7	0.21	31
		5x7	0.21	38
	33	4x7	0.21	39
		5x7	0.21	47
	47	4x7	0.21	50
		5x7	0.21	60
		6.3x7	0.21	60
	100	5x7	0.21	85
		6.3x7	0.21	100
	220	6.3x7	0.21	135
16 (20)	2.2	4x7	0.18	7
	3.3	4x7	0.18	13
	4.7	4x7	0.18	19
	10	4x7	0.18	29
	22	4x7	0.18	36
		5x7	0.18	44
	33	4x7	0.18	50
		5x7	0.18	57
	47	5x7	0.18	75
		6.3x7	0.18	77
	68	5x7	0.18	84
	100	5x7	0.18	94
		6.3x7	0.18	110
	150	6.3x7	0.18	120
	220	8x7	0.18	140
		8x9	0.18	140
	330	8x9	0.18	155
	470	8x9	0.18	165

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
25 (32)	4.7	4x7	0.15	24
	10	4x7	0.15	33
		5x7	0.15	35
		6.3x7	0.15	35
	22	4x7	0.15	43
		5x7	0.15	51
		6.3x7	0.15	53
	33	5x7	0.15	55
		6.3x7	0.15	65
	47	5x7	0.15	67
		6.3x7	0.15	79
	100	6.3x7	0.15	120
		8x7	0.15	120
35 (44)	4.7	4x7	0.13	24
		5x7	0.13	24
	10	4x7	0.13	34
		5x7	0.13	36
	22	5x7	0.13	48
		6.3x7	0.13	57
	33	6.3x7	0.13	70
	47	6.3x7	0.13	81
50 (63)	1.0	4x7	0.12	10
	2.2	4x7	0.12	19
	3.3	4x7	0.12	24
	4.7	4x7	0.12	29
		5x7	0.12	31
	10	4x7	0.12	37
		5x7	0.12	45
		6.3x7	0.12	45
	22	6.3x7	0.12	65
63 (79)	1.0	4x7	0.08	13
	2.2	4x7	0.08	21
	3.3	4x7	0.08	26
	4.7	4x7	0.08	26
		6.3x7	0.08	33
	10	5x7	0.08	42
		6.3x7	0.08	50

Jamicon Series：H5

Teapo Series：H5 Low profice Series



■ Endurance: 105℃ 2000hours
Low proglie/minianure,5mm height


■ Recommended Applications :Monitor/Compurer,AV(TV,Video,Audio),
OA/HA/Communication,Small signal

■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃
Rated Voltage Range	6.3~ 50VDC
Rated Capacitance Range	1 ~ 330 μF
Capacitance Tolerance	± 20 % at 120Hz , 20℃
Leakage Current (20℃)	I=0.01CV or 3(μA) whichever is greater.(After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 6.3 / 10 / 16 / 25 / 35 / 50 tan δ: 0.26 / 0.24 / 0.20 / 0.16 / 0.13 / 0.12 Down size tan δ add 3%
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120Hz): 6.3 / 10 / 16 / 25 / 35 / 50 Z-25℃ / Z+20℃: 4 / 3 / 2 / 2 / 2 / 2 Z-40℃ / Z+20℃: 8 / 6 / 4 / 4 / 4 / 4
Endurance	After applying rated voltage with ripple current for 2000 hours at 105℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: initial specified value or less
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

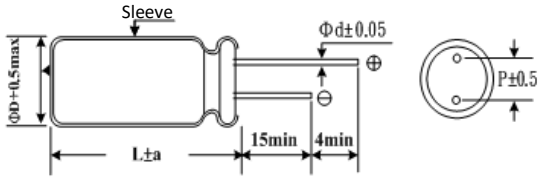

ΦD	4.0	5.0	6.3	8.0
P	1.5	2.0	2.5	3.5
Φd	0.45	0.45	0.45	0.45
a	1.0	1.0	1.0	1.0

Notes：8ΦHave ven

■ Multiplier for Ripple Current

Freq. (Hz)	50	120	1K	10K
6.3~16V	0.80	1.00	1.10	1.20
25~50V	0.80	1.00	1.50	1.70

Jamicon Series：H5


Teapo Series：H5

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
6.3 (8)	10	4x5	0.26	15
	22	4x5	0.26	25
	33	5x5	0.26	30
	47	5x5	0.26	35
	100	6.3x5	0.26	60
	220	8x5	0.26	95
	330	8x5	0.26	120
10 (13)	10	4x5	0.24	20
	22	5x5	0.24	25
	33	5x5	0.24	35
	47	6.3x5	0.24	45
	100	6.3x5	0.24	70
16 (20)	4.7	4x5	0.20	10
	10	4x5	0.20	20
	22	5x5	0.20	30
	33	5x5	0.20	40

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
16 (20)	47	6.3x5	0.20	55
	100	6.3x5	0.2	90
25 (32)	4.7	4x5	0.16	15
	10	4x5	0.16	25
	22	6.3x5	0.16	40
	33	6.3x5	0.16	50
35 (44)	4.7	4x5	0.13	15
	10	5x5	0.13	30
	22	6.3x5	0.13	45
50 (63)	1.0	4x5	0.12	10
	2.2	4x5	0.12	15
	3.3	4x5	0.12	15
	4.7	5x5	0.12	20
	10	6.3x5	0.12	35
	22	6.3x5	0.12	55

Jamicon Series：H7
Teapo Series：H7 Low profice Series




■ Endurance:105℃ 2000 hours
Low profile/miniature,7mm/9mm height
■ Recommended Applications :Monitor/Compurer,AV(TV,Video,Audio),
OA/HA/Communication,Small signal
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃
Rated Voltage Range	6.3 ~ 63VDC
Rated Capacitance Range	1 ~ 470 μF
Capacitance Tolerance	± 20 % at 120Hz , 20℃
Leakage Current (20℃)	I=0.01CV or 3(μA) whichever is greater.(After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 6.3 / 10 / 16 / 25 / 35 / 50 / 63 tan δ: 0.24 / 0.20 / 0.18 / 0.15 / 0.13 / 0.12 / 0.10 Down size tan δ add 3%
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120Hz): 6.3 / 10 / 16 / 25 / 35 / 50 / 63 Z-25℃ / Z+20℃: 4 / 3 / 2 / 2 / 2 / 2 / 2 Z-40℃ / Z+20℃: 8 / 6 / 4 / 4 / 4 / 4 / 4
Endurance	After applying rated voltage with ripple current for 2000 hours at 105℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: initial specified value or less
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

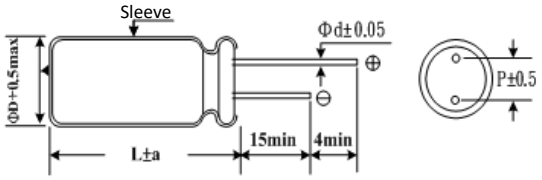

ΦD	4.0	5.0	6.3	8.0
P	1.5	2.0	2.5	3.5
Φd	0.45	0.45	0.45	0.5
a	1.0	1.0	1.0	1.0

Notes：8Φhave ven

■ Multiplier for Ripple Current

Freq. (Hz)	50	120	1K	10K
6.3~16V	0.80	1.00	1.1	1.2
25~35V	0.80	1.00	1.5	1.7
50~63V	0.80	1.00	1.6	1.9

Jamicon Series：H7

Teapo Series：H7


■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
6.3 (8)	33	4x7	0.24	35
	47	5x7	0.24	50
	100	5x7	0.24	70
	220	6.3x7	0.24	110
	330	8x7	0.24	150
	470	8x9	0.24	200
10 (13)	22	4x7	0.20	30
	33	4x7	0.20	40
	47	5x7	0.20	60
	100	6.3x7	0.20	90
	220	6.3x7	0.20	135
	330	8x9	0.20	160
	470	8x9	0.20	210
16 (20)	2.2	4x7	0.18	10
	3.3	4x7	0.18	10
	4.7	4x7	0.18	15
	10	4x7	0.18	25
	22	4x7	0.18	35
	33	5x7	0.18	50
	47	6.3x7	0.18	70
	100	6.3x7	0.18	110
	220	8x9	0.18	180
	330	8x9	0.18	210

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
25 (32)	4.7	4x7	0.15	20
	10	4x7	0.15	30
	22	5x7	0.15	50
	33	6.3x7	0.15	65
	47	6.3x7	0.15	70
	100	8x7	0.15	115
35 (44)	4.7	4x7	0.13	25
	10	4x7	0.13	35
	22	5x7	0.13	60
	33	6.3x7	0.13	70
	47	8x7	0.13	80
	100	8x9	0.13	145
50 (63)	1.0	4x7	0.12	10
	2.2	4x7	0.12	20
	3.3	4x7	0.12	25
	4.7	4x7	0.12	30
	10	5x7	0.12	35
	22	6.3x7	0.12	65
	33	8x7	0.12	80
	47	8x9	0.12	100
63 (79)	1.0	4x7	0.10	10
	2.2	4x7	0.10	20
	3.3	4x7	0.10	25
	4.7	5x7	0.10	35
	10	6.3x7	0.10	50

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：SK
Teapo Series：SK Standard Series

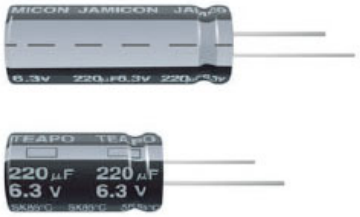

■ Endurance: 85℃ 2000hours
■ Recommended Applications :For general purpose , decoupling , by pass and filtering circuit in entertainment electr
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics		
Category Temperature Range	-40~+85℃	-40~+85℃	-25~+85℃
Rated Voltage Range	6.3 ~ 100VDC	160 ~ 450VDC	500~550VDC
Rated Capacitance Range	1~ 22000 μF	1 ~ 470 μF	2.2~82 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)	± 20 % (120Hz , 20℃)	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.01CV or 3 μA whichever is greater.	I=0.03CV+10(μA)	I=0.03CV+10(μA)
	(After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)		

Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)

WV	6.3	10	16	25	35~40	50~63	100	160~250	350~450	500~550
tan δ	0.22	0.19	0.16	0.14	0.12	0.10	0.08	0.15	0.20	0.24

When nominal capacitance is over 1000 μF,tan δ shall be added 0.02 to the listed value with increase of every 1000 μF.

Low Temperature Stability Impedance Ratio (MAX)

WV / Z(120Hz)	6.3	10	16	25	35~100	160~250	315~350	400~550
Z-25℃ / Z+20℃	8	6	5	3	3	7	10	15
Z-40℃ / Z+20℃	10	8	6	4	3	—	—	—

Endurance


After applying rated voltage for 2000 hours at 85℃,Stay back to 20 ℃ temperature measurement, the capacitors shall meet the following requirements.

Capacitance change	Within ± 20% of initial value
D.F. (tan δ)	Not more than 200% of specified value
Leakage current	initial specified value or less

Shelf Life

The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 85℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

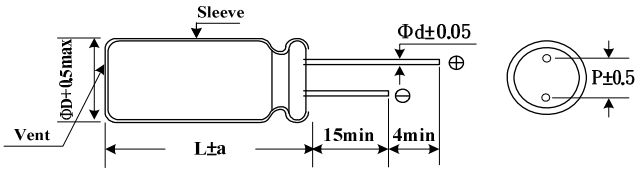

ΦD	5	6.3	8	10	13	16	18	22
P	2.0	2.5	3.5	5.0		7.5		10.0
Φd	0.5	0.5	0.6	0.6		0.8		1.0
a	1.5	1.5	1.5	1.5	2.0	2.0	2.0	2.0

■ Multiplier for Ripple Current

Freq. (Hz)	60	120	1K	≥10K
6.3~25V	0.85	1.00	1.10	1.20
35 ~ 100V	0.80	1.00	1.15	1.25
160 ~ 200V	0.75	1.00	1.25	1.40
350 ~ 450V	0.70	1.00	1.30	1.50
500~550V	0.60	1.00	1.10	1.15

Jamicon Series：SK
Teapo Series：SK

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms85℃) (120Hz)
6.3 (8)	22	5x11	0.22	50
	33	5x11	0.22	65
	47	5x11	0.22	105
	100	5x11	0.22	160
	220	5x11	0.22	240
		6.3x11	0.22	270
	330	6.3x11	0.22	330
	470	6.3x11	0.22	390
	680	8x11	0.22	520
	1000	8x11	0.22	670
		10x12.5	0.22	700
	2200	10x20	0.24	1220
	3300	10x20	0.26	1440
	4700	13x20	0.28	1730
	6800	13x25	0.32	2160
	10000	16x25	0.40	2390
	15000	16x36	0.50	3050
	22000	18x40	0.64	3680
10 (13)	10	5x11	0.19	50
	22	5x11	0.19	60
	33	5x11	0.19	80
	47	5x11	0.19	110
	100	5x11	0.19	180
	220	6.3x11	0.19	290
	330	6.3x11	0.19	350
	470	6.3x11	0.19	420
	680	8x11	0.19	520
	1000	10x12.5	0.19	760
	2200	10x20	0.21	1310
	3300	13x20	0.23	1630
	4700	13x25	0.25	2020
	6800	16x25	0.29	2270
	10000	16x36	0.37	2900
		18x32	0.37	3000
	15000	18x36	0.47	3360
	22000	22x40	0.59	4000
16 (20)	10	5x11	0.16	50
	22	5x11	0.16	75
	33	5x11	0.16	110
	47	5x11	0.16	130
	68	5x11	0.16	150
	100	5x11	0.16	175
	150	6.3x11	0.16	245
	220	6.3x11	0.16	310
	330	6.3x11	0.16	360
		8x11	0.16	450
	470	8x11	0.16	540
	680	10x12.5	0.16	700
	1000	10x16	0.16	920
	2200	13x20	0.18	1510
	3300	13x25	0.20	1930
	4700	16x25	0.22	2160
	6800	16x32	0.26	2650
	10000	18x36	0.34	3230
	15000	22x40	0.44	4090
	22000	22x40	0.58	4200
25 (32)	10	5x11	0.14	60
	22	5x11	0.14	95
	33	5x11	0.14	115
	47	5x11	0.14	140
	68	5x11	0.14	150
	100	6.3x11	0.14	230

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms85℃) (120Hz)
25 (32)	220	8x11	0.14	390
	330	8x11	0.14	480
	470	8x15	0.14	530
		10x12.5	0.14	600
	680	10x15	0.14	760
	1000	10x20	0.14	1080
		13x16	0.14	1070
	2200	13x25	0.16	1760
	3300	16x25	0.18	2040
	4700	16x32	0.20	2500
	6800	18x36	0.24	3100
	10000	22x40	0.32	3700
	15000	22x40	0.42	3980
35 (44)	10	5x11	0.12	70
	22	5x11	0.12	100
	33	5x11	0.12	120
	47	5x11	0.12	150
	100	6.3x11	0.12	240
	220	8x11	0.12	420
	330	10x12.5	0.12	550
	470	10x15	0.12	700
	680	10x20	0.12	900
	1000	13x20	0.12	1240
	2200	16x25	0.14	1890
	3300	16x36	0.16	2530
		18x32	0.16	2450
	4700	18x36	0.18	2960
	6800	22x40	0.22	3600
50 (63)	10	5x11	0.10	75
	22	5x11	0.10	110
	33	5x11	0.10	140
	47	6.3x11	0.10	180
	100	8x11	0.10	310
	220	10x12.5	0.10	490
	330	10x15	0.10	650
	470	10x20	0.10	820
	1000	13x25	0.10	1500
	2200	16x36	0.12	2390
		18x32	0.12	2400
	3300	18x36	0.14	2890
	4700	22x40	0.16	3500
63 (79)	10	5x11	0.10	75
	22	5x11	0.10	110
		6.3x11	0.10	130
	33	6.3x11	0.10	150
	47	6.3x11	0.10	190
	100	10x12.5	0.10	330
	220	10x15	0.10	520
		10x20	0.10	600
	330	10x20	0.10	730
	470	13x20	0.10	930
	680	13x25	0.10	1200
	1000	16x25	0.10	1510
	2200	18x36	0.12	2350
	3300	22x40	0.14	3200
100 (125)	10	5x11	0.08	80
		6.3x11	0.08	95
	22	6.3x11	0.08	140
		8x11	0.08	160
	33	8x11	0.08	200
	47	10x12.5	0.08	250
	68	10x15	0.08	315

Jamicon Series：SK
Teapo Series：SK

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms85℃) (120Hz)
100 (125)	100	10x20	0.08	450
	150	13x20	0.08	600
	220	13x25	0.08	790
	330	13x25	0.08	960
	470	16x25	0.08	1160
	680	16x36	0.08	1500
	1000	18x40	0.08	2220
160 (200)	1	5x11	0.15	20
		6.3x11	0.15	25
	2.2	6.3x11	0.15	37
	3.3	6.3x11	0.15	45
	4.7	6.3x11	0.15	55
	10	8x11	0.15	90
	22	10x15	0.15	150
	33	10x15	0.15	160
		10x20	0.15	210
	47	10x20	0.15	230
	68	13x20	0.15	255
	100	13x25	0.15	440
	150	16x25	0.15	570
	220	16x32	0.15	660
	330	18x36	0.15	1000
	470	22x40	0.15	1400
200 (250)	1	5x11	0.15	22
	2.2	6.3x11	0.15	39
	3.3	6.3x11	0.15	48
	4.7	6.3x11	0.15	55
	6.8	8x11	0.15	70
	10	8x11	0.15	80
	22	10x15	0.15	160
	33	10x20	0.15	210
	47	10x20	0.15	240
		13x20	0.15	290
	68	13x25	0.15	340
	100	16x25	0.15	470
	220	16x32	0.15	690
		18x25	0.15	665
	330	16x40	0.15	1000
		18x32	0.15	970
	470	18x40	0.15	1210
250 (300)	1	5x11	0.15	23
		6.3x11	0.15	29
	2.2	6.3x11	0.15	43
		8x11	0.15	48
	3.3	8x11	0.15	60
	4.7	8x11	0.15	75
	6.8	8x11	0.15	85
	10	10x12.5	0.15	105
	22	10x20	0.15	180
	33	13x20	0.15	270
	47	13x25	0.15	350

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms85℃) (120Hz)
250 (300)	100	16x25	0.15	485
	150	16x32	0.15	650
	220	18x36	0.15	900
350 (400)	1.0	6.3x11	0.20	25
	2.2	8x11	0.20	43
	3.3	8x11	0.20	45
	4.7	10x12.5	0.20	65
	10	10x15	0.20	100
	22	13x20	0.20	190
	33	13x25	0.20	250
	47	16x25	0.20	300
	100	16x36	0.20	510
		18x32	0.20	520
400 (450)	4.7	8x11	0.20	55
		10x12.5	0.20	65
	6.8	8x15	0.20	65
		10x12.5	0.20	70
	10	10x15	0.20	100
	22	13x20	0.20	190
	33	13x25	0.20	230
	47	16x25	0.20	290
	68	16x32	0.20	370
		18x25	0.20	350
	100	18x32	0.20	515
	150	18x40	0.20	700
450 (500)	2.2	10x12.5	0.20	45
	3.3	10x12.5	0.20	52
	4.7	10x12.5	0.20	58
	6.8	10x15	0.20	70
	10	13x20	0.20	130
	22	13x25	0.20	185
	33	16x25	0.20	250
	47	18x36	0.20	370
500(550)	4.7	10x12.5	0.24	40
	6.8	10x15	0.24	50
	10	10x20	0.24	70
	15	13x16	0.24	90
	22	13x25	0.24	130
	33	16x25	0.24	200
	47	18x32	0.24	230
550 (600)	4.7	10x12.5	0.24	45
	6.8	10x15	0.24	55
	10	10x20	0.24	75
	12	10x20	0.24	85
	15	13x16	0.24	100
	18	13x20	0.24	120
	22	13x25	0.24	145
	33	16x30	0.24	215
	47	18x32	0.24	250
	68	18x36	0.24	320
	82	18x40	0.24	360

Jamicon Series：TK
Teapo Series：SH Standard Series





■ Endurance: 105℃ 2000hours
■ Recommended Applications :For high quality , reliability application, high CV product
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics		
Category Temperature Range	-55~+105℃	-40~+105℃	-25~+105℃
Rated Voltage Range	6.3 ~ 100VDC	160 ~ 450VDC	500~550VDC
Rated Capacitance Range	1~ 22000 μF	1 ~ 470 μF	2.2~82 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)	± 20 % (120Hz , 20℃)	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.01CV or 3(μA)whichever is greater.	I=0.03CV+10(μA)	I=0.04CV+100(uA)
	(After rated voltage applied for 2 minutes)I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)		

Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)

WV	6.3	10	16	25	35	50	63~80	100	160~250	350~450	500~550
tan δ	0.24	0.20	0.17	0.15	0.12	0.10	0.10	0.08	0.15	0.20	0.25

When nominal capacitance is over 1000 μF,tan δ shall be added 0.02 to the listed value with increase of every 1000 μF.

Low Temperature Stability Impedance Ratio (MAX)

WV / Z(120Hz)	6.3	10	16	25	35~100	160~250	350~400	450	500~550
Z-25℃ / Z+20℃	4	3	2	2	2	3	4	4	6
Z-40℃ / Z+20℃	8	6	4	4	3	4	10	—	—

Endurance


After applying rated voltage with rated ripple current for 2000hours at 105℃, the capacitors shall meet the following requirements.

Capacitance change	Within ± 20% of initial value
D.F. (tan δ)	Not more than 200% of specified value
Leakage current	initial specified value or less

Shelf Life

The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

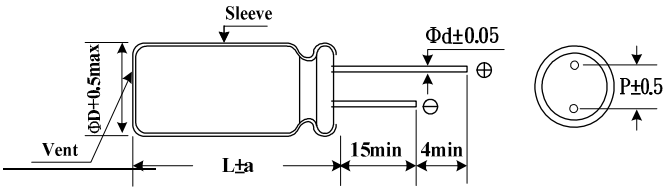

φD	5	6.3	8	10	13	16	18	22	25
p	2.0	2.5	3.5	5.0		7.5		10.0	12.5
φd	0.5	0.5	0.6	0.6		0.8		1.0	1.0
a	1.5	1.5	1.5	1.5	2.0	2.0	2.0	2.0	2.0

■ Multiplier for Ripple Current

Freq. (Hz)	60	120	1K	≧10K
6.3~25V	0.85	1.00	1.10	1.20
35 ~ 100V	0.80	1.00	1.15	1.25
160 ~ 200V	0.75	1.00	1.25	1.40
350 ~ 450V	0.70	1.00	1.30	1.80
500~550V	0.60	1.00	1.10	1.15

Jamicon Series：TK
Teapo Series：SH

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
6.3 (8)	100	5x11	0.24	110
	150	5x11	0.24	130
	220	6.3x11	0.24	180
	330	6.3x11	0.24	220
	470	6.3x11	0.24	270
	680	8x11	0.24	375
	1000	8x15	0.24	500
		10x12.5	0.24	520
	1500	10x15	0.24	600
	2200	10x20	0.26	850
	3300	13x20	0.28	1150
	4700	13x20	0.30	1350
	6800	13x25	0.34	1680
	10000	16x32	0.42	2250
	15000	16x36	0.52	2320
	22000	18x40	0.64	2810
10 (13)	47	5x11	0.20	80
	68	5x11	0.20	95
	100	5x11	0.20	120
	150	5x11	0.20	130
	220	6.3x11	0.20	190
	330	6.3x11	0.20	250
		8x11	0.20	275
	470	6.3x11	0.20	290
		8x11	0.20	315
	680	8x11	0.20	365
		10x12.5	0.20	420
	1000	8x15	0.20	505
		10x12.5	0.20	560
	1500	10x20	0.20	820
	2200	10x20	0.22	970
	3300	13x20	0.24	1280
	4700	13x25	0.26	1590
	6800	16x25	0.30	1940
	10000	16x36	0.38	2330
	15000	18x36	0.48	2710
16 (20)	33	5x11	0.17	75
	47	5x11	0.17	90
	68	5x11	0.17	105
	100	5x11	0.17	130
	150	6.3x11	0.17	180
	220	6.3x11	0.17	220
	330	8x11	0.17	310
	470	8x11	0.17	375
	680	8x15	0.17	465
		10x12.5	0.17	485
	1000	10x15	0.17	650
	1500	10x20	0.17	900
	2200	13x20	0.19	1180
	3300	13x25	0.21	1510
	4700	16x25	0.23	1830
	6800	16x32	0.27	2120
	10000	18x36	0.35	2590
25 (32)	22	5x11	0.15	65
	33	5x11	0.15	80
	47	5x11	0.15	95
	68	6.3x11	0.15	125
	100	6.3x11	0.15	160
	150	8x11	0.15	220
	220	8x11	0.15	270
	330	8x11	0.15	330
		10x12.5	0.15	375

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
25 (32)	470	8x15	0.15	420
		10x12.5	0.15	440
	680	10x15	0.15	560
	1000	10x20	0.15	790
	1500	13x20	0.15	1050
	2200	13x25	0.17	1370
	3300	16x25	0.19	1500
	4700	16x32	0.21	1990
	6800	18x36	0.25	2480
35 (44)	10	5x11	0.12	49
	15	5x11	0.12	60
	22	5x11	0.12	70
	33	5x11	0.12	90
	47	5x11	0.12	110
	68	6.3x11	0.12	140
	100	6.3x11	0.12	170
	150	8x11	0.12	235
	220	10x12.5	0.12	330
	330	10x12.5	0.12	410
	470	10x15	0.12	530
	680	10x20	0.12	720
	1000	13x20	0.12	1020
	1500	13x25	0.12	1350
	2200	16x25	0.14	1640
	3300	16x36	0.16	2070
	4700	18x36	0.18	2410
50 (63)	3.3	5x11	0.10	31
	4.7	5x11	0.10	36
	6.8	5x11	0.10	40
	10	5x11	0.10	55
	15	5x11	0.10	65
	22	5x11	0.10	80
	33	5x11	0.10	95
	47	6.3x11	0.10	130
	68	8x11	0.10	180
	100	8x11	0.10	220
	150	10x12.5	0.10	310
	220	10x12.5	0.10	370
		10x15	0.10	415
	330	10x20	0.10	535
	470	10x20	0.10	660
		13x20	0.10	760
	680	13x20	0.10	850
	1000	13x25	0.10	1210
	1500	16x25	0.10	1500
	2200	16x32	0.12	1850
		16x36	0.12	1950
	3300	18x36	0.14	2360
	4700	18x45	0.16	2500
63 (79)	10	5x11	0.10	55
	15	5x11	0.10	65
	22	6.3x11	0.10	90
	33	6.3x11	0.10	110
	47	8x11	0.10	155
	68	10x12.5	0.10	205
	100	10x12.5	0.10	260
	150	10x15	0.10	330
	220	10x20	0.10	465
	330	13x20	0.10	650
	470	13x20	0.10	750
	680	16x25	0.10	1000
	1000	16x32	0.10	1380

Jamicon Series：TK
Teapo Series：SH

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
63 (79)	1500	16x36	0.10	1650
	2200	18x36	0.12	2080
100 (125)	10	6.3x11	0.08	65
	15	6.3x11	0.08	75
	22	8x11	0.08	115
	33	8x11	0.08	140
	47	10x12.5	0.08	190
	68	10x15	0.08	240
	100	10x20	0.08	340
	150	13x20	0.08	480
	220	13x25	0.08	630
	330	16x25	0.08	830
	470	16x32	0.08	1000
	680	16x36	0.08	1200
160 (200)	1	5x11	0.15	17
	2.2	6.3x11	0.15	26
	3.3	6.3x11	0.15	36
	4.7	6.3x11	0.15	43
	6.8	8x11	0.15	54
	10	8x11	0.15	70
	15	10x12.5	0.15	90
	22	10x15	0.15	115
	33	10x20	0.15	160
	47	10x20	0.15	195
	68	13x20	0.15	260
	100	13x25	0.15	350
	150	16x25	0.15	435
	220	16x32	0.15	560
	330	18x36	0.15	800
	470	18x40	0.15	970
200 (250)	1	6.3x11	0.15	19
	2.2	6.3x11	0.15	28
	3.3	6.3x11	0.15	36
	4.7	8x11	0.15	50
	6.8	8x11	0.15	60
	10	10x12.5	0.15	80
	15	10x15	0.15	110
	22	10x20	0.15	140
	33	13x20	0.15	200
	47	13x20	0.15	245
	68	13x25	0.15	310
	100	16x25	0.15	390
	150	16x32	0.15	480
	220	16x36	0.15	675
		18x32	0.15	685
	330	18x36	0.15	840
250 (300)	1	6.3x11	0.15	21
	2.2	6.3x11	0.15	31
	3.3	8x11	0.15	44
	4.7	8x11	0.15	52
	6.8	8x11	0.15	62
	10	10x12.5	0.15	85
	15	10x15	0.15	110
	22	10x20	0.15	140
	33	13x20	0.15	210
	47	13x25	0.15	280
	68	13x25	0.15	310
	100	16x25	0.15	420
	150	16x32	0.15	550
	220	18x36	0.15	740
350 (400)	1	6.3x11	0.20	18
	2.2	8x11	0.20	31
350 (400)	3.3	8x11	0.20	37
	4.7	8x11	0.20	45
	10	10x15	0.20	80
	22	13x20	0.20	150
	33	13x25	0.20	200
	47	16x25	0.20	260
	100	18x32	0.20	410
400 (450)	1	6.3x11	0.20	17
	2.2	8x11	0.20	32
	3.3	8x11	0.20	39
	4.7	8x11	0.20	46
		10x12.5	0.20	55
	6.8	8x15	0.20	60
		10x12.5	0.20	65
	10	10x15	0.20	85
	15	10x20	0.20	100
	22	13x20	0.20	155
	33	13x25	0.20	200
	47	16x25	0.20	270
	68	16x32	0.20	410
		18x25	0.20	390
	100	18x32	0.20	500
	120	18x32	0.20	520
		18x36	0.20	550
	150	18x40	0.20	620
420 (470)	1	6.3x11	0.20	17
	2.2	8x11	0.20	29
	3.3	8x11	0.20	34
	4.7	10x12.5	0.20	55
	6.8	10x15	0.20	68
	10	10x20	0.20	98
	15	13x20	0.20	130
	22	13x25	0.20	155
	33	16x25	0.20	205
	47	16x25	0.20	235
	68	16x32	0.20	400
		18x25	0.20	380
	100	18x36	0.20	490
	120	18x40	0.20	530
	150	18x45	0.20	570
450 (500)	1.0	6.3x11	0.20	18
		8x11	0.20	22
	2.2	8x11	0.20	30
		10x12.5	0.20	37
	3.3	8x15	0.20	42
		10x12.5	0.20	40
	4.7	10x12.5	0.20	52
	6.8	10x15	0.20	62
	10	10x20	0.20	85
	15	13x20	0.20	120
	22	13x25	0.20	160
	33	16x25	0.20	210
	47	16x25	0.20	260
	68	18x32	0.20	370
	100	18x36	0.20	495
	120	18x40	0.20	565
	150	18x45	0.20	650
500 (550)	2.2	8x11	0.25	25
	3.3	8x16	0.25	30
	4.7	8x16	0.25	34
		10x12.5	0.25	38
	6.8	10x15	0.25	50

Jamicon Series：TK
Teapo Series：SH

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
500 (550)	8.2	10x16	0.25	60
	10	10x20	0.25	70
		13x16	0.25	80
	15	13x20	0.25	90
	18	13x20	0.25	100
	22	13x25	0.25	115
		16x20	0.25	120
	33	18x25	0.25	180
	47	16x32	0.25	180
		18x30	0.25	230
	68	18x32	0.25	250
	82	18x40	0.25	335
550 (600)	4.7	10x12.5	0.25	35
	5.6	10x12.5	0.25	45
	6.8	10x15	0.25	55

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
550 (600)	8.2	10x15	0.25	60
		13x16	0.25	70
	10	10x20	0.25	75
		13x16	0.25	80
	12	10x20	0.25	85
		13x16	0.25	90
	15	13x20	0.25	95
	18	13x20	0.25	120
	22	13x25	0.25	140
	33	16x30	0.25	180
	47	16x32	0.25	250
		18x30	0.25	260
	68	18x36	0.25	330
	82	18x40	0.25	380

Jamicon Series：SZ
Teapo Series：SZ Ultra low impedance Series






■ Endurance: 105℃ 2000 hours
■ Recommended Applications : Applicable for switching regulator of computer, especially for high frequency
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃
Rated Voltage Range	6.3 ~ 16VDC
Rated Capacitance Range	470 ~ 3300 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.03CV or 3(μA)whichever is greater , (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 6.3 / 10 / 16 tan δ: 0.22 / 0.19 / 0.16 When nominal capacitance is over 1000 μF,tan δ shall be added 0.02 to the listed value with increase of every 1000 μF.
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120Hz): 6.3 / 10 / 16 Z-25℃ / Z+20℃: 4 / 3 / 2 Z-40℃ / Z+20℃: 8 / 6 / 4
Endurance	After applying rated voltage with ripple current for 2000 hours at 105℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 25% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

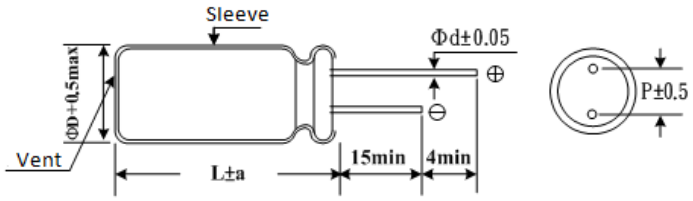

ΦD	8	10	12.5
P	3.5	5	5
Φd	0.6	0.6	0.6
a	1.5	1.5	2.0

■ Multiplier for Ripple Current

Freq. (Hz)	120	1K	10K	100K
Factor	0.5	0.8	0.9	1.0


Jamicon Series：SZ
Teapo Series：SZ

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (mΩ,20℃) (100KHz)
6.3V (8)	820	8 x 11	1036	43
	1200	8 x 15	1355	34
	1500	8 x 20	1740	25
		10 x 12.5	1400	31
	1800	10 x 16	1818	23
	2200	10 x 20	2318	15
	3300	10 x 25	2364	14
10V (13)	680	8 x 11	1036	43
	1000	8 x 15	1355	34
		10 x 12.5	1400	31
	1500	8 x 20	1700	25

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (mΩ,20℃) (100KHz)
10V (13)	1500	10 x 16	1818	23
	1800	10 x 20	2318	16
	2200	10 x 25	2545	14
16V (20)	470	8 x 11	1036	43
	680	8 x 15	1355	34
		10 x 12.5	1400	31
	1000	8 x 20	1700	25
		10 x 16	1818	23
	1500	10 x 20	2318	16
	1800	10 x 25	2546	14

Jamicon Series：MZ
Teapo Series：MZ Uitra low impedance

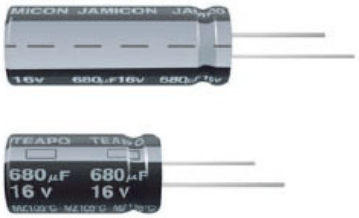


■ Endurance: 105℃ 2000 hours
■ Recommended Applications : Applicable for switching regulator of computer, especially for high frequency
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃
Rated Voltage Range	6.3 ~ 25VDC
Rated Capacitance Range	470 ~ 4700 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.03CV or 3(μA)whichever is greater,(After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 6.3 / 10 / 16 / 25 tan δ: 0.22 / 0.19 / 0.16 / 0.16 When nominal capacitance is over 1000 μF,tan δ shall be added 0.02 to the listed value with increase of every 1000 μF.
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120Hz): 6.3 / 10 / 16 / 25 Z-25℃ / Z+20℃: 4 / 3 / 2 / 2 Z-40℃ / Z+20℃: 8 / 6 / 4 / 4
Endurance	After applying rated voltage with ripple current for 2000 hours at 105℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 25% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

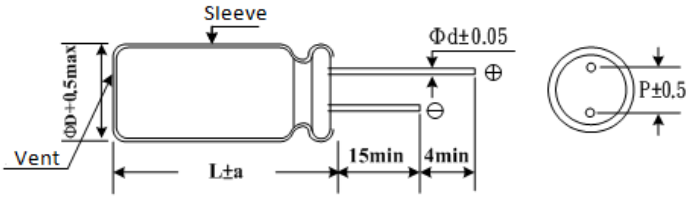

ΦD	8	10	12.5
P	3.5	5.0	5.0
Φd	0.6	0.6	0.6
a	1.5	1.5	2.0

■ Multiplier for Ripple Current

Freq. (Hz)	120	1K	10K	100K
Factor	0.5	0.8	0.9	1.0


Jamicon Series：MZ
Teapo Series：MZ

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (mΩ,20℃) (100KHz)
6.3V（8）	820	8x11	1230	40
	1000	8x16	1560	31
	1200	8x16	1710	31
	1500	8x20	2040	22
		10x12.5	1760	26
	1800	10x16	2140	20
	2200	10x20	2530	15
	3300	10x23	3110	13
	3900	10x26	3480	13
	4700	12.5x26	3810	14
10V（13）	680	8x14	1230	40
	1000	8x16	1660	31
		10x12.5	1700	29

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (mΩ,20℃) (100KHz)
10V（13）	1500	8x20	2150	21
		10x16	2200	21
	1800	10x20	2660	14
	2200	10x23	3000	13
16V（20）	470	8x11	1160	40
	680	8x16	1610	31
		10x12.5	1640	29
	1000	8x20	2160	21
		10x16	2210	21
	1500	10x20	2830	14
	1800	10x23	3300	13
25V（33）	470	10x16	2030	29

Jamicon Series：WL
Teapo Series：WL Low impedance

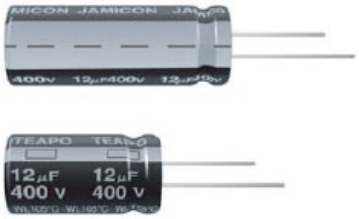


■ Endurance: 105℃ 1000~2000hours
■ Recommended Applications : High quality, high reliability, CV products, dedicated to mobile phone charger.
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-55~+105℃
Rated Voltage Range	6.3 ~ 63VDC
Rated Capacitance Range	4.7 ~ 10000μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.01CV or 3μA ,whichever is greater. (After rated voltage applied for 3 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tanδ) (120Hz ,20℃)	WV: 6.3 / 10 / 16 / 25 / 35 / 50 / 63 tanδ: 0.22 / 0.19 / 0.16 / 0.14 / 0.12 / 0.10 / 0.10 When nominal capacitance is over 1000μF,tanδ shall be added 0.02 to the listed value with increase of every 1000μF
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120Hz): 6.3 / 10 / 16 / 25 / 35 / 50 / 63 Z-25℃ / Z+20℃: 3 / 3 / 3 / 2 / 2 / 2 / 2 Z-55℃ / Z+20℃: 6 / 6 / 6 / 4 / 4 / 4 / 4
Endurance	After applying rated voltage with rated ripple current for1000（≥10φ2000）hours at 105℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 20% of initial value D.F. (tanδ): Not more than 200% of specified value Leakage current: Not more than the specified value DΦ / 寿命时间: ≦8Φ 1000小时; ≧10Φ 2000小时
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

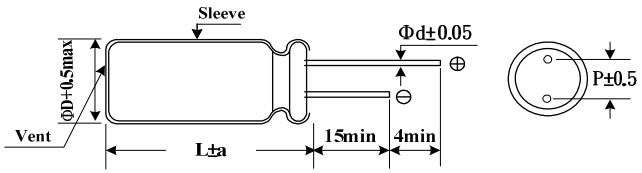

φD	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
a	1.5	1.5	1.5	1.5	2.0	2.0	2.0

■ Multiplier for Ripple Current

WV \ Freq. (Hz)	60	120	400	1K	10K	100K
10 ~ 16V	0.45	0.60	0.83	0.94	0.98	1.00
25 ~ 35V	0.38	0.50	0.75	0.9	0.97	1.00
50V	0.36	0.46	0.70	0.88	0.94	1.00

Jamicon Series：WL
Teapo Series：WL

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms 105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)	Impedance (Ω,-10℃) (100KHz)
6.3V (8)	150	5x11	250	0.219	0.656
	180	5x11	270	0.190	0.571
	220	5x11	300	0.162	0.487
	270	5x15	380	0.148	0.444
		6.3x15	380	0.148	0.444
	330	5x15	420	0.130	0.389
		6.3x11	420	0.130	0.389
	390	6.3x15	520	0.117	0.351
		8x11	530	0.117	0.351
	470	6.3x15	570	0.106	0.319
		8x11	580	0.106	0.319
	560	6.3x15	620	0.094	0.283
		8x11	630	0.094	0.283
	680	6.3x15	680	0.084	0.252
		8x11	700	0.084	0.252
	820	8x15	860	0.077	0.230
		10x12.5	900	0.077	0.230
	1000	8x15	950	0.069	0.206
		10x12.5	990	0.069	0.206
	1200	8x20	1180	0.059	0.178
		10x16	1210	0.059	0.178
	1500	10x20	1450	0.036	0.107
		12.5x15	1390	0.036	0.089
	1800	10x20	1590	0.031	0.094
		12.5x15	1520	0.031	0.078
	2200	10x25	1880	0.028	0.083
		12.5x18	1770	0.028	0.069
	2700	10x28	2140	0.025	0.075
		16x15	1870	0.025	0.063
	3300	12.5x20	2150	0.023	0.058
		16x15	2010	0.023	0.058
	3900	12.5x25	2520	0.022	0.055
		18x15	2190	0.022	0.055
	4700	12.5x30	2860	0.021	0.053
		16x20	2520	0.021	0.053
	5600	12.5x35	3060	0.020	0.050
		16x25	2900	0.020	0.050
	6800	12.5x40	3450	0.019	0.047
		18x20	2850	0.019	0.047
	8200	16x32	3540	0.018	0.045
		18x25	3260	0.018	0.045
	10000	16x36	3880	0.017	0.043
		18x32	3740	0.017	0.043
10V (13)	100	5x11	230	0.312	0.937
	120	5x11	250	0.266	0.798
	150	5x11	280	0.218	0.653
	180	5x15	360	0.189	0.568
		6.3x11	350	0.189	0.568
	220	5x15	400	0.161	0.484
		6.3x11	390	0.161	0.484
	270	5x15	440	0.147	0.442
		6.3x11	430	0.147	0.442
	330	6.3x15	550	0.129	0.387
		8x11	560	0.129	0.387
	390	6.3x15	600	0.116	0.349
		8x11	610	0.116	0.349
	470	6.3x15	660	0.106	0.317
		8x11	670	0.106	0.317
	560	6.3x15	720	0.094	0.281
		8x11	730	0.094	0.281
	680	8x15	900	0.083	0.250
		10x12.5	950	0.083	0.250

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms 105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)	Impedance (Ω,-10℃) (100KHz)
10V (13)	820	8x15	990	0.076	0.228
		10x12.5	1040	0.076	0.228
	1000	8x20	1240	0.068	0.204
		10x16	1280	0.068	2.024
	1200	10x20	1540	0.059	0.177
		12.5x15	1480	0.059	0.148
	1500	10x25	1830	0.035	0.106
		12.5x18	1720	0.035	0.089
	1800	10x25	2000	0.031	0.094
		12.5x18	1880	0.031	0.078
	2200	10x28	2250	0.027	0.082
		16x15	1960	0.027	0.068
	2700	12.5x20	2250	0.025	0.062
		16x15	2100	0.025	0.062
	3300	12.5x25	2650	0.023	0.057
		18x15	2300	0.023	0.057
	3900	12.5x30	3030	0.022	0.055
		16x20	2670	0.022	0.055
	4700	12.5x35	3210	0.021	0.053
		16x25	3050	0.021	0.053
	5600	12.5x40	3550	0.020	0.049
		18x20	2940	0.020	0.049
	6800	16x32	3680	0.019	0.047
		18x25	3390	0.019	0.047
	8200	16x36	4010	0.018	0.044
		18x32	3870	0.018	0.044
	10000	18x36	4190	0.017	0.042
16V (20)	56	5x11	190	0.253	0.759
	68	5x11	210	0.221	0.662
	82	5x11	230	0.203	0.610
	100	5x11	250	0.183	0.550
	120	5x15	320	0.156	0.469
		6.3x11	320	0.156	0.469
	150	5x15	360	0.128	0.383
		6.3x11	350	0.128	0.383
	180	5x15	390	0.111	0.333
		6.3x11	390	0.111	0.333
	220	5x15	430	0.095	0.284
		6.3x11	430	0.095	0.284
	270	6.3x15	550	0.086	0.259
		8x11	550	0.086	0.259
	330	6.3x15	600	0.086	0.227
		8x11	610	0.086	0.227
	390	8x15	750	0.068	0.205
		10x12.5	790	0.068	0.205
	470	8x15	820	0.062	0.186
		10x12.5	860	0.062	0.186
	560	8x20	1020	0.055	0.165
		10x16	1050	0.055	0.165
	680	8x20	1120	0.049	0.147
		10x16	1150	0.049	0.147
	820	8x20	1230	0.045	0.134
		10x16	1270	0.045	0.134
	1000	10x20	1540	0.040	0.120
		12.5x15	1480	0.040	0.100
	1200	10x25	1870	0.035	0.107
		12.5x18	1750	0.035	0.087
	1500	10x28	2100	0.029	0.088
		16x15	1830	0.029	0.074
	1800	12.5x20	2140	0.026	0.065
		16x15	2000	0.026	0.065
	2200	12.5x25	2500	0.023	0.057

Jamicon Series：WL
Teapo Series：WL

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size Φ DxL(mm)	Ripple current (mA/rms 105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)	Impedance (Ω,-10℃) (100KHz)
16V (20)	2200	18x15	2170	0.023	0.057
	2700	12.5x30	2890	0.021	0.052
		16x20	2540	0.021	0.052
	3300	12.5x35	3130	0.019	0.048
		16x25	2970	0.019	0.048
	3900	12.5x40	3500	0.018	0.046
		18x20	2900	0.018	0.046
	4700	16x32	3560	0.016	0.040
		18x25	3280	0.016	0.040
	5600	16x36	3880	0.015	0.038
		18x32	3740	0.015	0.038
25V (32)	47	5x11	220	0.283	0.085
	56	5x11	240	0.253	0.758
	68	5x11	270	0.020	0.661
	82	5x15	340	0.203	0.609
		6.3x11	330	0.203	0.609
	100	5x15	370	0.183	0.549
		6.3x11	370	0.183	0.549
	120	5x15	410	0.156	0.468
		6.3x11	400	0.156	0.468
	150	6.3x15	510	0.128	0.383
		8x11	520	0.128	0.383
	180	6.3x15	560	0.111	0.333
		8x11	570	0.111	0.333
	220	6.3x15	620	0.095	0.284
		8x11	630	0.095	0.284
	270	8x15	790	0.086	0.259
		10x12.5	830	0.086	0.259
	330	8x15	870	0.076	0.227
		10x12.5	910	0.076	0.227
	390	8x20	1080	0.068	0.205
		10x16	1100	0.068	0.205
	470	8x20	1180	0.062	0.186
		10x16	1210	0.062	0.186
	560	8x20	1290	0.055	0.165
		10x16	1320	0.055	0.165
	680	10x20	1610	0.049	0.147
		12.5x15	1550	0.049	0.122
	820	10x25	1950	0.045	0.134
		12.5x18	1830	0.045	0.110
	1000	10x28	2270	0.040	0.120
		16x15	1980	0.040	0.100
	1200	12.5x20	2320	0.035	0.104
		16x15	2170	0.035	0.087
	1500	12.5x25	2710	0.029	0.074
		18x15	2480	0.029	0.074
	1800	12.5x30	3230	0.026	0.065
		16x20	2840	0.026	0.065
	2200	12.5x35	3470	0.023	0.057
		16x25	3290	0.023	0.057
	2700	12.5x40	3910	0.021	0.052
		18x20	3240	0.021	0.052
	3300	16x32	4100	0.019	0.047
		18x25	3770	0.019	0.047
	3900	16x36	4530	0.018	0.046
		18x32	4360	0.018	0.046
	4700	18x36	4720	0.016	0.040
35V (44)	10	5x11	110	0.832	2.495
	15	5x11	120	0.610	1.829
	18	5x11	150	0.531	1.594
	22	5x11	160	0.454	1.361
	27	5x11	180	0.400	1.201

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size Φ DxL(mm)	Ripple current (mA/rms 105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)	Impedance (Ω,-10℃) (100KHz)
35V (44)	33	5x11	200	0.353	1.058
	39	5x11	210	0.320	0.096
	47	5x11	230	0.283	0.849
	56	5x15	290	0.252	0.757
		6.3x11	290	0.252	0.757
	68	5x15	320	0.220	0.660
		6.3x11	320	0.220	0.660
	82	5x15	360	0.203	0.608
		6.3x11	350	0.203	0.608
	100	6.3x15	450	0.183	0.549
		8x11	450	0.183	0.549
	120	6.3x15	490	0.109	0.327
		8x11	500	0.109	0.327
	150	6.3x15	550	0.089	0.268
		8x11	550	0.089	0.268
	180	8x15	680	0.078	0.233
		10x12.5	720	0.078	0.233
	220	8x15	750	0.066	0.198
		10x12.5	790	0.066	0.198
	270	8x20	950	0.060	0.181
		10x16	970	0.060	0.181
	330	8x20	1050	0.053	0.159
		10x16	1080	0.053	0.159
	390	10x20	1290	0.048	0.143
		12.5x15	1240	0.048	0.119
	470	10x20	1420	0.043	0.130
		12.5x15	1360	0.043	0.108
	560	10x25	1710	0.038	0.115
		12.5x18	1610	0.038	0.096
	680	10x28	1990	0.034	0.103
		16x15	1730	0.034	0.086
	820	10x30	2250	0.031	0.094
		16x15	1900	0.031	0.078
	1000	12.5x25	2480	0.028	0.070
		18x15	2150	0.028	0.070
	1200	12.5x30	2940	0.024	0.061
		16x20	2590	0.024	0.061
	1500	12.5x35	3160	0.021	0.051
		16x25	3000	0.021	0.051
	1800	12.5x40	3690	0.018	0.045
		18x20	3050	0.018	0.045
	2200	16x32	3810	0.016	0.040
		18x25	3510	0.016	0.040
50V (63)	4.7	5x11	85	1.061	3.182
	6.8	5x11	100	0.916	2.749
	10	5x11	130	0.831	2.493
	15	5x11	150	0.609	1.828
	18	5x11	170	0.531	1.593
	22	5x11	190	0.453	1.360
	27	5x11	210	0.100	1.200
	33	5x11	230	0.353	1.058
	39	5x15	290	0.320	0.959
		6.3x11	280	0.320	0.959
	47	5x15	310	0.283	0.849
		6.3x11	310	0.283	0.849
	56	5x15	340	0.252	0.757
		6.3x11	340	0.252	0.757
	68	6.3x15	430	0.220	0.660
		8x11	430	0.220	0.660
	82	6.3x15	470	0.203	0.608
		8x11	480	0.203	0.608
	100	8x15	590	0.183	0.548

Jamicon Series：WL
Teapo Series：WL

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size Φ DxL(mm)	Ripple current (mA/rms 105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)	Impedance (Ω,-10℃) (100KHz)
50V (63)	100	10x12.5	620	0.183	0.548
	120	8x15	650	0.109	0.327
		10x12.5	680	0.109	0.327
	150	8x20	820	0.089	0.268
		10x16	840	0.089	0.268
	180	8x20	900	0.078	0.233
		10x16	920	0.078	0.233
	220	8x20	1000	0.066	0.198
		10x16	1020	0.066	0.198
	270	10x20	1250	0.060	0.181
		12.5x15	1200	0.060	0.151
	330	10x25	1530	0.053	0.159
		12.5x18	1430	0.053	0.132
	390	10x25	1660	0.048	0.143
		12.5x18	1560	0.048	0.119
	470	12.5x20	1790	0.043	0.108
		16x15	1680	0.043	0.108
	560	12.5x25	2150	0.038	0.096
		18x15	1870	0.038	0.096
	680	12.5x30	2580	0.034	0.086
		16x20	2260	0.034	0.086

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size Φ DxL(mm)	Ripple current (mA/rms 105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)	Impedance (Ω,-10℃) (100KHz)
50V (63)	820	12.5x35	2880	0.031	0.078
		16x25	2730	0.031	0.078
	1000	12.5x40	3390	0.028	0.070
		18x20	2800	0.028	0.070
	1200	16x32	3660	0.024	0.061
		18x25	3370	0.024	0.061
	1500	16x36	4040	0.021	0.051
		18x32	3890	0.021	0.051
63V (79)	10	5x11	130	0.997	2.991
	22	5x11	190	0.544	1.632
		6.3x11	210	0.544	1.632
	33	5x15	260	0.423	1.269
		6.3x11	260	0.423	1.269
	47	8x11	360	0.339	1.018
	68	8x15	490	0.220	0.660
	100	10x12.5	620	0.183	0.548
	220	10x20	1130	0.094	0.283
	330	10x30	1660	0.076	0.227
	470	12.5x25	1970	0.062	0.155
	680	12.5x35	2760	0.039	0.098
	1000	16x25	3020	0.032	0.080

Jamicon Series：TL
Teapo Series：SJ

Low impedance、High Ripple Series





■ Endurance: 105℃, 1000～5000 hours


■ Recommended Applications : Applying to AV(TV, video, audio), monitor /computer, OA/HA /communication, transducer/inverter, adapter, switching power supply

■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃
Rated Voltage Range	6.3 ~ 100VDC
Rated Capacitance Range	5.6 ~ 6800 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I≦0.01CV or 3 μA ,whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 6.3 / 10 / 16 / 25 / 35 / 50 / 63 / 100 tan δ: 0.22 / 0.19 / 0.16 / 0.14 / 0.12 / 0.10 / 0.09 / 0.08 When nominal capacitance is over 1000 μF,tan δ shall be added 0.02 to the listed value with increase of every 1000 μF.
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120Hz): 6.3 / 10 / 16 / 25 / 35 / 50 / 63 / 100 Z(-25℃) / Z(20℃): 4 / 3 / 2 / 2 / 2 / 2 / 2 / 2 Z(-40℃) / Z(20℃): 8 / 6 / 4 / 3 / 3 / 3 / 3 / 3
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20℃ after subjected to DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for the specified period of time at 105℃. Capacitance change: Within ± 25% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: Not more than the specified value Case size (Φ) / Life time (hours): L=7: 1000 L≧11, ΦD≦6.3: 2000 L≧11, ΦD = 8: 3000 L≧11, ΦD = 10: 5000
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours (L=7mm is 500Hours) at 105℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

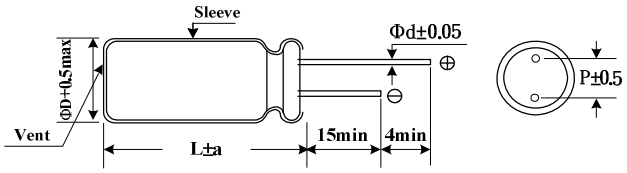

ΦD	4	5	6.3	8	10	13	16	18
P	1.5	2	2.5	3.5	5.0	5.0	7.5	7.5
Φd	0.45	0.5 (0.45)	0.5 (0.45)	0.6 (0.5)	0.6	0.6	0.8	0.8
a	1.0	1.5 (1.0)	1.5 (1.0)	1.5 (1.0)	1.5	2.0	2.0	2.0

( ) : L = 7

■ Multiplier for Ripple Current

Freq. (Hz)	60	120	400	1K	10K	100K
6.3~16V	0.45	0.60	0.83	0.94	0.98	1.00
25~35V	0.38	0.50	0.75	0.90	0.97	1.00
50~63V	0.36	0.46	0.70	0.88	0.94	1.00
100V	0.34	0.44	0.65	0.86	0.92	1.00

Jamicon Series：TL

Teapo Series：SJ

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Impedance (Ω,20℃) (100KHz)	Ripple current (mA/rms105℃) (100KHz)
6.3V (8)	39	4x7	0.85	130
	47	5x7	0.7	175
	56	5x7	0. 56	190
	68	5x7	0.43	210
	100	5x11	0.30	250
		6.3x7	0.35	240
	120	5x11	0.38	220
		6.3x7	0.29	270
	150	5x11	0.3	250
		6.3x7	0.23	300
	180	8x7	0.18	350
	220	6.3x11	0.13	410
	270	6.3x11	0.16	430
	330	8x11	0.13	540
	470	8x11	0.072	760
	560	8x11	0.072	790
	680	8x15	0.062	1000
	820	8x15	0.056	1045
	1000	8x20	0.053	1250
	1200	8x20	0.041	1529
		10x20	0.038	1820
	1500	10x25	0.026	2150
	1800	10x25	0.025	2240
	2200	12.5x20	0.021	2360
	2700	13x20	0.022	2540
	3300	12.5x25	0.018	2770
	3900	12.5x30	0.016	3290
	4700	12.5x35	0.015	3400
	5600	13x35	0.015	3400
		16x25	0.016	3460
	6800	16x25	0.016	3620
10V (13)	27	4x7	0.89	130
	33	5x7	0.75	160
	39	5x7	0.64	175
	47	5x7	0.53	190
	56	5x7	0.44	210
	68	6.3x7	0.44	210
	100	6.3x7	0.3	260
	120	6.3x7	0.23	300
	150	8x7	0.18	370
	180	8x7	0.15	380
	220	6.3x11	0.13	410
	270	8x11	0.12	580
	330	8x11	0.11	640
	470	8x11	0.072	760
	560	8x15	0.068	1000
		10x12.5	0.064	940
	680	10x12.5	0.053	1030
	820	8x20	0.05	1130
		10x16	0.046	1300
	1000	8x20	0.041	1250
		10x16	0.038	1430
	1200	10x20	0.023	1820
	1500	10x25	0.022	2150
	1800	13x20	0.022	2230
	2200	13x20	0.021	2360
	2700	13x25	0.02	2510
	3300	13x25	0.018	2770
	3900	13x30	0.016	3290
		16x20	0.018	3140
	4700	13x35	0.015	3400
	5600	16x25	0.016	3695

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Impedance (Ω,20℃) (100KHz)	Ripple current (mA/rms105℃) (100KHz)
16V (20)	18	4x7	0.92	130
	27	5x7	0.61	190
	33	5x7	0.45	210
	39	5x11	0.43	220
	47	5x11	0.36	230
	56	5x11	0.30	250
	68	6.3x7	0.24	300
	100	6.3x11	0.16	370
		8x7	0.18	350
	120	6.3x11	0.13	410
		8x7	0.15	380
	150	8x11	0.12	510
	180	8x11	0.11	560
	220	8x11	0.10	620
	270	8x11	0.088	690
	330	8x11	0.072	760
	470	8x15	0.056	1000
		10x12.5	0.053	1030
	560	8x20	0.049	1140
		10x16	0.046	1300
	680	8x20	0.041	1250
		10x16	0.038	1430
	820	10x20	0.032	1650
	1000	10x20	0.023	1820
	1200	10x25	0.022	2150
	1500	13x20	0.021	2360
	1800	13x25	0.02	2510
	2200	13x25	0.018	2770
	2700	13x30	0.016	3290
		16x20	0.018	3140
	3300	13x35	0.015	3400
	3900	16x25	0.016	3460
25V (32)	15	4x7	0.94	130
	18	5x7	0.69	170
	27	5x7	0.46	210
	33	5x11	0.42	220
	39	5x11	0.36	230
	47	5x11	0.30	250
	56	6.3x7	0.24	300
	68	6.3x11	0.19	340
		8x7	0.22	340
	100	6.3x11	0.13	410
		8x7	0.15	440
	120	8x11	0.12	560
	150	8x11	0.105	630
	180	8x11	0.088	690
	220	8x11	0.072	760
	270	8x15	0.068	900
		10x12.5	0.065	930
	330	10x12.5	0.053	1030
	470	8x20	0.041	1250
		10x16	0.038	1430
	560	10x20	0.032	1650
	680	10x20	0.023	1820
	820	10x25	0.022	2150
	1000	13x20	0.021	2360
	1200	13x25	0.02	2510
	1500	13x25	0.018	2770
	1800	13x30	0.016	3290
		16x20	0.018	3140
	2200	13x35	0.015	3400
	2700	16x25	0.016	3520

Jamicon Series：TL

Teapo Series：SJ

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Impedance (Ω,20℃) (100KHz)	Ripple current (mA/rms105℃) (100KHz)
35V (44)	10	4x7	0.96	130
	15	5x7	0.57	190
	18	5x7	0.47	210
	27	5x11	0.37	230
	33	5x11	0.30	250
	39	6.3x7	0.25	300
	47	6.3x11	0.15	380
		8x7	0.19	350
	56	6.3x11	0.13	410
		8x7	0.16	380
	68	8x11	0.12	510
	100	8x11	0.105	620
	120	8x11	0.088	680
	150	8x11	0.072	760
	180	8x15	0.068	910
		10x12.5	0.065	930
	220	10x12.5	0.053	1030
	270	8x20	0.041	1250
	330	10x16	0.038	1430
	470	10x20	0.023	1820
	560	10x25	0.022	2150
	680	13x20	0.021	2360
	820	13x25	0.020	2510
	1000	13x25	0.018	2770
	1200	13x30	0.016	3290
		16x20	0.018	3140
	1500	13x35	0.015	3400
	1800	16x25	0.016	3460
50V (63)	5.6	4x7	1	130
	6.8	5x7	0.74	170
	10	5x7	0.5	210
	15	6.3x7	0.38	220
		5x11	0.48	215
	22	5x11	0.34	240
		6.3x7	0.26	300
	27	8x7	0.21	340
	33	8x7	0.17	380
	39	6.3x11	0.16	330
	47	6.3x11	0.15	360
	56	6.3x11	0.14	390
	68	8x11	0.11	600
	82	8x11	0.09	660
	100	8x11	0.074	730
	120	8x15	0.061	950
	150	10x12.5	0.061	980
	180	8x20	0.046	1190
	220	10x16	0.042	1370
	270	10x20	0.03	1580
	330	10x25	0.028	1870
	390	13x20	0.028	1870
	470	13x20	0.027	2050
	560	13x25	0.023	2410
	680	13x30	0.021	2860
	820	13x35	0.019	2960
		16x20	0.023	2730
	1000	16x32	0.021	3350
63V (79)	15	5x11	1.19	136
	22	6.3x11	0.726	220
	27	6.3x11	0.58	240
	33	6.3x11	0.56	300

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Impedance (Ω,20℃) (100KHz)	Ripple current (mA/rms105℃) (100KHz)
63V (79)	39	8x11	0.42	308
	47	8x11	0.35	380
	56	8x11	0.35	420
	68	8x15	0.26	488
		10x12.5	0.24	500
	82	8x15	0.22	536
		10x12.5	0.20	552
	100	10x16	0.16	640
	120	8x20	0.16	656
		10x16	0.15	760
	150	10x20	0.13	808
		13x16	0.13	832
	180	10x20	0.11	900
		13x16	0.11	912
	220	10x25	0.099	1080
	270	13x20	0.081	1200
	330	13x25	0.058	1480
	390	13x30	0.063	1640
		16x20	0.073	1448
	470	13x30	0.061	1800
		16x20	0.061	1592
	560	13x35	0.047	1960
		16x25	0.043	2190
	680	13x40	0.039	2224
		18x20	0.051	1960
	820	16x32	0.035	2720
		18x25	0.042	2480
	1000	16x36	0.028	3170
		18x32	0.034	3100
	1200	16x40	0.026	3270
		18x36	0.027	3300
	1500	18x40	0.024	3500
100V (125)	10	6.3x11	0.95	170
	15	6.3x 11	0.57	210
	22	8x11	0.44	330
	27	8x11	0.36	360
	33	8x15	0.3	375
	39	8x15	0.25	450
	47	10x12.5	0.24	450
	56	8x20	0.19	570
	68	10x16	0.18	580
	82	10x20	0.13	750
		13x16	0.13	740
	100	10x25	0.12	880
	120	13x20	0.094	1050
	150	13x25	0.085	1100
	180	13x25	0.071	1200
	220	13x30	0.063	1410
		16x20	0.071	1300
	270	13x35	0.052	1560
		16x25	0.053	1600
		18x20	0.069	1470
	330	13x40	0.046	1700
	390	16x32	0.041	1750
		18x25	0.049	1620
	470	16x36	0.033	1890
		18x32	0.039	1780
	560	16x40	0.03	2080
		18x36	0.031	2060
	680	18x40	0.028	2570

Jamicon Series：SC
Teapo Series：SC

Low impedance、High Ripple Series






- Endurance: 105℃ 2000~3000 hours
- Recommended Applications : Applicable for switching regulator of computer , especially for high frequency
- Corresponding product to RoHS

SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃
Rated Voltage Range	6.3 ~ 100VDC
Rated Capacitance Range	4.7 ~ 15000 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.01CV or 3 μA whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 6.3 / 10 / 16 / 25 / 35 / 50 / 63 / 100 tan δ: 0.22 / 0.19 / 0.16 / 0.14 / 0.12 / 0.10 / 0.09 / 0.08 When nominal capacitance is over 1000 μF,tan δ shall be added 0.02 to the listed value with increase of every 1000 μF.
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120Hz): 6.3 / 10 / 16 / 25 / 35 / 50 / 63 / 100 Z-25℃ / Z+20℃: 4 / 3 / 3 / 3 / 3 / 2 / 2 / 2 Z-40℃ / Z+20℃: 8 / 6 / 4 / 4 / 4 / 4 / 4 / 4
Endurance	After applying rated voltage with ripple current for 1000~3000 hours at 105℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: Not more than the specified value Case size (Φ): 5 x 11 ~ 10 x 12.5 / 10 x 15higher Life time (hours): 2000 / 3000
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

Dimensions [mm]

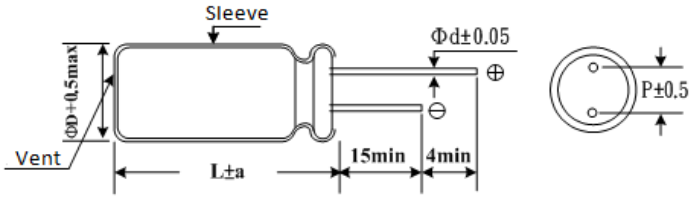

ΦD	5	6.3	8	10	13	16	18	22
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0
Φd	0.50	0.5	0.6	0.6	0.6	0.8	0.8	0.8
a	1.5	1.5	1.5	1.5	2.0	2.0	2.0	2.0

Multiplier for Ripple Current

Cap (μF) \ Freq. (Hz)	50	120	300	1K	10K	100K
≦ 4.7 μF	0.30	0.40	0.50	0.70	0.80	1.00
5.6 ~ 33 μF	0.40	0.50	0.60	0.80	0.90	1.00
34 ~ 330 μF	0.60	0.70	0.80	0.90	0.95	1.00
331 ~ 1000 μF	0.65	0.90	0.90	0.98	1.00	1.00
1200 μF Above	0.85	0.90	0.95	0.98	1.00	1.00

Jamicon Series：SC
Teapo Series：SC

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
6.3V（8）	100	5x11	130	0.630
	150	5x11	200	0.420
	220	6.3x11	250	0.320
	270	6.3x11	250	0.220
	330	6.3x11	250	0.230
		8x11	400	0.180
	470	6.3x11	440	0.180
		8x11	550	0.140
	680	8x11	580	0.120
		8x15	700	0.100
	820	8x20	750	0.085
	1000	8x11	580	0.150
		8x15	700	0.085
		8x20	800	0.069
		10x12.5	690	0.080
	1200	10x16	1000	0.064
	1500	8x15	980	0.085
		8x20	800	0.051
		10x16	1070	0.055
		10x20	1250	0.044
	2200	10x20	1220	0.051
		10x25	1310	0.048
		13x20	1450	0.043
	3300	10x25	1400	0.043
		13x25	1550	0.035
	3900	13x25	1600	0.034
	4700	13x30	1750	0.032
		13x25	1680	0.033
		16x25	1800	0.028
	6800	16x32	2000	0.024
	8200	16x32	2350	0.019
	10000	16x36	2550	0.019
	15000	18x36	3000	0.019
10V（13）	100	5x11	150	0.420
	120	5x11	200	0.370
	150	6.3x11	250	0.320
	220	6.3x11	300	0.220
	330	8x11	550	0.140
	470	8x11	550	0.120
		8x15	750	0.100
	680	8x11	640	0.110
		10x12.5	800	0.085
	820	10x16	1050	0.064
	1000	8x20	1080	0.065
		10x12.5	930	0.075
		10x16	990	0.085
		10x20	1100	0.050
	1200	10x20	1250	0.047
	1500	10x20	1330	0.044
	2200	10x20	1400	0.042
		10x25	1450	0.039
		13x20	1600	0.038
	3300	10x30	1740	0.032
		13x25	2000	0.028
	4700	13x25	1860	0.028
		16x25	2200	0.024
	6800	16x36	2550	0.019
	8200	18x36	2800	0.019
16V（20）	56	5x11	100	0.630
	68	5x11	150	0.420
	100	5x11	200	0.370
	120	6.3x11	250	0.320

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
16V（20）	150	6.3x11	300	0.220
	220	8x11	550	0.140
	330	8x11	550	0.120
		8x15	650	0.100
		10x12.5	688	0.080
	470	8x15	730	0.093
		10x12.5	800	0.085
	680	10x16	1050	0.064
	820	10x20	1100	0.044
	1000	10x16	1140	0.043
		10x20	1250	0.042
	1200	10x25	1310	0.039
		13x20	1450	0.038
	1500	10x20	1300	0.039
		13x20	1600	0.034
	2200	10x30	1780	0.032
		13x20	1720	0.033
		13x25	2000	0.028
	3300	13x40	2200	0.026
		16x25	2200	0.024
	4700	16x36	2550	0.019
	6800	18x36	2800	0.019
25V（32）	10	5x11	50	0.550
	47	5x11	150	0.450
	56	5x11	150	0.420
	68	6.3x11	200	0.370
	100	6.3x11	250	0.220
	120	8x11	300	0.200
	150	8x11	550	0.140
	220	8x11	550	0.120
		8x15	660	0.100
	330	8x15	750	0.100
		8x20	800	0.069
		10x16	900	0.086
	470	8x20	800	0.067
		10x12.5	760	0.086
		10x16	1050	0.064
	680	10x20	1100	0.047
	820	10x20	1160	0.045
	1000	10x20	1250	0.042
		10x25	1310	0.039
		13x20	1450	0.038
	1200	13x25	1600	0.035
	1500	13x30	1750	0.032
		16x25	2000	0.028
	2200	13x30	1810	0.029
		16x25	1660	0.032
		16x32	2200	0.024
	3300	16x36	2540	0.019
		18x36	2550	0.019
	4700	18x36	2800	0.019
	6800	18x36	2800	0.019
35V（44）	4.7	5x11	115	1.200
	6.8	5x11	120	1.000
	10	5x11	140	0.900
	15	5x11	170	0.690
	22	5x11	190	0.600
	33	5x11	200	0.580
	47	6.3x11	250	0.390
	68	6.3x11	300	0.220
	100	6.3x11	350	0.180
		8x11	450	0.140

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：SC
Teapo Series：SC

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
35V (44)	120	8x11	550	0.130
	150	8x15	650	0.100
	220	8x15	650	0.100
		10x12.5	800	0.069
	330	10x16	900	0.052
		10x20	1050	0.044
	470	10x20	1300	0.039
	680	13x20	1400	0.038
	820	13x20	1550	0.034
	1000	13x25	1700	0.029
	1200	16x25	1900	0.028
	1500	16x25	2100	0.024
	2200	16x32	2300	0.021
		16x36	2550	0.019
	3300	18x36	2880	0.019
50V (63)	4.7	5x11	115	2.000
	6.8	5x11	120	1.850
	10	5x11	140	1.700
	15	5x11	180	1.200
	22	5x11	200	0.700
	33	6.3x11	250	0.600
	47	6.3x11	300	0.520
	68	8x11	450	0.350
	100	8x11	450	0.290
		8x15	550	0.250
	120	8x20	650	0.210
	150	10x12.5	800	0.160
	220	10x16	1050	0.100
		10x25	1150	0.068
	330	10x20	1300	0.075
	470	10x20	1390	0.072
		13x20	1400	0.060
	680	13x25	1550	0.050
	820	16x25	1700	0.040

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
50V (63)	1000	16x25	1900	0.039
	1200	16x32	2100	0.025
	1500	16x36	2550	0.025
	2200	18x40	2800	0.025
63V (79)	10	5x11	140	1.850
	15	5x11	200	1.700
	22	6.3x11	250	1.200
	33	6.3x11	300	0.900
	47	8x11	450	0.700
	68	8x11	550	0.520
	100	8x20	650	0.350
	120	10x16	800	0.300
	150	10x16	1050	0.200
	220	10x20	1300	0.150
	330	13x20	1400	0.100
	470	13x25	1550	0.064
	680	16x25	1700	0.052
	820	16x32	1900	0.048
	1000	16x32	2100	0.042
	1200	16x36	2550	0.036
	1500	18x36	2800	0.033
100V (125)	10	6.3x11	200	1.500
	15	6.3x11	250	1.200
	22	8x11	300	0.790
	33	8x15	450	0.590
	47	10x16	550	0.350
	68	10x20	650	0.240
	100	13x20	800	0.180
	120	13x25	1050	0.150
	150	13x25	1300	0.110
	220	16x25	1400	0.071
	330	16x32	1550	0.049
	470	18x36	1770	0.038

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：WG
Teapo Series：WG Low impedance Series



■ Endurance: 105℃ 2000~3000hrs
■ Recommended Applications : Apply to the requirement of long life, low impedance, high reliability, etc.
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-55~ +105℃
Rated Voltage Range	10 ~ 100VDC
Rated Capacitance Range	47~4700 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I≤0.01CV (After rated voltage applied for 3 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)

Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)

WV	10	16	25	35	50	63	100
tan δ	0.12	0.1	0.09	0.08	0.07	0.06	0.06

Low Temperature Stability Impedance Ratio (MAX)

WV / Z(120Hz)	10~16	25~100
Z-25℃ / Z+20℃	3	2
Z-55℃ / Z+20℃	6	4

Endurance

After applying rated voltage with rated ripple current for2000（≧10φ3000）hours at 105℃, the capacitors shall meet the following requirements.


Capacitance change	Within ± 20% of initial value
D.F. (tan δ)	Not more than 200% of specified value
Leakage current	

Shelf Life

The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

Capacitance change	Within ± 20% of initial value
D.F. (tan δ)	Not more than 200% of specified value
Leakage current	Not more than the specified value

■ Dimensions [mm]

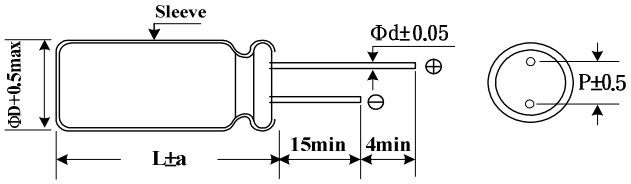

Vent only for 8Φ

ΦD	8	10	12.5	16	18
P	3.5	5.0	5.0	7.5	7.5
Φd	0.6	0.6	0.6	0.8	0.8
a	1.5	1.5	2.0	2.0	2.0

■ Multiplier for Ripple Current

Freq. (Hz)	60	120	400	1K	10K	100K
10~16V	0.45	0.60	0.83	0.94	0.98	1.00
26~35V	0.38	0.50	0.75	0.90	0.97	1.00
50~100V	0.36	0.46	0.70	0.88	0.94	1.00

Jamicon Series：WG
Teapo Series：WG


■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
10V（13）	220	8x11	0.36	0.19
	330	8x15	0.50	0.152
	470	10x16	0.62	0.124
	680	10x18	0.78	0.098
	1000	10x20	1.00	0.080
	2200	12.5x25	1..61	0.046
	3300	12.5x30	2.00	0.038
	4700	12.5x40	2.50	0.032
16V（20）	100	8x11	0.27	0.348
	220	8x15	0.44	0.180
	330	10x16	0.57	0.144
	470	10x18	0.71	0.118
	680	10x20	0.90	0.093
	1000	12.5x20	1.16	0.076
	2200	12.5x30	1.89	0.043
	3300	12.5x40	2.44	0.036
	4700	16x40	2.64	0.031
25V（32）	100	8x11	0.34	0.330
	220	10x16	0.59	0.170
	330	10x18	0.76	0.136
	470	10x20	0.95	0.112
	680	12.5x20	1.21	0.088
	1000	12.5x25	1.62	0.072
	2200	12.5x40	2.70	0.041
	3300	16x40	3.04	0.034
35V（44）	68	8x11	0.30	0.374
	100	8x15	0.40	0.311

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
35V（44）	220	10x18	0.66	0.161
	330	10x25	0.93	0.129
	470	12.5x20	1.07	0.105
	680	12.5x25	1.42	0.083
	1000	12.5x30	1.87	0.068
	2200	16x40	2.83	0.039
50V（63）	47	8x11	0.29	0.453
	68	8x15	0.39	0.352
	100	10x16	0.49	0.292
	220	10x20	0.80	0.151
	330	12.5x20	1.04	0.121
	470	12.5x25	1.37	0.099
	680	12.5x30	1.79	0.078
	1000	12.5x40	2.48	0.064
63V（79）	47	8x15	0.35	0.424
	68	10x16	0.43	0.330
	100	10x18	0.55	0.274
	220	12.5x20	0.92	0.142
	330	12.5x25	1.24	0.113
	470	12.5x30	1.61	0.093
	680	16x36	2.09	0.073
100V（125）	47	12x25	0.44	0.368
	68	12.5x20	0.51	0.286
	100	12.5x25	0.68	0.238
	220	16x36	1.19	0.123
	330	18x40	1.64	0.098

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：TE
Teapo Series：SY Low impedance、Long life Series

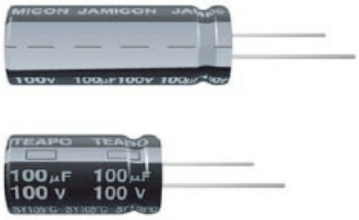


■ Features: Low Impedance , high permissible ripple current at high frequency and long life than SC
■ Recommended Applications :Used switching requlator applications in computers.
Especially for high frequency.
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃
Rated Voltage Range	6.3 ~ 100VDC
Rated Capacitance Range	10 ~ 15000 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.01CV or 3 μA whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 6.3 / 10 / 16 / 25 / 35 / 50 / 63 / 100 tan δ: 0.22 / 0.19 / 0.16 / 0.14 / 0.12 / 0.10 / 0.09 / 0.08 When nominal capacitance is over 1000 μF,tan δ shall be added 0.02 to the listed value with increase of every 1000 μF.
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120Hz): 6.3 / 10 / 16 / 25 / 35 / 50 / 63 / 100 Z-25℃ / Z+20℃: 4 / 3 / 2 / 2 / 2 / 2 / 2 / 2 Z-40℃ / Z+20℃: 8 / 6 / 4 / 3 / 3 / 3 / 3 / 3
Endurance	After applying rated voltage with rated ripple current for3000~ 6000 hours at 105℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 25% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: Not more than the specified value DΦ: 5~6.3Φ / 8~10Φx12.5 / 10x15~12Φ / 12.5~18Φ life(hours): 3000 hrs / 4000 hrs / 5000 hrs / 6000 hrs
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

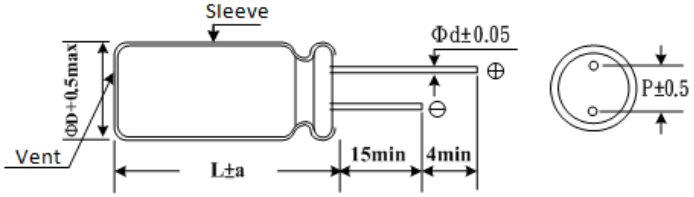

ΦD	5	6.3	8	10	13	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
a	1.5	1.5	1.5	1.5	2.0	2.0	2.0

■ Multiplier for Ripple Current

Freq. (Hz)	120	1 K	10 K	100 K
10~ 180 μF	0.40	0.75	0.90	1.00
220 ~ 560 μF	0.50	0.85	0.94	1.00
680 ~1800 μF	0.60	0.87	0.95	1.00
2200 ~ 3900 μF	0.75	0.90	0.95	1.00
≧ 4700 μF	0.85	0.95	0.98	1.00

Jamicon Series：TE

Teapo Series：SY

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
6.3V（8）	150	5x11	210	0.580
	330	6.3x11	340	0.220
	470	6.3x11	510	0.160
	680	8x11	640	0.130
	820	10x12.5	865	0.080
	1000	8x15	840	0.087
	1200	8x20	1050	0.069
		10x16	1210	0.060
	1500	8x20	1050	0.069
		10x20	1400	0.046
	1800	13x16	1450	0.049
	2200	10x25	1650	0.042
	2700	10x30	1910	0.031
		16x16	1940	0.042
	3300	10x25	1650	0.042
		13x20	1900	0.035
	3900	13x25	2230	0.027
		18x16	2210	0.043
	4700	13x30	2650	0.024
	5600	13x35	2880	0.020
		16x20	2530	0.027
	6800	13x40	3350	0.017
		16x25	2930	0.021
		18x20	2860	0.026
	8200	16x32	3450	0.017
	10000	16x36	3610	0.015
		18x25	3140	0.017
	12000	18x32	4170	0.015
	15000	18x36	4220	0.014
6.3V（9）	100	5x11	210	0.580
	220	6.3x11	340	0.220
	470	8x11	640	0.130
	680	8x15	840	0.087
	820	10x12.5	865	0.080
	1000	8x20	1050	0.069
		10x16	1210	0.060
	1200	10x20	1400	0.046
	1500	10x25	1650	0.042
		13x16	1450	0.049
	2200	10x30	1910	0.031
		13x20	1900	0.042
		16x16	1940	0.042
	2700	18x16	2210	0.043
	3300	10x30	1910	0.031
		13x25	2230	0.027
	3900	13x30	2650	0.024
		16x20	2530	0.027
	4700	13x35	2880	0.020
	5600	13x40	3350	0.017
		16x25	2930	0.021
		18x20	2860	0.026
	6800	16x32	3450	0.017
		18x25	3140	0.019
	8200	16x36	3610	0.015
		18x32	4170	0.015
	10000	16x40	4080	0.013
		18x36	4220	0.014
	12000	18x40	4280	0.012

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
16V（20）	100	5x11	210	0.580
		6.3x11	250	0.230
	120	6.3x11	340	0.220
	220	6.3x11	469	0.185
		8x11	582	0.150
	330	8x11	640	0.130
	470	8x20	950	0.078
		10x16	1210	0.060
	680	8x20	1050	0.069
		10x16	1210	0.060
	1000	8x20	1050	0.069
		10x20	1400	0.046
		13x16	1450	0.049
	1200	10x25	1650	0.042
	1500	10x30	1910	0.031
		13x20	1900	0.035
		16x16	1940	0.042
	2200	13x25	2230	0.027
		18x16	2210	0.043
	2700	13x30	2650	0.024
		16x20	2530	0.027
	3300	13x35	2880	0.020
	3900	13x40	3350	0.017
		16x25	2930	0.021
		18x20	2860	0.026
	4700	16x32	3450	0.017
		18x25	3140	0.019
	5600	16x36	3610	0.015
		18x32	4170	0.015
	6800	16x40	4080	0.013
	8200	18x36	4220	0.014
	10000	18x40	4280	0.012
25V（32）	47	5x11	210	0.580
	100	6.3x11	340	0.220
	150	8x11	640	0.160
	220	8x11	640	0.130
	330	8x15	840	0.087
		10x12.5	865	0.080
	470	8x20	1050	0.069
		10x16	1210	0.060
	680	10x20	1400	0.046
		13x16	1450	0.049
	820	10x25	1650	0.042
	1000	10x30	1910	0.031
		13x20	1900	0.035
		16x16	1940	0.042
	1200	18x16	2210	0.043
		13x25	2230	0.027
	1800	13x30	2650	0.024
		16x20	2530	0.027
	2200	13x35	2880	0.020
		18x20	2860	0.026
	2700	13x40	3350	0.017
		16x25	2930	0.021
	3300	16x32	3450	0.017
		18x25	3140	0.019
	3900	18x32	4170	0.015
	4700	18x36	4220	0.014
	5600	18x40	4280	0.012

Jamicon Series：TE


Teapo Series：SY

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
35V（44）	33	5x11	210	0.580
	47	6.3x11	275	0.390
	56	6.3x11	340	0.220
	68	6.3x11	500	0.170
	82	6.3x11	540	0.160
	100	8x11	580	0.150
	150	8x11	640	0.130
	220	10x12.5	865	0.080
	270	8x20	1050	0.069
	330	10x20	1400	0.046
	470	10x20	1400	0.046
		13x16	1450	0.049
	560	10x25	1650	0.042
	680	10x30	1910	0.031
		13x20	1900	0.035
		16x16	1940	0.042
	820	13x20	1900	0.035
	1000	13x25	2230	0.027
		18x16	2210	0.043
	1200	13x30	2650	0.024
		16x20	2530	0.027
	1500	13x35	2880	0.020
	1800	13x40	3350	0.017
		16x25	2930	0.021
		18x20	2860	0.026
	2200	16x32	3450	0.017
		18x25	3140	0.019
	2700	16x36	3610	0.015
		18x32	4170	0.015
	3300	16x40	4080	0.013
		18x36	4220	0.014
	3900	18x40	4280	0.012
50V（63）	10	5x11	135	1.200
	22	5x11	180	0.700
	33	6.3x11	245	0.490
	47	6.3x11	300	0.520
	56	6.3x11	320	0.300
	100	8x11	555	0.170
	120	8x15	730	0.120
	150	10x12.5	760	0.120
	180	8x20	910	0.091
	220	10x16	1050	0.084
	270	10x20	1220	0.060
		13x16	1260	0.061
		10x25	1440	0.055
	470	10x30	1690	0.043
		13x20	1660	0.045
		16x16	1690	0.055
	560	13x25	1950	0.034
		18x16	1930	0.054
	680	13x30	2310	0.030
	820	13x35	2510	0.025
		16x20	2210	0.034
	1000	13x40	2920	0.021
		16x25	2555	0.025
		18x20	2490	0.036
	1200	16x32	3010	0.022
	1200	18x25	2740	0.026

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
50V（63）	1500	16x36	3150	0.019
	1800	16x40	3710	0.016
		18x32	3635	0.021
	2200	18x36	3680	0.017
	2700	18x40	3800	0.014
63V（79）	15	5x11	55	2.3
	33	6.3x11	115	1.2
	56	8x12	232	0.63
	82	8x15	300	0.45
		10x12.5	288	0.43
	120	8x20	362	0.33
		10x16	357	0.31
	180	10x20	466	0.21
		13x16	466	0.23
	220	10x25	531	0.2
	270	10x30	663	0.15
		13x20	690	0.16
		16x16	795	0.14
	330	13x25	784	0.12
	390	18x16	920	0.12
	470	13x30	905	0.1
		16x20	1040	0.091
	560	13x35	1050	0.083
		16x25	1250	0.073
	680	13x40	1180	0.071
		18x20	1240	0.08
	820	16x32	1570	0.054
		18x25	1490	0.057
	1000	16x36	1790	0.045
		18x32	1630	0.047
	1200	16x40	2020	0.04
100V（125）	22	6.3x11	200	0.85
	27	8x12	232	0.63
	39	8x15	300	0.45
	47	10x12.5	288	0.43
	56	8x20	362	0.33
	68	10x16	357	0.31
	82	10x20	466	0.21
		13x16	466	0.23
	100	10x25	531	0.2
	120	10x30	663	0.15
		13x20	690	0.16
	150	16x16	795	0.14
	180	13x25	784	0.12
		18x16	920	0.12
	220	13x30	905	0.1
		16x20	1040	0.091
	270	13x35	1050	0.083
		16x25	1250	0.073
	330	13x40	1180	0.071
		18x20	1240	0.08
	390	16x32	1570	0.054
		18x25	1490	0.057
	470	16x36	1790	0.045
		18x32	1630	0.047
	560	16x40	2020	0.04
	680	18x36	2020	0.04
	820	18x40	2330	0.036

Jamicon Series：TT
Teapo Series：TA Low impedance、Long life Series

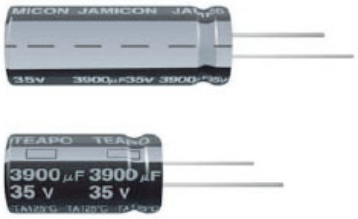


■ Endurance:105℃ 4000~10000hours
■ Recommended Applications： Applicable for SMPS, Adaptor,Charger,Monitor/Computer
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃
Rated Voltage Range	6.3~100VDC
Rated Capacitance Range	22 ~ 8200 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.01CV or 3 μA whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 6.3 / 10 / 16 / 25 / 35 / 50 / 63 / 100 tan δ: 0.22 / 0.19 / 0.16 / 0.14 / 0.12 / 0.10 / 0.09 / 0.08 When nominal capacitance is over 1000 μF,tan δ shall be added 0.02 to the listed value with increase of every 1000 μF.
Low Temperature Stability Impedance Ratio (MAX)	WV: 6.3 / 10 / 16 / 25 / 35 / 50 / 63 / 100 Z(-25℃)/Z(+20℃): 4 / 3 / 2 / 2 / 2 / 2 / 2 / 2 Z(-40℃)/Z(+20℃): 8 / 6 / 4 / 3 / 3 / 3 / 3 / 3
Endurance	After applying rated voltage with rated ripple current for 4000~10000hours at 105℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 25% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: ΦD: 5~6.3Φ / 8~10Φ / 12.5~18Φ 6.3~10(V): 4000hrs / 6000hrs / 8000hrs 16~100(V): 5000hrs / 7000hrs / 10000hrs
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

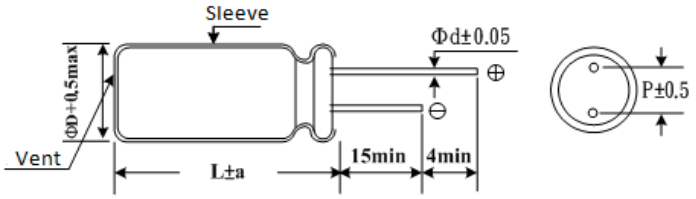

ΦD	5	6.3	8	10	13	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
a	1.5	1.5	1.5	1.5	2.0	2.0	2.0

■ Multiplier for Ripple Current

Freq. (Hz)	120	1K	10K	100K
22 ~ 180	0.40	0.75	0.90	1.00
220 ~ 560	0.50	0.85	0.94	1.00
680 ~1800	0.60	0.87	0.95	1.00
2200 ~ 3900	0.75	0.90	0.95	1.00
4700 μF Higher	0.85	0.95	0.98	1.00

Jamicon Series：TT

Teapo Series：TA

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
6.3V（8）	150	5x11	210	0.580
	330	6.3x11	340	0.220
	680	8x11	640	0.130
	820	10x12.5	865	0.080
	1000	8x15	840	0.087
	1200	8x20	1050	0.069
		10x15	1210	0.060
	1500	10x20	1400	0.046
	1800	13x16	1450	0.049
	2200	10x25	1650	0.042
	2700	10x30	1910	0.031
	3300	13x20	1900	0.035
	3900	13x25	2230	0.027
	4700	13x30	2650	0.024
	5600	13x35	2880	0.020
		16x20	2530	0.027
	6800	13x40	3350	0.017
		16x25	2930	0.021
		18x20	2860	0.026
	8200	16x32	3450	0.017
10V（13）	100	5x11	210	0.580
	220	6.3x11	340	0.220
	470	6.3x12	450	0.220
		8x11	640	0.130
	680	8x15	840	0.087
		10x12.5	865	0.080
	1000	8x16	840	0.087
		10x12.5	865	0.080
		8x20	1050	0.069
		10x15	1210	0.060
	1200	10x20	1400	0.046
	1500	10x25	1650	0.042
		13x16	1450	0.049
	2200	10x30	1910	0.031
		13x20	1900	0.035
	3300	13x25	2230	0.027
	3900	13x30	2650	0.024
		16x20	2530	0.027
	4700	13x35	2880	0.020
	5600	13x40	3350	0.017
		16x25	2930	0.021
		18x20	2860	0.026
	6800	16x32	3450	0.017
		18x25	3140	0.019
	8200	16x36	3610	0.015
		18x32	4170	0.015
16V（20）	56	5x11	210	0.580
	100	5x11	210	0.580
	120	6.3x11	340	0.220
	220	6.3x11	340	0.220
	330	8x11	640	0.130
	470	8x15	840	0.087
		10x12.5	865	0.080
	680	8x20	1050	0.069
		10x15	1210	0.060
	1000	10x20	1400	0.046
		13x16	1450	0.049
	1200	10x25	1650	0.042
	1500	10x30	1910	0.031
		13x20	1900	0.035
	2200	13x20	1900	0.035
		13x25	2230	0.027
	2700	13x30	2650	0.024

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
16V（20）	2700	16x20	2530	0.027
	3300	13x35	2880	0.020
	3900	13x40	3350	0.017
		16x25	2930	0.021
		18x20	2860	0.026
	4700	16x32	3450	0.017
		18x25	3140	0.019
	5600	16x36	3610	0.015
		18x32	4170	0.015
	6800	16x40	4080	0.013
	8200	18x36	4220	0.014
25V（32）	47	5x11	210	0.580
	100	6.3x11	340	0.220
	220	6.3x12	400	0.220
		8x11	640	0.130
	330	8x15	840	0.087
		10x12.5	865	0.080
	470	8x20	1050	0.069
		10x12.5	865	0.080
		10x15	1210	0.060
	680	10x20	1400	0.046
		13x16	1450	0.049
	820	10x25	1650	0.042
	1000	10x20	1400	0.046
		10x30	1910	0.031
		13x20	1900	0.035
	1500	13x25	2230	0.027
	1800	13x30	2650	0.024
		16x20	2530	0.027
	2200	13x25	2230	0.027
		13x35	2880	0.020
		18x20	2860	0.026
	2700	13x40	3350	0.017
		16x25	2930	0.021
	3300	16x32	3450	0.017
		18x25	3140	0.019
	3900	16x36	3610	0.015
		18x32	4170	0.015
	4700	16x40	4080	0.013
		18x36	4220	0.014
	5600	18x40	4280	0.012
35V（44）	33	5x11	210	0.580
	56	6.3x11	340	0.220
	100	6.3x11	340	0.220
		8x11	580	0.150
	150	8x11	640	0.130
	220	8x12	640	0.130
		8x15	840	0.087
		10x12.5	865	0.080
	270	8x20	1050	0.069
	330	10x15	1210	0.060
	470	10x16	1210	0.060
		10x20	1400	0.046
		13x16	1450	0.049
	560	10x25	1650	0.042
	680	10x30	1910	0.031
		13x20	1900	0.035
	1000	13x20	1900	0.035
		13x25	2230	0.027
	1200	13x30	2650	0.024
		16x20	2530	0.027
	1500	13x35	2880	0.020
	1800	13x40	3350	0.017

Jamicon Series：TT

Teapo Series：TA

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
35V (44)	1800	16x25	2930	0.021
		18x20	2860	0.026
	2200	16x25	2930	0.021
		16x32	3450	0.017
		18x25	3140	0.019
	2700	16x36	3610	0.015
		18x32	4170	0.015
	3300	16x40	4080	0.013
		18x36	4220	0.014
	3900	18x40	4280	0.012
50V (63)	10	5x11	100	1.200
	22	5x11	180	0.700
	33	6.3x11	245	0.490
	47	6.3x11	300	0.520
	56	6.3x11	320	0.300
	100	8x11	555	0.170
	120	8x15	730	0.120
	150	10x12.5	760	0.120
	180	8x20	910	0.091
	220	8x20	910	0.091
		10x16	1050	0.084
	270	10x20	1220	0.060
		13x16	1260	0.061
	330	10x20	1400	0.058
		10x25	1440	0.055
	470	10x30	1690	0.043
		13x20	1660	0.045
		16x16	1690	0.055
	560	13x25	1950	0.034
		18x16	1930	0.054
	680	13x30	2310	0.030
	820	13x35	2510	0.025
		16x20	2210	0.034
	1000	13x40	2920	0.021
		16x25	2555	0.025
		18x20	2490	0.036
	1200	16x32	3010	0.022
		18x25	2740	0.026
	1500	16x36	3150	0.019
	1800	16x40	3710	0.016
		18x32	3635	0.021
	2200	18x36	3680	0.017
	2700	18x40	3800	0.014
63V (79)	15	5x11	55	2.300
	33	6.3x11	115	1.200
	56	8x12	232	0.630
	82	8x15	300	0.450
		10x12.5	288	0.430
	120	8x20	362	0.330
		10x16	357	0.310
	180	10x20	466	0.210
		13x16	466	0.230
	220	10x25	531	0.200
	270	10x30	663	0.150
		13x20	690	0.160
		16x16	795	0.140
	330	13x25	784	0.120
		18x16	920	0.120
	470	13x30	905	0.100

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
63V (79)	470	16x20	1040	0.091
	560	13x35	1050	0.083
		16x25	1250	0.073
	680	13x40	1180	0.071
		18x20	1240	0.080
	820	16x32	1570	0.054
		18x25	1490	0.057
	1000	16x36	1790	0.045
		18x32	1630	0.047
	1200	16x40	2020	0.040
80(100)	68	10x12.5	288	0.430
	100	10x16	357	0.310
	120	10x20	466	0.210
	150	10x25	490	0.200
		13x16	466	0.230
	180	10x25	510	0.190
	220	13x20	690	0.160
	330	13x25	784	0.120
		16x20	800	0.140
	390	13x30	905	0.100
	470	13x25	1050	0.083
		16x25	1250	0.083
		18x20	1240	0.080
	560	13x40	1180	0.071
	680	16x32	1570	0.054
		18x25	1490	0.057
	820	16x36	1790	0.045
		18x32	1790	0.045
	1000	16x40	2020	0.040
		18x36	2020	0.040
	1200	18x40	2330	0.036
100V (125)	15	6.3x11	115	1.200
	27	8x12	232	0.630
	39	8x15	300	0.450
	47	10x12.5	288	0.430
	56	8x20	362	0.330
	68	10x16	357	0.310
	82	10x20	466	0.210
		13x16	466	0.230
	100	10x25	531	0.200
	120	10x30	663	0.150
		13x20	690	0.160
	150	16x16	795	0.140
	180	13x25	784	0.120
		18x16	920	0.120
	220	13x30	905	0.100
		16x20	1040	0.091
	270	13x35	1050	0.083
		16x25	1250	0.073
	330	13x40	1180	0.071
		18x20	1240	0.080
	390	16x32	1570	0.054
		18x25	1490	0.057
	470	16x36	1790	0.045
		18x32	1630	0.047
	560	16x40	2020	0.040
	680	18x36	2020	0.040
	820	18x40	2330	0.036

Jamicon Series：TV
Teapo Series：ST Low impedance、Long life Series(No water)






■ Recommended Applications : Applicable for SMPS, Adaptor,Charger,Monitor/Computer
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-55 ~ +105℃
Rated Voltage Range	6.3~100VDC
Rated Capacitance Range	10 ~ 15000 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.01CV or 3 μA whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 6.3 / 10 / 16 / 25 / 35 / 50 / 63 / 100 tan δ: 0.22 / 0.19 / 0.16 / 0.14 / 0.12 / 0.14 / 0.14 / 0.14 When nominal capacitance is over 1000 μF,tan δ shall be added 0.02 to the listed value with increase of every 1000 μF. Down size tan δ add 3%.
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120Hz): 6.3 / 10 / 16 / 25 / 35 / 50 / 63 / 100 Z-25℃ / Z+20℃: 4 / 3 / 2 / 2 / 2 / 2 / 2 / 2 Z-55℃ / Z+20℃: 8 / 6 / 4 / 3 / 3 / 3 / 3 / 3
Endurance	After applying rated voltage with rated ripple current for 4000~10000hours at 105℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 25% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: ΦD: 5~6.3Φ / 8~10Φ / 12.5~18Φ 6.3~10(V): 4000hrs / 6000hrs / 8000hrs 16~100(V): 5000hrs / 7000hrs / 10000hrs
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

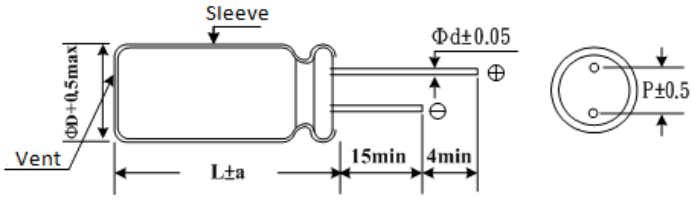

ΦD	5	6.3	8	10	13	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
a	1.5	1.5	1.5	1.5	2.0	2.0	2.0

■ Multiplier for Ripple Current

Freq. (Hz)	120	1K	10K	100K
10~180	0.4	0.75	0.90	1.00
220~560	0.5	0.85	0.94	1.00
680~1800	0.6	0.87	0.95	1.00
2200~3900	0.75	0.90	0.95	1.00
4700 μF Higher	0.85	0.95	0.98	1.00

Jamicon Series：TV

Teapo Series：ST

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,25℃) (100KHz)
6.3(8)	150	5x11	210	0.720
	330	6.3x11	340	0.380
	680	8x11	640	0.200
	820	8x15	840	0.160
	1000	10x12	865	0.120
	1500	8x20	1050	0.110
		10x15	1210	0.084
	2200	10x20	1400	0.062
	2700	10x25	1650	0.052
	3300	13x20	1900	0.046
	3900	13x25	2230	0.034
	4700	13x30	2650	0.030
	5600	13x35	2880	0.027
	6800	13x40	3350	0.024
		16x25	2930	0.028
	8200	16x32	3450	0.025
	10000	16x36	3610	0.018
	12000	18x32	4170	0.015
	15000	18x36	4220	0.014
10(13)	100	5x11	210	0.72
	220	6.3x11	340	0.38
	470	8x11	640	0.200
	680	8x15	840	0.160
	1000	10x15	1210	0.084
	1500	10x20	1400	0.062
	2200	10x25	1650	0.052
	2700	13x20	1900	0.046
	3300	13x25	2230	0.034
	3900	13x30	2650	0.030
	4700	13x35	2880	0.027
	5600	13x40	3350	0.024
		16x25	2930	0.028
	6800	16x32	3450	0.025
	8200	16x36	3610	0.018
	10000	18x36	4220	0.014
16 (20)	56	5x11	210	0.720
	100	6.3x11	340	0.380
	220	8x11	640	0.200
	330	8x15	701	0.160
	470	8x15	840	0.160
	680	10x15	1210	0.084
	1000	10x20	1400	0.062
	1500	10x25	1650	0.052
	2200	13x25	2230	0.034
	2700	13x30	2650	0.030
	3300	13x35	2880	0.027
	3900	13x40	3350	0.024
	4700	16x32	3450	0.028
	5600	16x36	3610	0.018
		18x32	4170	0.015
	6800	18x36	4220	0.014
25 (32)	47	5x11	210	0.720
	100	6.3x11	340	0.380
	150	8x11	640	0.200
	220	8x11	640	0.200
	330	8x15	840	0.160
	470	10x15	1210	0.084
	680	10x20	1400	0.062
	820	10x25	1650	0.052
	1000	13x20	1900	0.046
	1500	13x25	2230	0.034
	2200	13x35	2880	0.027

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,25℃) (100KHz)
25 (32)	2700	16x25	2930	0.028
	3300	16x32	3450	0.025
	3900	18x32	4170	0.015
	4700	18x36	4280	0.014
35 (44)	33	5x11	210	0.720
	47	6.3x11	340	0.380
	150	8x11	640	0.200
	220	8x15	840	0.160
	330	10x20	1400	0.062
	470	10x25	1650	0.052
	680	10x30	1910	0.044
		13x20	1900	0.046
	820	13x25	2230	0.045
	1000	13x25	2230	0.045
	1200	13x30	2650	0.030
	1500	13x35	2880	0.027
	1800	13x40	3350	0.024
	2200	16x32	3450	0.025
	2700	16x36	3610	0.022
	3300	18x36	4220	0.020
50 (63)	10	5x11	120	3.50
	22	5x11	210	2.300
	33	6.3x11	340	1.200
	47	6.3x11	340	1.200
	100	8x11	555	0.630
	120	8x15	730	0.450
	150	8x20	910	0.330
	220	10x16	1050	0.310
	330	10x20	1400	0.210
	470	10x30	1690	0.150
		13x20	1660	0.160
	560	13x25	1950	0.120
	680	13x30	2310	0.100
	820	13x35	2510	0.083
	1000	16x25	2555	0.073
	1200	16x32	3010	0.054
	1500	16x36	3150	0.045
	1800	18x32	3635	0.047
	2200	18x36	3680	0.040
	2700	18x40	3800	0.036
63 (79)	10	5x11	55	2.300
	33	6.3x11	115	1.200
	56	8x11	232	0.630
	120	10x16	357	0.310
	180	10x20	466	0.210
	220	10x25	531	0.200
	270	10x30	663	0.150
		13x20	690	0.160
	330	13x25	784	0.120
	470	13x30	905	0.100
	560	13x35	1050	0.083
	680	13x40	1180	0.071
	820	16x32	1570	0.054
	1000	16x36	1790	0.045
	1200	16x40	2020	0.040
100 (125)	10	6.3x11	55	5.000
	15	6.3x11	70	5.000
	22	8x11	85	2.700
	33	8x11	95	2.500
	47	8x15	150	1.800
	56	8x20	200	1.500
	68	10x15	230	1.300

Jamicon Series：TV

Teapo Series：ST

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,25℃) (100KHz)
100 (125)	82	10x20	250	1.200
	100	10x20	330	0.950
	120	10x25	400	0.800
	150	13x20	460	0.900
	220	13x25	640	0.600
	330	16x25	720	0.570

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,25℃) (100KHz)
100 (125)	470	16x32	770	0.550
		18x25	840	0.500
	680	18x36	1400	0.180
	820	18x40	1850	0.130
	1000	18x40	1850	0.130

Jamicon Series：SA
Teapo Series：TT

Low impedance、Long life、Miniaturization Series(No water)






■ Endurance: 105℃ 5000hrs
■ Recommended Applications : Apply to the requirement of long life, low impedance, high reliability, etc.
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃
Rated Voltage Range	6.3 ~ 50VDC
Rated Capacitance Range	1~270 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.01CV or 3 μA whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 6.3 / 10 / 16 / 25 / 35 / 50 tan δ: 0.5 / 0.4 / 0.35 / 0.3 / 0.25 / 0.25
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120Hz): 6.3 / 10 / 16 / 25 / 35 / 50 Z-25℃ / Z+20℃: 4 / 3 / 2 / 2 / 2 / 2 Z-40℃ / Z+20℃: 8 / 6 / 4 / 3 / 3 / 3
Endurance	After applying rated voltage with rated ripple current for 5000hours at 105℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 30% of initial value D.F. (tan δ): Not more than300% of specified value Leakage current:
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4. Capacitance change: Within ± 25% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: Not more than the specified value

■ Dimensions [mm]

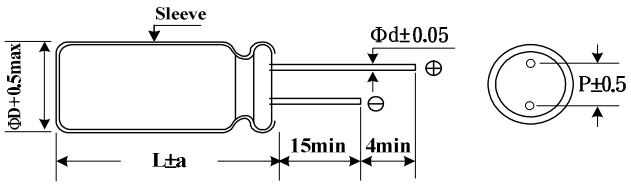

Vent only for 8Φ

ΦD	4	5	6.3	8
P	1.5	2.0	2.5	3.5
Φd	0.45	0.45	0.45	(0.45)0.5
a	1.0	1.0	1.0	1.0

( ) : L = 5

■ Multiplier for Ripple Current

Freq. (Hz)	120	1 K	10 K	100 K
1~3.3 μF	0.20	0.66	0.90	1.00
4.7~6.8 μF	0.35	0.70	0.90	1.00
10~150 μF	0.40	0.75	0.90	1.00
220~270 μF	0.50	0.85	0.94	1.00

Jamicon Series：SA

Teapo Series：TT

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
6.3V (8)	33	4x5	37	5.4
	47	4x7	44	4.5
	56	5x5	57	3.1
	82	5x7	70	2.5
	100	6.3x5	82	1.7
	150	6.3x7	116	1.3
	220	8x5	110	1.5
	270	8x7	162	0.9
10V (13)	22	4x5	37	5.4
	33	4x7	44	4.5
		5x5	57	3.1
	47	5x7	70	2.5
	68	6.3x5	82	1.7
	100	6.3x7	116	1.3
	150	8x5	110	1.5
	220	8x7	162	0.9
16V (20)	15	4x5	37	5.4
	22	4x7	44	4.5
		5x5	57	3.1
	33	5x7	70	2.5
	47	6.3x5	82	1.7
	68	6.3x7	116	1.3
	100	8x5	110	1.5
	150	8x7	162	0.9
25V (32)	10	4x5	37	5.4

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
25V (32)	15	4x7	44	4.5
		5x5	57	3.1
	22	5x7	70	2.5
	33	6.3x5	82	1.7
	56	6.3x7	116	1.3
	68	8x5	110	1.5
	100	8x7	162	0.9
35V (44)	4.7	4x5	37	5.4
	6.8	4x7	44	4.5
	10	5x5	57	3.1
		5x7	70	2.5
	22	6.3x5	82	1.7
		6.3x7	116	1.3
	33	8x5	110	1.5
	47	8x7	162	0.9
50V (63)	1.0	4x5	18	19
	2.2	4x5	22	14
	3.3	4x5	26	11
	4.7	4x7	30	9
		5x5	40	6
	6.8	5x7	50	4.8
	10	6.3x5	63	2.9
	15	6.3x7	90	2.2
	22	8x5	84	2.6
		8x7	120	1.6

Jamicon Series：TQ
Teapo Series：TB Low impedance、High Ripple Series






■ Endurance:105℃ 5000~6000hours
■ Recommended Applications :AV(TV, Video, Audio), Monitor/Computer, OA/HA/Communication,Converter/Inverter,Adapter, SMPS
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃
Rated Voltage Range	6.3~35VDC
Rated Capacitance Range	47~ 8200 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.01CV or3 μA whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 6.3 / 10 / 16 / 25 / 35 tan δ: 0.22 / 0.19 / 0.16 / 0.14 / 0.12 When nominal capacitance is over 1000 μF,tan δ shall be added 0.02 to the listed value with increase of every 1000 μF.
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120Hz): 6.3 / 10 / 16 / 25 / 35 Z-25℃ / Z+20℃: 4 / 3 / 2 / 2 / 2 Z-40℃ / Z+20℃: 8 / 6 / 4 / 3 / 3
Endurance	After applying rated voltage with rated ripple current for 5000~6000hours at 105℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 25% of initial value(6.3、10V：± 30%) D.F. (tan δ): Not more than 200% of specified value Leakage current: DΦ: 5~6.3Φ / 8~16Φ life(hours): 5000hrs / 6000hrs
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

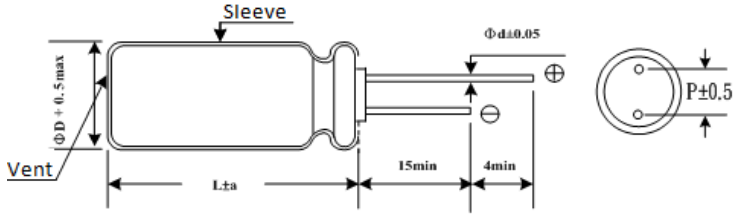

ΦD	5	6.3	8	10	13	16
P	2.0	2.5	3.5	5.0	5.0	7.5
Φd	0.5	0.5	0.6	0.6	0.6	0.8
a	1.5	1.5	1.5	1.5	2.0	2.0

■ Multiplier for Ripple Current

Freq. (Hz)	120	1K	10K	100K
47~150 μF	0.40	0.75	0.90	1.00
220 ~ 560 μF	0.50	0.85	0.94	1.00
680 ~ 1800 μF	0.60	0.87	0.95	1.00
2200 ~ 3900 μF	0.75	0.90	0.95	1.00
4700 ~8200 μF	0.85	0.95	0.98	1.00

Jamicon Series：TQ
Teapo Series：TB

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
6.3V（8）	220	5x11	330	0.24
	470	6.3x11	500	0.11
	820	8x12	900	0.062
	1200	8x15	1210	0.048
		10x12.5	1240	0.053
	1500	8x20	1410	0.041
	1800	10x16	1650	0.038
	2200	10x20	1960	0.026
	2700	10x25	2250	0.020
	3900	13x20	2480	0.023
	4700	13x25	2900	0.020
	5600	13x30	3450	0.017
	6800	13x35	3570	0.016
		16x20	3250	0.018
	8200	16x25	3630	0.017
10V（13）	150	5x11	330	0.24
	330	6.3x11	500	0.11
	680	8x12	900	0.062
	1000	8x15	1210	0.048
		10x12.5	1240	0.053
	1500	8x20	1410	0.041
		10x16	1650	0.038
	1800	10x20	1960	0.026
	2200	10x25	2250	0.023
	3300	13x20	2480	0.023
	3900	13x25	2900	0.020
	4700	13x30	3450	0.017
		16x20	3250	0.018
	5600	13x35	3570	0.016
	6800	16x25	3630	0.017
16V（20）	100	5x11	330	0.24
	220	6.3x11	500	0.11
	470	8x12	900	0.062
	680	8x15	1210	0.048
		10x12.5	1240	0.053
	1000	8x20	1410	0.041
		10x16	1650	0.038
	1500	10x20	1960	0.026

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
16V（20）	1800	10x25	2250	0.025
	2200	13x20	2480	0.025
	2700	13x25	2900	0.022
	3300	13x30	3450	0.018
		16x20	3250	0.020
	3900	13x35	3570	0.017
	4700	16x25	3630	0.018
25V（32）	68	5x11	330	0.242
	150	6.3x11	500	0.11
	330	8x12	900	0.062
	390	8x15	1210	0.048
	470	10x12.5	1240	0.053
	560	8x20	1410	0.041
	680	10x16	1650	0.038
	820	10x20	1960	0.026
	1000	10x25	2250	0.023
	1500	13x20	2480	0.023
	1800	13x25	2900	0.020
	2200	13x30	3450	0.017
		16x20	3250	0.019
	2700	13x35	3570	0.016
	3300	16x25	3630	0.017
35V（44）	47	5x11	330	0.24
	100	6.3x11	500	0.11
	220	8x12	900	0.062
	270	8x15	1210	0.050
	330	10x12.5	1240	0.053
	390	8x20	1410	0.041
	470	10x16	1650	0.038
	560	10x20	1960	0.026
	680	10x25	2250	0.023
	1000	13x20	2480	0.023
	1200	13x25	2900	0.022
	1500	13x30	3450	0.018
		16x20	3250	0.020
	1800	13x35	3570	0.018
	2200	16x25	3630	0.017

Jamicon Series：TU
Teapo Series：TC

Low impedance、Long life Series






■ Endurance:105℃6000~10000hours
■ Recommended Applications :Applicable forAV(TV,Viodeo,Audio),
OA/HA/Communication, SMPS, Adapter,Monitor/Computer,Converter/Inverter
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃
Rated Voltage Range	6.3~100VDC
Rated Capacitance Range	8.2 ~ 8200μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.01CV or 3μA whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 6.3 / 10 / 16 / 25 / 35 / 50 / 63 / 80 / 100 tan δ: 0.22 / 0.19 / 0.16 / 0.14 / 0.12 / 0.10 / 0.09 / 0.08 / 0.08 When nominal capacitance is over 1000μF,tan δ shall be added 0.02 to the listed value with increase of every 1000μF.
Low Temperature Stability Impedance Ratio (MAX)	WV: 6.3 / 10 / 16 / 25 / 35 / 50 / 63 / 80 / 100 Z(120Hz) Z-25℃ / Z+20℃: 4 / 3 / 2 / 2 / 2 / 2 / 2 / 2 / 2 Z-40℃ / Z+20℃: 8 / 6 / 4 / 3 / 3 / 3 / 3 / 3 / 3
Endurance	After applying rated voltage with rated ripple current for 6000~10000hours at 105℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 25% of initial value(6.3、10V：± 30%) D.F. (tan δ): Not more than 200% of specified value Leakage current: DΦ: 5-6.3Φ / 8Φ / 10~18Φ Life: 6000hrs / 8000hrs / 10000hrs
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

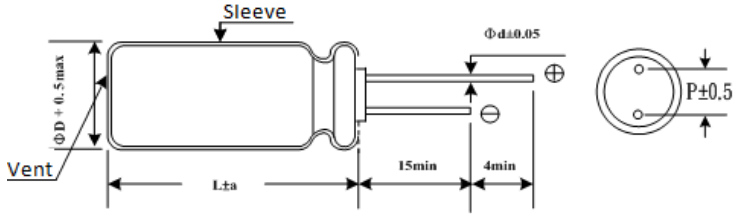

ΦD	5	6.3	8	10	13	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
a	1.5	1.5	1.5	1.5	2.0	2.0	2.0

■ Multiplier for Ripple Current

Freq. (Hz)	120	1K	10K	100K
8.2 ~ 33	0.42	0.70	0.90	1.00
47 ~ 270	0.50	0.73	0.92	1.00
330 ~680	0.55	0.77	0.94	1.00
820 ~ 1800	0.60	0.80	0.96	1.00
2200 ~8200	0.70	0.85	0.98	1.00

Jamicon Series：TU

Teapo Series：TC

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
6.3V (8)	220	5x11	345	0.242
	470	6.3x11	540	0.103
	820	8x12	945	0.062
	1200	8x16	1250	0.050
		10X12.5	1330	0.043
	1500	8x20	1500	0.032
	1800	10x16	1760	0.031
	2200	10x20	1960	0.022
	2700	10x25	2250	0.020
	3900	13x20	2480	0.019
	4700	13x25	2900	0.017
	5600	13x30	3450	0.014
	6800	16x20	3250	0.017
		13x35	3570	0.013
	8200	16x25	3630	0.014
10V (13)	150	5x11	345	0.242
	330	6.3x11	540	0.103
	680	8x12	945	0.062
	1000	8x16	1250	0.050
		10x12.5	1330	0.043
	1500	8x20	1500	0.032
		10x16	1760	0.031
	1800	10x20	1960	0.022
	2200	10x25	2250	0.020
	3300	13x20	2480	0.019
	3900	13x25	2900	0.017
	4700	13x30	3450	0.014
		16x20	3250	0.017
	5600	13x35	3570	0.013
	6800	16x25	3630	0.014
16V (20)	100	5x11	345	0.242
	220	6.3x11	540	0.103
	470	8x12	945	0.062
	680	8x16	1250	0.050
		10x12.5	1330	0.043
	1000	8x20	1500	0.032
		10x16	1760	0.031
	1500	10x20	1960	0.025
	1800	10x25	2250	0.025
	2200	13x20	2480	0.025
	2700	13x25	2900	0.022
	3300	13x30	3450	0.018
		16x20	3250	0.020
	3900	13x35	3570	0.017
	4700	16x25	3630	0.018
25V (32)	68	5x11	345	0.242
	150	6.3x11	540	0.103
	330	8x12	945	0.062
	390	8x16	1250	0.050
	470	10x12.5	1330	0.043
	560	8x20	1500	0.032
	680	10x16	1760	0.031
	820	10x20	1960	0.025
	1000	10x25	2250	0.022
	1500	13x20	2480	0.021
	1800	13x25	2900	0.020
	2200	13x30	3450	0.016
		16x20	3250	0.019
	2700	13x35	3570	0.015
	3300	16x25	3630	0.016
35V (44)	47	5x11	345	0.220
	100	6.3x11	540	0.094

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
35V (44)	220	8x12	945	0.060
	270	8x16	1250	0.050
	330	10x12.5	1330	0.041
	390	8x20	1500	0.032
	470	10x16	1760	0.030
	560	10x20	1960	0.025
	680	10x25	2250	0.023
	1000	13x20	2480	0.025
	1200	13x25	2900	0.022
	1500	13x30	3450	0.018
		16x20	3250	0.020
	1800	13x35	3570	0.018
	2200	16x25	3630	0.015
50V (63)	27	5x11	238	0.340
	56	6.3x11	385	0.140
	100	8x12	724	0.074
	120	8x16	950	0.061
	150	10x12.5	979	0.061
	180	8x20	1190	0.046
	220	10x16	1370	0.042
	270	10x20	1580	0.030
	330	10x25	1870	0.028
	470	13x20	2050	0.027
	560	13x25	2410	0.023
	680	13x30	2860	0.021
	820	13x35	2960	0.019
		16x20	2730	0.023
	1000	16x25	3010	0.021
63V (79)	18	5x11	173	1.000
	47	6.3x11	278	0.560
	82	8x12	525	0.264
	100	8x16	688	0.192
	120	10x12.5	725	0.180
	150	8x20	861	0.144
	180	10x16	998	0.132
	270	10x20	1200	0.094
		13x16	1200	0.098
	330	10x25	1410	0.083
	390	13x20	1570	0.072
	470	13x25	1990	0.052
	560	13x30	2410	0.042
		16x20	2100	0.052
	680	13x35	2620	0.040
	820	13x40	2940	0.032
		16x25	2730	0.038
		18x20	2500	0.046
	1200	16x32	2990	0.029
		18x25	2800	0.037
	1500	16x36	3040	0.025
		18x32	3300	0.030
	1800	16x40	3570	0.023
		18x36	3570	0.024
	2200	18x40	3670	0.022
80V (100)	12	5x11	163	1.400
	33	6.3x11	267	0.570
	56	8x12	462	0.360
	68	8x16	585	0.250
	82	10x12.5	624	0.230
	100	8x20	735	0.190
	120	10x16	780	0.170
	180	10x20	1040	0.120
		13x16	975	0.130

Jamicon Series：TU


Teapo Series：TC

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
80V (100)	220	10x25	1170	0.110
	270	13x20	1430	0.085
	330	13x25	1620	0.060
	390	13x30	1950	0.051
		16x20	1750	0.058
	470	13x35	2140	0.043
	560	13x40	2340	0.036
		16x25	2210	0.044
		18x20	1950	0.054
	680	16x32	2400	0.033
	820	16x36	2600	0.029
		18x25	2270	0.038
	1000	16x40	2860	0.027
		18x32	2470	0.031
	1200	18x36	2860	0.027
	1500	18x40	3510	0.026
100V (125)	8.2	5x11	163	1.400
	18	6.3x11	267	0.570
	33	8x12	462	0.360
	47	8x16	585	0.250
	56	10x12.5	624	0.230

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
100V (125)	68	8x20	735	0.190
	82	10x16	780	0.170
	100	10x20	1040	0.120
		13x16	975	0.130
	120	10x25	1170	0.110
	150	13x20	1430	0.085
	220	13x25	1620	0.060
	270	13x30	1950	0.051
		16x20	1750	0.058
	330	13x35	2140	0.043
	390	13x40	2340	0.036
		16x25	2210	0.044
		18x20	1950	0.054
	470	16x32	2400	0.033
		18x25	2270	0.038
	560	16x36	2600	0.029
		18x32	2470	0.031
	680	16x40	2860	0.027
		18x36	2860	0.027
	820	18x40	3510	0.026

Jamicon Series：TC
Teapo Series：SQ High Ripple Series

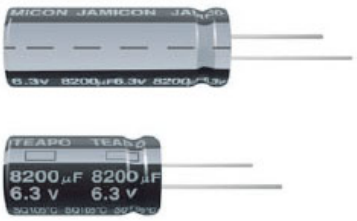


■ Endurance: 105℃ 2000 hours
■ Recommended Applications : AV(TV, Video, Audio); Monitor/Computer; OA/HA/ Communication; Converter/Inverter; Energy saving lamp; PFC circuit;SMPS; Ballast; Adapter
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40~+105℃
Rated Voltage Range	160 ~ 500VDC
Rated Capacitance Range	2.2 ~ 220 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.03CV +10 μA (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 160 / 200 / 250 / 350 / 400 / 420~450 tan δ: 0.15 / 0.15 / 0.15 / 0.24 / 0.24 / 0.24
Low Temperature Stability Impedance Ratio (MAX)	Z (120Hz) \ WV: 160 / 200 / 250 / 350 / 400 / 420~450 Z(-25℃) / Z(20℃): 3 / 3 / 3 / 5 / 5 / 6 Z(-40℃) / Z(20℃): 4 / 4 / 4 / 6 / 6 / 8
Endurance	After applying rated voltage with rated ripple current for2000 hours at 105℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

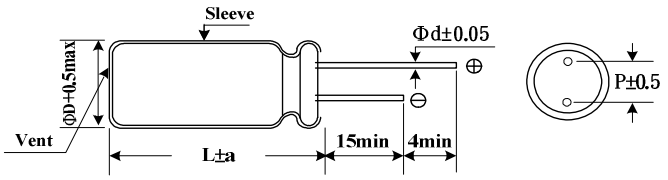

ΦD	8	10	12.5	13	16	18
P	3.5	5	5.0	5	7.5	7.5
Φd	0.6	0.6	0.6	0.6	0.8	0.8
a	1.5(2.0)	1.5(2.0)	2.0(2.5)	2.0	2.0	2.0

Notes：( ):L≧30mm

■ Multiplier for Ripple Current

Freq. (Hz)		50	120	1K	10K	100K
Coefficient	＜33 μF	0.80	1.00	1.36	1.54	1.80
	≧33 μF	0.85	1.00	1.28	1.35	1.40

Jamicon Series：TC

Teapo Series：SQ

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (120Hz)	Ripple current (mA/rms105℃) (100KHz)
160(200)	22	10x20	195	350
	33	13x20	315	450
	47	13x25	420	600
	68	13x25	420	600
	100	16x25	665	950
	220	18x36	980	1400
200(250)	22	10x20	195	350
	33	13x20	365	520
	47	13x25	420	600
	68	16x25	665	950
	100	16x32	840	1200
250(300)	10	10x20	120	220
	22	8x30	200	360
		13x25	165	300
	27	8x35	215	380
	33	8x35	240	336
		13x25	280	400
	39	8x40	260	360
		10x30	275	500
	47	8x45	310	558
		16x25	505	720
	56	10x40	350	490
	68	10x40	400	560
		16x32	570	810
	82	10x45	450	630
	100	10x50	525	940
		18x36	735	1050
	150	12.5x45	725	1015
350(400)	2.2	10x16	30	50
	3.3	10x16	35	60
	4.7	10x20	45	78
	10	13x20	75	130
	15	8x30	140	250
	22	8x35	180	324
		16x25	115	205
	27	8x40	210	380
	33	8x42	240	336
		16x32	180	255
	39	10x40	280	390
	47	10x45	325	455
		18x32	225	320
	56	10x50	380	530
	68	12.5x40	430	602
	82	12.5x45	500	700
	100	12.5x50	630	880
		18x45	370	530
400(450)	2.2	10x16	80	140
	3.3	10x20	110	195
	4.7	10x25	120	220
	15	8x35	170	306
	10	10x16	135	243
		13x25	200	360
	22	8x40	220	395
		13x20	240	432
		13x25	265	477
		16x25	315	570
	27	8x45	250	350
		10x35	250	350
	33	8x50	295	410
		10x40	295	410
		16x32	490	700

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (120Hz)	Ripple current (mA/rms105℃) (100KHz)
400(450)	39	8x52	320	448
		10x40	320	448
	47	10x45	355	500
		12.5x40	365	510
		16x25	350	490
		18x32	600	860
	56	10x50	405	566
		12.5x40	405	566
	68	10x55	460	640
		12.5x45	460	640
		16x30	510	714
		16x32	550	770
	82	12.5x50	525	735
		12.5x55	620	868
		18x32	680	952
	120	18x32	750	1050
	150	18x36	800	1120
420(470)	15	8x35	150	270
	22	8x40	195	350
	27	8x45	220	396
		10x35	220	396
	33	8x50	285	400
		10x40	285	400
	39	10x42	310	430
		12.5x35	320	448
	47	10x45	350	490
		12.5x40	350	490
	56	10x52	390	545
		12.5x42	390	545
	68	12.5x45	450	630
	82	12.5x52	535	750
450(500)	2.2	10x16	60	110
	3.3	10x20	75	135
	4.7	13x20	105	190
	10	13x25	140	250
	12	8x30	115	210
	15	8x35	135	240
	22	8x42	190	340
		10x30	190	340
		13x20	180	324
		13x25	200	360
		16x32	265	480
	27	8x45	210	378
		10x35	210	378
	33	8x52	290	406
		10x42	290	406
		16x25	350	500
		18x36	455	650
	39	10x45	320	448
		12.5x40	330	460
	47	10x50	360	500
		12.5x42	370	666
		16x25	380	532
	56	12.5x45	415	580
	68	12.5*50	475	665
		18x25	470	658
	82	12.5x55	535	750
		18x36	520	720
	100	18x40	620	860
	120	18x40	650	910
		18x45	720	1000

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.


Jamicon Series：TC
Teapo Series：SQ

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (120Hz)	Ripple current (mA/rms105℃) (100KHz)
500(550)	22	12.5x35	158	280
	33	12.5x45	162	290
	39	12.5x50	168	235
	47	16x40	175	245

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (120Hz)	Ripple current (mA/rms105℃) (100KHz)
500(550)	68	16x45	180	250
	82	16x50	190	260
	100	18x45	200	280
	120	18x50	220	310

Jamicon Series：TH
Teapo Series：TH High Ripple、Low impedance Series

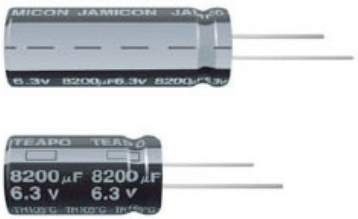

- Endurance: 105℃ 3000 hours
- Recommended Applications : AV(TV, Video, Audio); Monitor/Computer; OA/HA/ Communication; Converter/Inverter; Energy saving lamp; PFC circuit;SMPS; Ballast; Adapter
- Corresponding product to RoHS

SPECIFICATIONS

Item	Characteristics	
Category Temperature Range	-40~+105℃	-25~+105℃
Rated Voltage Range	160 ~ 400VDC	420~450VDC
Rated Capacitance Range	2.2 ~ 220 μF	
Capacitance Tolerance	± 20 % (120Hz , 20℃)	
Leakage Current (20℃)	I=0.06CV +10 μA (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)	

Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)

WV	160	200	250	350	400	420~450
tan δ	0.15	0.15	0.15	0.24	0.24	0.24

Low Temperature Stability Impedance Ratio (MAX)

Z (120Hz) \ WV	160~250	400	420~450
Z(-25℃) / Z(20℃)	3	5	6
Z(-40℃) / Z(20℃)	4	6	—

Endurance


After applying rated voltage with rated ripple current for2000（≥10φ3000） hours at 105℃, the capacitors shall meet the following requirements.

Capacitance change	Within ± 20% of initial value
D.F. (tan δ)	Not more than 200% of specified value
Leakage current	Not more than the specified value

Shelf Life

The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

Dimensions [mm]

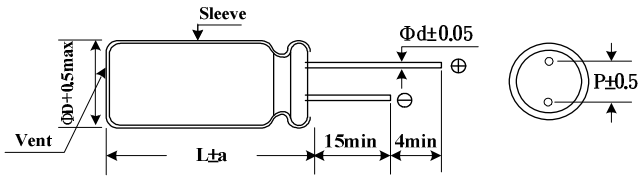

ΦD	10	12.5	16	18
P	5.0	5.0	7.5	7.5
Φd	0.6	0.6	0.8	0.8
a	1.5	2.0	2.0	2.0

Notes：( ):L≧30mm

Multiplier for Ripple Current

Freq. (Hz)	120	1k	10k	100k
160~450	0.5	0.80	0.90	1.00

Jamicon Series：TH
Teapo Series：TH


■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100kHz)	Impedance (Ω,20℃) (100KHz)
160v (200)	10	10x16	220	1.47
	22	10x20	350	0.80
	33	10x20	430	0.62
	47	12.5x20	550	0.50
	68	12.5x20	660	0.39
	100	16x25	890	0.32
	220	16x36	1540	0.17
200v (250)	10	10x16	220	1.47
	22	10x20	350	0.80
	33	12.5x20	460	0.62
	47	12.5x25	610	0.50
	68	12.5x25	730	0.39
	100	16x32	980	0.32
	220	18x36	1640	0.17
250v (300)	4.7	10x16	150	3.45
	10	10x20	240	2.70
	22	12.5x20	380	1.47
	33	12.5x25	510	1.15
	47	16x25	610	0.92
	68	16x32	810	0.71

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100kHz)	Impedance (Ω,20℃) (100KHz)
250v (300)	100	18x36	1110	0.59
	220	18x40	1730	0.31
400v (450)	3.3	10x20	170	2.6
	4.7	10x25	220	2.2
	10	12.5x25	340	1.72
	22	16x25	510	0.94
	33	16x32	690	0.73
	47	16x32	820	0.59
	68	16x32	990	0.46
	100	18x32	1280	0.38
	120	18x36	1480	0.32
	150	18x40	1740	0.26
	180	18x40	1910	0.23
450v (500)	2.2	10x16	110	4.94
	3.3	10x20	150	4.11
	4.7	12.5x20	190	3.47
	10	12.5x25	300	2.72
	22	16x32	500	1.48
	33	16x32	620	1.15
	47	18x32	780	0.92

JAMICON Radial Type Aluminium Electrolytic Capacitors TEAPO

Jamicon Series：TJ
Teapo Series：SG High Ripple、Long life Series

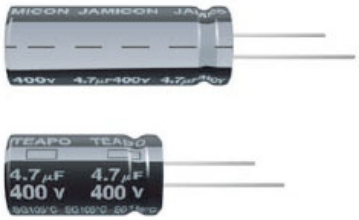

■ Endurance: 105℃ ，5000hours
■ Recommended Applications : High ripple current for Electronic Ballast , Power Supply…etc
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics	
Category Temperature Range	-40~+105℃	-25~+105℃
Rated Voltage Range	160 ~ 450VDC	500VDC
Rated Capacitance Range	3.3 ~ 330 μF	4.7~ 150 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.06CV + 10(μA) (After rated voltage applied for 2 minutes)	I=0.04CV + 100(μA) (After rated voltage applied for 2 minutes)
	I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)	

Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)

WV	160	200	250	350	400	420~450	500
tan δ	0.15	0.15	0.15	0.20	0.24	0.24	0.24

Low Temperature Stability Impedance Ratio (MAX)

Z (120Hz) \ WV	160	200	250	350	400	420~450	500
Z-25℃ / Z+20℃	3	3	3	5	5	6	6
Z-40℃ / Z+20℃	6	6	6	6	6	8	—

Endurance


After applying rated voltage with rated ripple current for 5000 hours at 105℃ ,
the capacitors shall meet the following requirements.

Capacitance change	Within ± 20% of initial value
D.F. (tan δ)	Not more than 200% of specified value
Leakage current	initial specified value or less

Shelf Life

The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

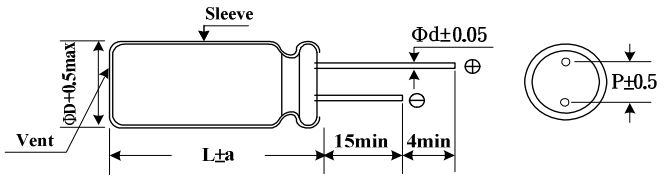

ΦD	8.0	10	12.5	13	16	18	22
P	3.5	5.0	5.0	5.0	7.5	7.5	10.0
Φd	0.6	0.6	0.6	0.6	0.8	0.8	1.0
a	1.5(2.0)	1.5(2.0)	2.0(2.5)	2.0	2.0	2.0	2.0

Notes：( ):L≧30mm

■ Multiplier for Ripple Current

Freq. (Hz)	50,60	120	300	1K	10K~100K
160~450V	0.80	1.00	1.20	1.40	1.60
500V	0.75	1.00	1.20	1.35	1.50

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：TJ

Teapo Series：SG

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
160 (200)	22	10x20	0.15	160
	33	10x20	0.15	210
	47	13x20	0.15	260
	68	13x25	0.15	360
		16x20	0.15	430
	100	16x25	0.15	475
		18x20	0.15	465
	150	16x32	0.15	650
		18x25	0.15	625
	220	16x32	0.15	750
		18x25	0.15	725
	330	18x32	0.15	960
200 (250)	10	10x16	0.15	80
	15	10x16	0.15	100
	22	10x20	0.15	160
	33	10x20	0.15	160
		13x20	0.15	210
	47	13x20	0.15	260
	68	13x25	0.15	360
		16x20	0.15	430
	100	16x25	0.15	475
		18x20	0.15	465
	150	18x25	0.15	650
	220	18x32	0.15	780
250 (300)	10	10x16	0.15	85
		10x20	0.15	100
	22	8x30	0.15	130
		10x25	0.15	145
		13x20	0.15	160
	27	8x32	0.15	150
	33	8x35	0.15	170
		13x20	0.15	210
	39	8x42	0.15	200
	47	8x45	0.15	220
		13x25	0.15	270
		16x20	0.15	275
	56	10x42	0.15	300
	68	10x45	0.15	330
		16x25	0.15	380
		18x20	0.15	375
	82	10x50	0.15	390
	100	12.5x42	0.15	440
		16x32	0.15	520
		18x25	0.15	500
	120	12.5x45	0.15	490
	150	12.5x50	0.15	560
		18x32	0.15	650
	220	18x40	0.15	820
350 (400)	10	10x20	0.20	100
	15	8x35	0.20	120
	22	8x40	0.20	150
		13x20	0.20	160
	27	8x45	0.20	170
	33	8x50	0.20	200
		13x25	0.20	230
		16x20	0.20	250
	39	10x45	0.20	235
	47	10x50	0.20	270
		16x25	0.20	300
		18x20	0.20	315
	56	12.5x40	0.20	300
	68	12.5x45	0.20	400

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
350 (400)	68	16x32	0.2	400
		18x25	0.2	380
	82	12.5x50	0.2	450
	100	12.5x55	0.2	500
		18x32	0.2	530
400 (450)	4.7	10x16	0.24	60
	6.8	10x16	0.24	72
	10	10x16	0.24	85
		10x20	0.24	100
	15	8x35	0.24	110
	22	8x40	0.24	140
		13x20	0.24	145
		13x25	0.24	170
		16x20	0.24	200
	27	8x45	0.24	165
		10x35	0.24	165
	33	8x50	0.24	190
		10x40	0.24	260
		16x25	0.24	260
		18x20	0.24	280
	39	10x45	0.24	300
	47	10x50	0.24	330
		12.5x40	0.24	350
		16x25	0.24	310
		16x32	0.24	345
		18x25	0.24	360
	56	12.5x45	0.24	365
	68	12.5x50	0.24	420
		16x30	0.24	340
		16x32	0.24	350
		18x36	0.24	420
	82	12.5x55	0.24	435
	100	18x32	0.24	465
		18x40	0.24	545
	150	18x40	0.24	600
		22x40	0.24	750
420 (470)	15	8x35	0.24	105
	22	8x40	0.24	135
	27	8x45	0.24	155
		10x35	0.24	155
	33	8x50	0.24	185
		10x40	0.24	185
	39	10x45	0.24	215
		12.5x35	0.24	215
	47	10x50	0.24	245
		12.5x40	0.24	245
	56	12.5x45	0.24	290
	68	12.5x50	0.24	335
	82	12.5x55	0.24	385
450 (500)	3.3	10x20	0.24	60
	4.7	13x20	0.24	80
	6.8	10x20	0.24	90
	10	13x20	0.24	110
		13x25	0.24	110
	12	8x35	0.24	110
	15	8x40	0.24	130
	22	8x45	0.24	165
		10x35	0.24	165
		13x20	0.24	145
		16x25	0.24	190
		18x20	0.24	200
	27	8x52	0.24	195

Jamicon Series：TJ


Teapo Series：SG

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
450 (500)	27	10x40	0.24	195
	33	10x45	0.24	270
		12.5x35	0.24	300
		16x25	0.24	275
		16x32	0.24	315
		18x25	0.24	320
	39	10x50	0.24	335
		12.5x40	0.24	350
	47	10x52	0.24	360
		12.5x45	0.24	365
		16x26	0.24	310
		18x32	0.24	340
	56	12.5x50	0.24	380
	68	12.5x55	0.24	410
		18x25	0.24	360
		18x32	0.24	395
	100	22x40	0.24	580

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
500 (550)	4.7	10x20	0.24	70
	6.8	13x20	0.24	100
	10	12.5x25	0.24	130
	22	16x25	0.24	225
		18x20	0.24	220
	33	16x32	0.24	305
		18x25	0.24	295
	47	16x36	0.24	430
		18x32	0.24	435
	68	18x32	0.24	530
		18x36	0.24	555
	82	18x40	0.24	640
		22x35	0.24	675
	100	22x35	0.24	745
	120	22x40	0.24	865
	150	22x45	0.24	1020

Jamicon Series：TX
Teapo Series：TX High Ripple、Low impedance Series

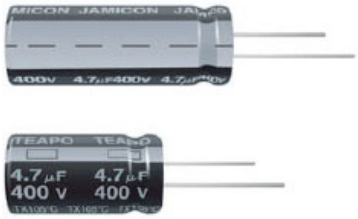

■ Endurance: 105℃，3000~5000hours
■ Recommended Applications : High ripple current for Electronic Ballast , Power Supply…etc
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics	
Category Temperature Range	-40~+105℃	-25~+105℃
Rated Voltage Range	160 ~ 400VDC	450VDC
Rated Capacitance Range	10~ 330 μF	3.3~ 68 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.06CV + 10(μA) (After rated voltage applied for 2 minutes)	I=0.04CV + 100(μA) (After rated voltage applied for 2 minutes)
	I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)	

Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)

WV	160	200	250	350	400	420~450
tan δ	0.15	0.15	0.15	0.20	0.24	0.24

Low Temperature Stability Impedance Ratio (MAX)

Z (120Hz) \ WV	160	200	250	350	400	420~450
Z-25℃ / Z+20℃	3	3	3	5	5	6
Z-40℃ / Z+20℃	6	6	6	6	6	-

Endurance


After applying rated voltage with rated ripple current for3000（≧10φ5000） hours at 105℃，the capacitors shall meet the following requirements.

Capacitance change	Within ± 20% of initial value
D.F. (tan δ)	Not more than 200% of specified value
Leakage current	initial specified value or less

Shelf Life

The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

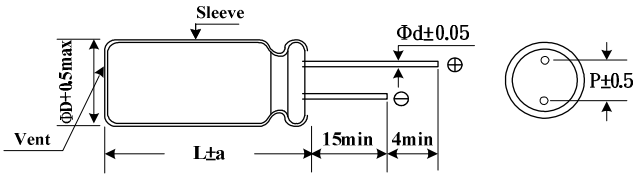

ΦD	10	12.5	16	18
P	5.0	5.0	7.5	7.5
Φd	0.6	0.6	0.8	0.8
a	1.5	2.0	2.0	2.0

Notes：( ):L≧30mm

■ Multiplier for Ripple Current

Freq. (Hz)	120	1k	10k	100k
160~450	0.50	0.80	0.90	1.00

Jamicon Series：TX

Teapo Series：TX

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100Hz)	Impedance (Ω,20℃) (100KHz)
160V (200)	22	10x20	350	1.47
	33	10x20	430	1.15
	47	12.5x20	550	0.92
	68	12.5x25	730	0.71
	100	16x25	890	0.59
	150	16x32	1210	0.41
	220	16x32	1460	0.31
	330	18x36	2010	0.25
200V (250)	22	10x20	350	1.47
	33	12.5x20	460	1.15
	47	12.5x20	550	0.92
	68	12.5x25	730	0.71
	100	16x25	890	0.59
	150	16x32	1210	0.41
	220	18x36	1640	0.31
250V (300)	10	10x20	240	3.18
	22	12.5x20	380	1.74
	33	12.5x25	510	1.35
	47	12.5x25	610	1.08
	68	16x25	730	0.84
	100	16x32	980	0.7

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (100Hz)	Impedance (Ω,20℃) (100KHz)
250V (300)	150	18x32	1290	0.49
	220	18x40	1730	0.36
350V (400)	10	10x20	220	1.94
	22	12.5x20	340	1.6
	33	12.5x25	460	1.25
	47	16x25	560	1.00
	68	16x32	740	0.78
	100	18x36	1010	0.65
400V (450)	10	10x20	290	2.94
	22	12.5x25	460	1.60
	33	12.5x25	620	1.25
	47	16x25	740	1.00
	68	16x32	990	0.78
	100	18x36	1350	0.65
450V (500)	3.3	10x20	150	4.47
	4.7	12.5x20	190	3.77
	10	12.5x25	300	2.95
	22	16x25	450	1.61
	33	16x32	620	1.25
	47	18x32	780	1.01
	68	18x36	990	0.78

Jamicon Series：TF
Teapo Series：SP

High Ripple、Long life Series





■ Endurance: 105℃ ， 8000~10000hours
■ Recommended Applications : Applicable for Electronic Ballast
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics	
Category Temperature Range	-40~+105℃	-25~+105℃
Rated Voltage Range	160 ~ 450VDC	500VDC
Rated Capacitance Range	3.3 ~ 330 μF	10~ 68 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.04CV + 100(μA) ,(After rated voltage applied for2 minutes)	I=0.04CV + 100(μA) (After rated voltage applied for 2 minutes)
	I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)	

Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)

WV	160	200~400	420~450	500
tan δ	0.15	0.15	0.24	0.24

Low Temperature Stability Impedance Ratio (MAX)

WV / Z(120Hz)	160	200	400	420~450	500
Z-25℃ / Z+20℃	3	3	5	6	6
Z-40℃ / Z+20℃	4	4	6	8	-

Endurance


The follwing sprcifications shall be satisfied when the capacitors are restored to 20℃ after subjected to DC voltage with the max ripple current is applies for 10000 hours (8000 hours for φ10) at 105℃.

Capacitance change	Within ± 20% of initial value
D.F. (tan δ)	Not more than 200% of specified value
Leakage current	initial specified value or less

Shelf Life

The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

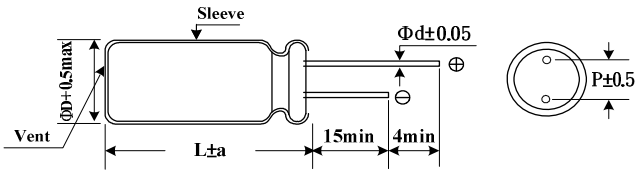

ΦD	10	12.5	13	16	18
P	5.0	5.0		7.5	7.5
Φd	0.6	0.6		0.8	0.8
a	1.5(2.0)	2(2.5)		2.0	2.0

Notes：( ):L≧30mm

■ Multiplier for Ripple Current

Freq. (Hz)	120	1K	10K	100K
Coefficient	1.0	1.6	1.8	2.0

Jamicon Series：TF

Teapo Series：SP


■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (120Hz)	Ripple current (mA/rms105℃) (100KHz)
160 (200)	33	10x20	250	500
	47	10x20	290	580
		12.5x20	330	660
	68	13x25	380	760
		16x20	380	760
	100	13x25	485	970
		16x20	560	1120
		16x25	560	1120
		18x20	560	1120
	150	10x45	410	820
		16x25	600	1200
		16x32	680	1360
		18x25	680	1360
	180	10x50	470	940
	220	12.5x45	550	1100
		16x32	700	1400
		18x25	700	1400
	270	12.5x50	640	1280
	330	12.5x55	740	1480
		18x36	690	1380
200 (250)	22	10x20	250	500
	33	10x20	260	520
		12.5x20	300	600
	47	13x20	330	660
	68	13x25	380	760
		16x20	380	760
	100	16x25	560	1120
		18x20	560	1120
	120	10x50	430	860
	150	12.5x45	510	1320
		16x32	680	1360
	180	12.5x50	590	1180
	220	12.5x52	650	1300
	270	12.5x55	750	1500
250(300)	82	10x52	390	780
	100	12.5x42	470	940
	120	12.5x45	480	960
	150	12.5x50	540	1080
	180	12.5x55	650	1300
350(400)	47	12.5x35	300	600
	68	12.5x45	400	800
	82	12.5x50	475	950
	100	16x40	550	1100
400 (450)	6.8	10x16	110	220
	10	10x20	140	280
	22	12.5x25	215	430
		16x20	215	430
	33	12.5x30	300	600
		16x20	250	500
		16x25	320	640
	39	10x45	260	615
		12.5x35	325	650
	47	12.5x40	310	720
		16x32	420	840
		18x25	420	840
	56	10x52	340	680
		12.5x45	360	720
	68	12.5x50	450	900

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms105℃) (120Hz)	Ripple current (mA/rms105℃) (100KHz)
400(450)	68	18x32	500	1000
	82	12.5x55	460	1060
		16x40	550	1100
	100	16x50	650	1300
420(470)	27	10x40	200	400
	33	10x45	235	470
	39	10x50	170	340
	47	12.5x42	310	620
	56	12.5x45	330	660
	68	12.5x50	390	780
	82	12.5x55	450	900
450 (500)	3.3	10x16	50	100
	4.7	10x20	70	140
	6.8	10x20	75	150
		12.5x20	90	180
	10	10x20	130	260
		12.5x20	160	320
	22	10x40	250	500
		13x20	215	430
		16x20	240	480
		16x25	280	560
		18x20	280	560
	27	10x42	270	540
	33	10x45	350	600
		16x32	350	700
		18x25	350	700
	39	10x50	340	680
		12.5x40	350	700
	47	12.5x45	420	840
		16x36	440	880
		18x20	350	700
		18x25	390	780
		18x32	440	880
	56	12.5x50	450	900
	68	12.5x55	530	1060
		16x40	550	1100
	82	16x45	625	1250
		18x36	625	1250
	100	16x50	750	1550
		18x40	750	1550
500(550)	10	12.5x20	130	260
	15	12.5x25	165	330
		16x20	170	340
	18	12.5x30	195	390
		16x20	185	370
	22	12.5x35	230	460
		16x25	230	460
		18x20	225	450
	27	12.5x40	270	540
		16x25	250	500
	33	16x30	300	600
		18x25	295	590
	39	16x36	355	710
	47	16x40	410	820
		18x30	385	770
	56	18x36	455	910
	68	18x40	515	1030

Jamicon Series：MD
Teapo Series：MD

High Ripple、Long life Series



■Endurance: ：105℃ ， 8000~12000 Hour
■ Recommended Applications : Applicable for Electronic Ballast
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics	
Category Temperature Range	-40~+105℃	-25~+105℃
Rated Voltage Range	160 ~ 450VDC	500VDC
Rated Capacitance Range	6.8 ~ 680 μF	6.8 ~ 39 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.04CV + 100(μA),(After rated voltage applied for2 minutes) I=0.04CV+100(μA),(After rated voltage applied for2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)	

Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)

WV	160	200	250	350	400	420	450	500
tan δ	0.20	0.20	0.20	0.24	0.24	0.24	0.24	0.24

Low Temperature Stability Impedance Ratio (MAX)

WV / Z(120Hz)	160	200	250	350~450	500
Z-25℃ / Z+20℃	3	3	3	5	6
Z-40℃ / Z+20℃	6	6	6	6	—

Endurance

In an environment of 105 ℃, superimpose the rated ripple current within the range of rated voltage, and continuously load the rated voltage to the time specified in the following table:

Product voltage	160~450V	500V
Life（Hrs）	Below 20L: 10000 hours Above 25L: 12000 hours	φ 10:8000 hours φ Above 12.5: 10.000 hours


When the temperature is restored to 20 ℃ for measurement, the following requirements should be met:

Capacitance change	Within ± 20% of initial value
D.F. (tan δ)	Not more than 200% of specified value
Leakage current	initial specified value or less

Shelf Life

After 1000 hours of continuous storage at 105 ℃, the temperature should be restored to 20 ℃ for measurement. Before measurement, pre experimental treatment should be carried out (refer to Article 4.1 of JIS C 5101-4 for treatment methods). The capacitor should meet the same requirements as durability

■ 尺寸图

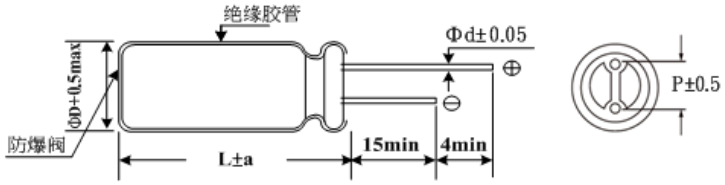

ΦD	10	12.5	13	16	18
P	5.0	5.0		7.5	7.5
Φd	0.6	0.6		0.8	0.8
a	1.5(2.0)	2(2.5)		2.0	2.0

Notes：( ):L≧30mm

■ Multiplier for Ripple Current

Freq. (Hz)	120	1K	10K	100K
Coefficient	1.0	1.6	1.8	2.0

Jamicon Series：MD
Teapo Series：MD

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
160（200）	39	10x16	0.2	245
	56	10x20	0.2	315
	82	10x30	0.2	445
	100	12.5x20	0.2	575
	120	10x35	0.2	570
	150	10x45	0.2	695
		12.5x25	0.2	765
	180	10x50	0.2	785
		12.5x30	0.2	885
		16x20	0.2	855
	220	12.5x35	0.2	1040
		16x25	0.2	1020
		18x20	0.2	990
	270	12.5x45	0.2	1230
	330	12.5x50	0.2	1400
		18x25	0.2	1290
	390	16x36	0.2	1500
	470	16x40	0.2	1700
		18x36	0.2	1715
	560	16x50	0.2	1920
		18x40	0.2	1905
	680	18x50	0.2	2145
200（250）	27	10x16	0.2	200
	47	10x20	0.2	290
	56	10x25	0.2	345
	68	10x30	0.2	405
	82	12.5x20	0.2	520
	100	10x35	0.2	520
		12.5x25	0.2	625
	120	10x45	0.2	620
		12.5x30	0.2	725
		16x20	0.2	695
	150	10x50	0.2	720
		12.5x35	0.2	860
	180	16x25	0.2	925
		18x20	0.2	895
	220	12.5x45	0.2	1110
		18x25	0.2	1050
	270	12.5x50	0.2	1265
		16x36	0.2	1250
	330	16x40	0.2	1425
		18x32	0.2	1395
	390	16x45	0.2	1575
		18x36	0.2	1565
	470	16x50	0.2	1755
		18x45	0.2	1770
	560	18x50	0.2	1945
250（300）	22	10x16	0.2	185
	33	10x20	0.2	240
	47	10x30	0.2	340
	56	12.5x20	0.2	430
	68	10x35	0.2	430
	82	10x45	0.2	515
		12.5x25	0.2	565
	100	10x50	0.2	585
		12.5x30	0.2	660
		16x20	0.2	635
	120	12.5x35	0.2	770
		16x25	0.2	755
		18x20	0.2	730
	150	12.5x45	0.2	920
	180	12.5x50	0.2	1035
		16x32	0.2	995
		18x25	0.2	950
	220	16x36	0.2	1125
		18x32	0.2	1135
	270	16x45	0.2	1310
		18x36	0.2	1300
	330	16x50	0.2	1475
		18x45	0.2	1485
	390	18x50	0.2	1625

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
350（400）	12	10x16	0.24	135
	22	10x20	0.24	200
	27	10x30	0.24	255
	33	12.5x20	0.24	330
	39	10x35	0.24	325
	47	10x40	0.24	375
		12.5x25	0.24	425
	56	10x45	0.24	425
		12.5x30	0.24	495
		16x20	0.24	475
	68	10x50	0.24	485
		12.5x35	0.24	580
		18x20	0.24	550
	82	12.5x40	0.24	655
		16x25	0.24	625
	100	12.5x50	0.24	770
		16x32	0.24	740
		18x25	0.24	710
	120	16x36	0.24	835
	150	16x45	0.24	975
		18x32	0.24	940
	180	16x50	0.24	1090
		18x36	0.24	1065
	220	18x50	0.24	1220
400（450）	10	10x16	0.24	125
	18	10x20	0.24	180
	22	10x25	0.24	215
	27	10x30	0.24	255
		12.5x20	0.24	300
	33	10x35	0.24	300
	39	10x45	0.24	355
		12.5x25	0.24	390
	47	12.5x30	0.24	455
		16x20	0.24	435
	56	10x50	0.24	440
		12.5x35	0.24	525
		18x20	0.24	500
	68	12.5x40	0.24	600
		16x25	0.24	570
	82	12.5x50	0.24	700
		16x32	0.24	670
		18x25	0.24	640
	100	16x36	0.24	760
	120	16x45	0.24	875
		18x36	0.24	870
	150	16x50	0.24	995
		18x40	0.24	958
	180	18x45	0.24	1095
	220	18x50	0.24	1220
420（470）	6.8	10x16	0.24	105
	12	10x20	0.24	150
	15	10x25	0.24	185
	18	10x30	0.24	215
	22	12.5x20	0.24	285
	27	10x35	0.24	275
		10x40	0.24	290
	33	10x45	0.24	335
		12.5x30	0.24	400
		16x20	0.24	385
	39	10x50	0.24	375
	47	12.5x35	0.24	505
		16x25	0.24	500
		18x20	0.24	480
	56	12.5x45	0.24	590
	68	12.5x50	0.24	670
		16x32	0.24	645
		18x25	0.24	615
	82	16x36	0.24	725
		18x32	0.24	730
	100	16x45	0.24	840
		18x36	0.24	835


Jamicon Series：MD
Teapo Series：MD

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
420（470）	120	18x45	0.24	945
	150	18x50	0.24	1060
450（550）	6.8	10x16	0.24	105
	12	10x20	0.24	150
	15	10x25	0.24	185
	18	10x30	0.24	215
		12.5x20	0.24	255
	22	10x35	0.24	250
	27	10x45	0.24	305
		12.5x25	0.24	340
	33	12.5x30	0.24	400
		16x20	0.24	385
	39	10x50	0.24	375
		12.5x35	0.24	460
		18x20	0.24	440
	47	12.5x40	0.24	525
		16x25	0.24	500
	56	12.5x45	0.24	590
		16x32	0.24	585
		18x25	0.24	560
	68	12.5x50	0.24	670
		16x36	0.24	660

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
450（550）	82	16x45	0.24	760
		18x32	0.24	730
	100	16x50	0.24	855
		18x36	0.24	835
	120	18x45	0.24	945
	150	18x50	0.24	1060
500（550）	6.8	10x20	0.24	90
	8.2	10x25	0.24	110
	10	10x30	0.24	130
	12	12.5x20	0.24	135
	15	10x40	0.24	175
	15	12.5x25	0.24	165
	18	10x45	0.24	190
	18	12.5x30	0.24	190
	22	10x50	0.24	230
	22	12.5x35	0.24	220
	27	12.5x40	0.24	260
	33	12.5x45	0.24	285
	39	12.5x50	0.24	330

Jamicon Series：TR
Teapo Series：SU High Ripple、Long life Series

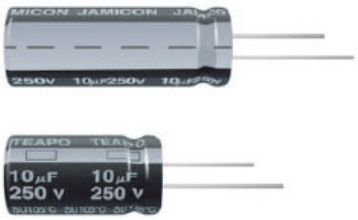

■ Endurance：105℃ 10000~12000hours
■ Recommended Applications : Electronic lighting and power
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃
Rated Voltage Range	160~450VDC
Rated Capacitance Range	6.8 ~ 560μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.04CV +100μA . (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)

Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)

WV	160	200	250	350	400	450
tan δ	0.15	0.15	0.15	0.20	0.20	0.20

Low Temperature Stability Impedance Ratio (MAX)

WV / Z(120Hz)	160	200	250	350	400	450
Z-25℃ / Z+20℃	3	3	3	5	5	6
Z-40℃ / Z+20℃	6	6	6	6	6	8

Endurance

After applying rated voltage with rated ripple current for 10000~12000hours at 105℃, the capacitors shall meet the following requirements.


Capacitance change	Within ± 20% of initial value
D.F. (tan δ)	Not more than 200% of specified value
Leakage current	initial specified value or less

ΦDxL	Life time (hours)
10Φ	10000
≧13Φ	12000

Shelf Life

The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

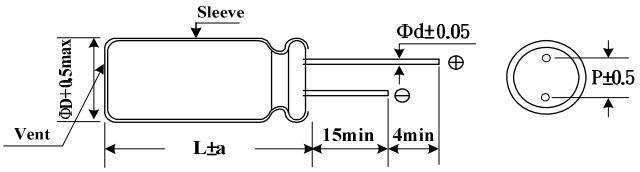

ΦD	10.0	12.5	13.0	16.0	18.0
P	5.0	5.0		7.5	7.5
Φd	0.6	0.6		0.8	0.8
a	1.5(2.0)	2.0(2.5)		2.0	2.0

Notes：( ):L≧30mm

■ Multiplier for Ripple Current

■ Multiplier for Ripple Current	120	1K	10K	100K
coefficient	0.5	0.8	0.9	1.0

Jamicon Series：TR

Teapo Series：SU

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (100KHz)
160 (200)	33	10x16	0.15	500
	47	10x20	0.15	580
	68	13x20	0.15	720
	100	13x25	0.15	970
	150	16x25	0.15	1120
	220	16x32	0.15	1300
	330	18x36	0.15	1380
	560	18x50	0.15	2086
200 (250)	22	10x16	0.15	500
	33	10x20	0.15	520
	47	13x20	0.15	660
	68	13x25	0.15	720
	100	16x25	0.15	1120
	150	16x32	0.15	1620
	220	18x32	0.15	2080
	390	18x50	0.15	3380
250(300)	10	10x16	0.15	320
	22	10x20	0.15	500
	33	13x20	0.15	800
	47	13x20	0.15	980
	100	16x25	0.15	1530
	150	18x25	0.15	1940
	220	18x36	0.15	2753
	330	18x50	0.15	3912
350(400)	6.8	10x16	0.20	280
	10	10x20	0.20	350
		13x20	0.20	450

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (100KHz)
350(400)	22	13x20	0.20	650
	33	13x25	0.20	900
	47	16x25	0.20	1000
	68	16x32	0.20	1100
400 (450)	6.8	10x16	0.20	220
	10	10x20	0.20	280
	18	10x20	0.20	375
	22	13x20	0.20	430
	33	16x20	0.20	500
		16x25	0.20	640
	47	16x20	0.20	685
		16x32	0.20	840
	68	18x32	0.20	1000
	100	18x50	0.20	1385
450 (500)	4.7	10x16	0.20	156
	10	10x20	0.20	260
		13x16	0.20	275
	15	13x20	0.20	355
	22	13x20	0.20	430
		13x25	0.20	500
		16x20	0.20	500
	33	16x25	0.20	620
	47	16x25	0.20	740
		16x36	0.20	900
	68	16x36	0.20	1150
	100	18x50	0.20	1660

Jamicon Series：TS
Teapo Series：TS High Ripple、Long life Series





■ Endurance：105℃ 15000~20000hours
■ Recommended Applications : Electronic lighting and power
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃
Rated Voltage Range	160~450VDC
Rated Capacitance Range	6.8 ~ 220μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.04CV +100μA . (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)

Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)

WV	160	200	250	350	400	450
tan δ	0.15	0.15	0.15	0.20	0.20	0.20

Low Temperature Stability Impedance Ratio (MAX)

WV / Z(120Hz)	160	200	250	350	400	450
Z-25℃ / Z+20℃	3	3	3	5	5	6
Z-40℃ / Z+20℃	6	6	6	6	6	8

Endurance


After applying rated voltage with rated ripple current for 20000hours（10*12.5=15000Hrs） at 105℃, the capacitors shall meet the following requirements.

Capacitance change	Within ± 30% of initial value
D.F. (tan δ)	Not more than 300% of specified value
Leakage current	initial specified value or less

Shelf Life

The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

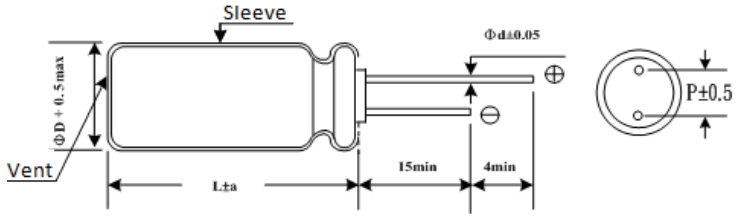

ΦD	10.0	13.0	16.0	18.0
P	5.0	5.0	7.5	7.5
Φd	0.6	0.6	0.8	0.8
a	1.5	2.0	2.0	2.0

■ Multiplier for Ripple Current

Freq.(Hz)	120	1K	10K	100K
coefficient	1.00	1.75	2.25	2.50

Jamicon Series：TS

Teapo Series：TS

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
160 (200)	22	10x12.5	0.15	121
	33	10x16	0.15	158
	47	10x20	0.15	204
	68	13x20	0.15	284
	100	16x20	0.15	388
	220	18x32	0.15	715
200 (250)	22	10x16	0.15	138
	33	10x20	0.15	187
	47	13x20	0.15	259
	68	16x20	0.15	351
	100	16x25	0.15	468
	150	18x32	0.15	613
250(300)	10	10x12.5	0.15	90
	22	10x20	0.15	162
	33	13x20	0.15	229
	47	16x20	0.15	309
	100	18x25	0.15	530

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
350(400)	6.8	10x12.5	0.20	80
	10	10x16	0.20	107
	22	13x20	0.20	204
	33	16x20	0.20	281
	47	16x25	0.20	369
	68	18x25	0.20	475
400 (450)	6.8	10x16	0.20	80
	10	10x20	0.20	106
	22	16x20	0.20	207
	33	16x25	0.20	279
	47	16x32	0.20	371
	68	18x25	0.20	476
450 (500)	10	10x20	0.20	92
	22	13x25	0.20	240
	33	16x25	0.20	368
	47	18x25	0.20	480
	68	18x32	0.20	520

JAMICON Radial Type Aluminium Electrolytic Capacitors TEAPO

Jamicon Series：WB
Teapo Series：AK

High Temperature、 Ultra Long Life Series





■ Endurance: 125℃ 2000~5000hrs
■ Recommended Applications :Applicable for Electronic Ballast,Lighting Ballast
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics	
Category Temperature Range	-40 ~ +125℃	-25 ~ +125℃
Rated Voltage Range	10~63VDC	160~450VDC
Rated Capacitance Range	47~ 4700μF	1~150μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)	
Leakage Current (20℃)	I=0.01CV or 3(μA)whichever is greater.	I=0.1CV+40 uA (CV≦1000) I=0.04CV+100 uA (CV>1000)
	(After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)	

Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)

WV	10	16	25	35	50	63	160~250	350~450
tan δ	0.19	0.16	0.14	0.12	0.14	0.14	0.20	0.24

When nominal capacitance is over 1000uF,tan δ shall be added 0.02 to the listed value with increase of every 1000uF.
Down Size tan δ added 0.03.

Low Temperature Stability Impedance Ratio (MAX)

WV / Z(120Hz)	10	16	25	35	50	63	160~250	350~450
Z-25℃ / Z+20℃	3	2	2	2	2	2	3	6
Z-40℃ / Z+20℃	6	4	4	4	4	3	—	—

Endurance

After applying rated voltage with rated ripple current for 2000~5000 hours at125℃ ,
the capacitors shall meet the following requirements.


Rated Voltage Range	10~63VDC			160~450VDC
Capacitance Change	Within ± 30 % of initial value			Within ± 20 % of initial value
Dissipation Factor	≦300% of initial specified value			≦ 200% of the initial specified value
Leakage Current	≦initial specified value or less			≦ initial specified value
DΦ	≦8Φ,10ΦL<15mm	10ΦL≧15mm	≧13Φ	2000Hrs
Life	2000Hrs	3000Hrs	5000Hrs	

Shelf Life

The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 125℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

Rated Voltage Range	10~63VDC	160~450VDC
Capacitance Change	Within ± 30 % of initial value	Within ± 20 % of initial value
Dissipation Factor	≦300% of initial specified value	≦ 200% of the initial specified value
Leakage Current	≦500% of initial specified value	≦ 500% of the initial specified value

■ Dimensions [mm]

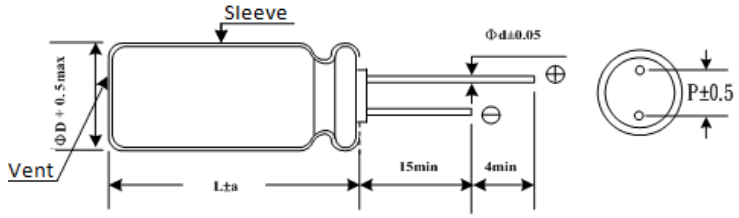

ΦD	8	10	13	16	18
P	3.5	5.0	5.0	7.5	7.5
Φd	0.6	0.6	0.6	0.8	0.8
a	1.5	1.5	2.0	2.0	2.0

■ Multiplier for Ripple Current

Freq. (Hz)		120	1K	10K	50K~100K
10~63WV	CAP≦10	0.40	0.75	0.90	1.00
	10<CAP≦100	0.50	0.85	0.95	1.00
	100<CAP≦1000	0.60	0.88	0.96	1.00
	1000<CAP	0.75	0.90	0.98	1.00
160~450WV	CAP≦33	1.00	1.50	1.75	1.80
	CAP≧47	1.00	1.30	1.40	1.50

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：WB

Teapo Series：AK

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms125℃) (100KHz)
10(13)	47	6.3x11	0.19	80
	100	6.3x11	0.19	150
	220	8x11	0.19	340
	330	10x12.5	0.19	500
	470	10x16	0.19	630
	1000	10x20	0.19	770
	2200	13x25	0.21	1250
	3300	16x25	0.23	1380
	4700	16x32	0.25	1450
16(20)	33	6.3x11	0.16	75
	47	6.3x11	0.16	90
	100	8x11	0.16	170
	220	8x11	0.16	340
	330	10x12.5	0.16	500
	470	10x20	0.16	770
	1000	13x20	0.16	920
	2200	16x25	0.18	1380
	3300	16x32	0.20	1450
	4700	16x32	0.22	1720
25(32)	22	6.3x11	0.14	70
	33	8x11	0.14	110
	47	8x11	0.14	130
	100	8x11	0.14	340
	220	10x12.5	0.14	500
	330	10x16	0.14	630
	470	10x20	0.14	770
	1000	13x25	0.14	1250
	2200	16x32	0.16	1450

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms125℃) (100KHz)
35(44)	22	8x11	0.12	100
	33	8x11	0.12	120
	47	8x11	0.12	140
	100	10x12.5	0.12	340
	220	10x16	0.12	500
	330	10x20	0.12	770
	470	13x20	0.12	920
	1000	16x25	0.12	1380
50(63)	10	8x11	0.14	70
	22	8x11	0.14	110
	33	8x11	0.14	130
	47	8x11	0.14	245
	100	10x12.5	0.14	415
	220	10x20	0.14	491
	330	13x20	0.14	665
	470	13x25	0.14	995
	1000	16x32	0.14	1280
63(79)	47	8x11	0.14	245
	100	10x15	0.14	455
	220	13x20	0.14	665
	330	13x25	0.14	995
	470	16x25	0.14	1000

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms125℃) (120Hz)
160(200)	33	10x20	0.20	111
	47	12.5x20	0.20	150
	68	12.5x25	0.20	196
	82	16x20	0.20	217
	100	16x25	0.20	263
	150	18x25	0.20	336
200(250)	33	10x20	0.20	111
	47	12.5x20	0.20	148
	68	12.5x25	0.20	191
	82	16x20	0.20	207
	100	16x25	0.20	263
250(300)	18	10x20	0.20	84
	27	12.5x20	0.20	114
	33	12.5x25	0.20	137
	47	16x20	0.20	164
	68	16x25	0.20	211
	82	18x25	0.20	248

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms125℃) (120Hz)
350(400)	15	10x20	0.24	74
	22	12.5x20	0.24	101
	33	12.5x25	0.24	132
	56	16x25	0.24	192
	68	18x25	0.24	226
	82	18x32	0.24	276
400(450)	12	10x20	0.24	68
	18	12.5x20	0.24	86
	22	12.5x25	0.24	105
	33	16x20	0.24	138
	47	18x25	0.24	188
	68	18x32	0.24	251
450(500)	10	10x20	0.24	61
	15	12.5x20	0.24	84
	22	16x20	0.24	112
	33	16x25	0.24	146
	47	18x25	0.24	187
	68	18x36	0.24	264

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：WF
Teapo Series：AR High Temperature、Low impedance、Ultra Long Life Series






- Endurance: 125℃ 3000~5000hrs
- Recommended Applications： Applicable for Electronic Ballast,Lighting Ballast
- Corresponding product to RoHS

SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +125℃
Rated Voltage Range	25~63VDC
Rated Capacitance Range	470~ 6800 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.03CV or 4(μA)whichever is greater. (After rated voltage applied for 1 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 25 / 35 / 50 / 63 tan δ: 0.14 / 0.12 / 0.14 / 0.14 When nominal capacitance is over 1000 μF,tan δ shall be added 0.02 to the listed value with increase of every 1000 μF.
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120Hz): 25 / 35 / 50 / 63 Z-25℃ / Z+20℃: 2 / 2 / 2 / 2 Z-40℃ / Z+20℃: 4 / 4 / 4 / 4
Endurance	After applying rated voltage with rated ripple current for 3000~5000 hours at 125℃, the capacitors shall meet the following requirements. Rated Voltage Range: 25~63VDC Capacitance change: Within ±30% of initial value D.F. (tan δ): Not more than300% of specified value Leakage current: initial specified value or less L(height): L≦20mm / L≧25mm Life: 3000Hrs / 5000Hrs
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 125℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4. Rated Voltage Range: 25~63VDC Capacitance change: Within ±30% of initial value D.F. (tan δ): Not more than300% of specified value Leakage current: initial specified value or less

Dimensions [mm]

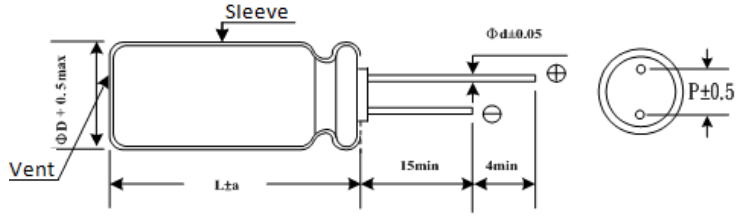

ΦD	13	16	18
P	5.0	7.5	7.5
Φd	0.6	0.8	0.8
a	2.0	2.0	2.0

Multiplier for Ripple Current

Freq. (Hz)		120	1K	10K	100K
25~63WV	CAP:470~560 μF	0.50	0.85	0.94	1.00
	CAP:620~1800 μF	0.60	0.87	0.95	1.00
	CAP:2200~3900 μF	0.75	0.90	0.95	1.00
	CAP:4700~6800 μF	0.85	0.95	0.98	1.00


Jamicon Series：WF
Teapo Series：AR


■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms125℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
25(32)	1200	13x20	1820	0.046
	1800	13x25	2280	0.040
		16x20	2280	0.036
	2200	13x30	2560	0.031
	2700	13x35	2970	0.027
		16x25	2860	0.028
		18x20	2490	0.036
	3300	13x40	3340	0.023
		16x30	3160	0.025
	3900	16x36	3590	0.022
		18x25	3010	0.026
	4700	18x30	3390	0.022
	5600	16x40	3970	0.018
		18x36	3840	0.020
	6800	18x40	4230	0.017
35(44)	680	13x20	1820	0.046
	1000	13x25	2280	0.040
	1200	13x30	2560	0.031
		16x20	2280	0.036
	1500	13x35	2970	0.027
		18x20	2490	0.036
	1800	13x40	3340	0.023
		16x25	2860	0.028
	2200	16x30	3160	0.025
		18x25	3010	0.026
	2700	16x36	3590	0.022
		18x30	3390	0.022
	3300	16x40	3970	0.018

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms125℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
35(44)	3300	18x36	3840	0.020
	4700	18x40	4230	0.017
50(63)	470	13x20	1500	0.095
	680	13x25	1900	0.078
		16x20	2040	0.073
	820	13x30	2150	0.071
	1000	13x35	2510	0.064
		16x25	2620	0.061
		18x20	2240	0.069
	1200	13x40	2870	0.058
		16x30	2940	0.057
		18x25	2750	0.059
	1500	16x36	3300	0.053
	1800	18x30	3140	0.056
	2200	16x40	3720	0.050
		18x36	3510	0.052
	2700	18x40	3940	0.048
63(79)	470	16x20	1790	0.105
	680	16x25	2030	0.085
		18x20	1910	0.095
	820	16x30	2330	0.073
	1000	16x36	2580	0.064
		18x25	2280	0.069
	1200	16x40	2900	0.056
		18x30	2580	0.061
	1500	18x36	2890	0.055
	1800	18x40	3210	0.050

Jamicon Series：AY
Teapo Series：AY High Temperature、Low impedance、Ultra Long Life Series







■ Endurance: 125℃ 3000~5000hrs
■ Resistance to vibration：40G（Capacitor must be clamped by the body for vibration rating）
■ Recommended application: Suitable for designs with strict requirements for vibration resistance and temperature, such as electric power steering systems and control motors.
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +125℃
Rated Voltage Range	25~100VDC
Rated Capacitance Range	200~ 6800μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.03CV or 4(μA)whichever is greater. (After rated voltage applied for 1 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 25 / 35 / 50 / 63 / 80 / 100 tan δ: 0.14 / 0.12 / 0.14 / 0.14 / 0.14 / 0.14 When nominal capacitance is over 1000μF,tan δ shall be added 0.02 to the listed value with increase of every 1000μF.
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120Hz): 25 / 35 / 50 / 63 / 80 / 100 Z-25℃ / Z+20℃: 2 / 2 / 2 / 2 / 2 / 2 Z-40℃ / Z+20℃: 4 / 4 / 4 / 4 / 4 / 4
Endurance	After applying rated voltage with rated ripple current for 3000~5000 hours at 125℃, the capacitors shall meet the following requirements. Rated Voltage Range: 25~100VDC Capacitance change: Within ±30% of initial value D.F. (tan δ): Not more than300% of specified value Leakage current: initial specified value or less L(height): L≦20mm / L≧25mm Life: 3000Hrs / 5000Hrs
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 125℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4. Rated Voltage Range: 25~100VDC Capacitance change: Within ±30% of initial value D.F. (tan δ): Not more than300% of specified value Leakage current: initial specified value or less

■ Dimensions [mm]

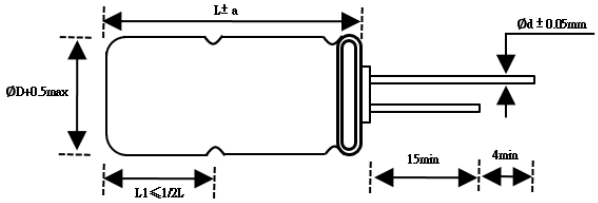



ΦD	13	16	18
P	5.0	7.5	7.5
Φd	0.6	0.8	0.8
a	2.0	2.0	2.0

■ Multiplier for Ripple Current

Freq. (Hz)		120	1K	10K	100K
25~63WV	CAP:200~560μF	0.50	0.85	0.94	1.00
	CAP:620~1800μF	0.60	0.87	0.95	1.00
	CAP:2200~3900μF	0.75	0.90	0.95	1.00
	CAP:4700~6800μF	0.85	0.95	0.98	1.00

Jamicon Series：AY

Teapo Series：AY

■STANDARD RATINGS


Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms125℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
25(32)	1200	13x20	1820	0.046
	1800	13x25	2280	0.040
		16x20	2280	0.036
	2200	13x30	2560	0.031
	2700	13x35	2970	0.027
		16x25	2860	0.028
		18x20	2490	0.036
	3300	13x40	3340	0.023
		16x30	3160	0.025
	3900	16x36	3590	0.022
		18x25	3010	0.026
	4700	18x30	3390	0.022
	5600	16x40	3970	0.018
		18x36	3840	0.020
	6800	18x40	4230	0.017
35(44)	680	13x20	1820	0.046
	1000	13x25	2280	0.040
	1200	13x30	2560	0.031
		16x20	2280	0.036
	1500	13x35	2970	0.027
		18x20	2490	0.036
	1800	13x40	3340	0.023
		16x25	2860	0.028
	2200	16x30	3160	0.025
		18x25	3010	0.026
	2700	16x36	3590	0.022
		18x30	3390	0.022
	3300	16x40	3970	0.018
	3300	18x36	3840	0.020
	4700	18x40	4230	0.017
50(63)	470	13x20	1500	0.095
	680	13x25	1900	0.078
		16x20	2040	0.073
	820	13x30	2150	0.071
	1000	13x35	2510	0.064
		16x25	2620	0.061
		18x20	2240	0.069

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (mA/rms125℃) (100KHz)	Impedance (Ω,20℃) (100KHz)
50(63)	1200	13x40	2870	0.058
		16x30	2940	0.057
		18x25	2750	0.059
	1500	16x36	3300	0.053
	1800	18x30	3140	0.056
	2200	16x40	3720	0.050
		18x36	3510	0.052
	2700	18x40	3940	0.048
63(79)	470	16x20	1790	0.105
	680	16x25	2030	0.085
		18x20	1910	0.095
	820	16x30	2330	0.073
	1000	16x36	2580	0.064
		18x25	2280	0.069
	1200	16x40	2900	0.056
		18x30	2580	0.061
	1500	18x36	2890	0.055
	1800	18x40	3210	0.050
80（100）	330	16x20	1790	0.106
	470	16x25	2030	0.077
		18x20	1910	0.086
	560	16x30	2330	0.070
		18x25	2280	0.065
	680	16x35	2580	0.058
		18x30	2580	0.055
	820	16x40	2900	0.053
		18x35	2890	0.051
	1200	18x40	3210	0.050
100（125）	200	16x20	1580	0.135
	270	18x20	1690	0.122
	300	16x25	1990	0.118
	360	16x30	2250	0.105
	390	18x25	2110	0.097
	470	16x35	2500	0.092
	510	18x30	2410	0.088
	560	16x40	2700	0.084
	620	18x40	2690	0.075

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：WH
Teapo Series：AT

High Temperature、Ultra Long Life Series

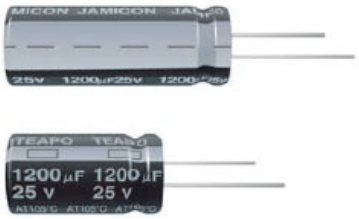

- Endurance: 130℃ 1000~4000hours
- Recommended Applications： Applicable for Electronic Ballast,Lighting Ballast
- Corresponding product to RoHS

SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +130℃ -25~+130℃
Rated Voltage Range	10~100VDC 400~450VDC
Rated Capacitance Range	22~ 4700 μF 3.3~82 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.03CV or 4(μA)whichever is greater. (After rated voltage applied for 1 minutes) I：Max. leakage current (μA), C：Nominal capacitance (μF), V：Rated voltage (V)

Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)

WV	10	16	25	35	50	63	80	100	400~450
tan δ	0.20	0.16	0.14	0.12	0.10	0.09	0.14	0.14	0.24

When nominal capacitance is over 1000 μF,tan δ shall be added 0.02 to the listed value with increase of every 1000 μF.

Low Temperature Stability Impedance Ratio (MAX)

WV / Z(120Hz)	10	16	25	35	50	63	80	100	400~450
Z-25℃ / Z+20℃	3	2	2	2	2	2	2	2	6
Z-40℃ / Z+20℃	6	4	4	4	4	4	4	4	-

Endurance

After applying rated voltage with rated ripple current for 1000~4000 hours at 130℃, when the capacitors are restored to 20℃, the capacitors shall meet the following requirements.


Rated Voltage Range	10~100VDC			400~450VDC	
Capacitance change	Within ±30% of initial value			Within ±20% of initial value	
D.F. (tan δ)	Not more than300% of specified value			Not more than200% of specified value	
Leakage current	initial specified value or less			initial specified value or less	
DΦ	5~6.3Φ	8~10Φ	≧12.5Φ	8~10Φ	≧12.5Φ
Life(hours)	1000	2000	4000	2000	3000

Shelf Life

The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 130℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

Rated Voltage Range	10~100VDC	400~450VDC
Capacitance change	Within ±30% of initial value	Within ±20% of initial value
D.F. (tan δ)	Not more than300% of specified value	Not more than200% of specified value
Leakage current	initial specified value or less	initial specified value or less

Dimensions [mm]

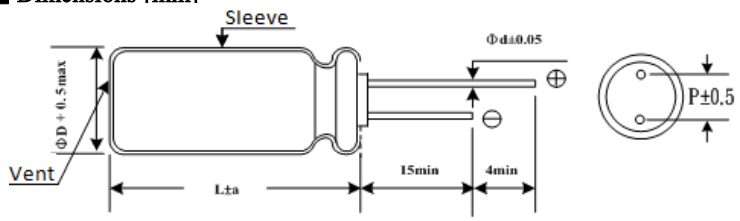

ΦD	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
a	1.5	1.5	1.5	1.5	2.0	2.0	2.0

Multiplier for Ripple Current

Freq. (Hz)		120	1K	10K	≧100K
10~100WV	CAP:22~47 μF	0.55	0.75	0.90	1.00
	CAP:68~330 μF	0.70	0.85	0.95	1.00
	CAP:470~1500 μF	0.75	0.90	0.98	1.00
	CAP:2200~4700 μF	0.80	0.95	1.00	1.00
400~450WV	CAP:≦15 μF	0.50	0.60	0.90	1.00
	CAP:＞15 μF	0.55	0.80	0.90	1.00

Jamicon Series：WH
Teapo Series：AT


■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms130℃) (100KHz)
10(13)	330	8x11	0.20	360
	470	10x12.5	0.20	620
	1000	10x20	0.20	960
	2200	12.5x25	0.22	1430
	3300	16x25	0.24	1900
	4700	16x30	0.26	2300
16(20)	330	8x11	0.16	360
	470	10x12.5	0.16	620
	1000	10x20	0.16	960
	2200	12.5x25	0.18	1430
	3300	16x30	0.20	2300
	4700	16x35	0.22	2550
25(32)	47	5x11	0.14	130
	68	6.3x11	0.14	170
	220	8x11	0.14	360
	330	10x12.5	0.14	620
	470	10x20	0.14	800
	1000	12.5x25	0.14	1100
	2200	16x30	0.16	2300
	3300	16x35	0.18	2500
35(44)	100	8x11	0.12	360
	220	10x12.5	0.12	620
	330	10x16	0.12	800
	470	10x20	0.12	960
	1000	12.5x25	0.12	1430
	2200	16x35	0.14	2550
	3300	18x35	0.16	2800
50(63)	22	5x11	0.10	200
	33	6.3x11	0.10	250
	47	8x11	0.10	300
		6.3x12	0.10	260
	100	10x12.5	0.10	520
	220	10x20	0.10	890
	330	12.5x20	0.10	1000
	470	12.5x25	0.10	1200
	1000	16x30	0.10	2180
	2200	18x40	0.12	2800
63(79)	33	8x11	0.09	250
	47	10x12.5	0.09	400
	100	10x16	0.09	450
	220	12.5x20	0.09	820
	330	12.5x25	0.09	1000
	470	16x25	0.09	1500
	1000	16x30	0.09	1850
	1500	18x40	0.09	2350

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms130℃) (100KHz)
80（100）	33	8x11	0.08	325
	47	10x12.5	0.08	410
	100	10x20	0.08	675
	220	12.5x25	0.08	1050
	330	12.5x31.5	0.08	1310
	470	16x25	0.08	1420
	1000	18x40	0.08	2350
100（125）	33	10x12.5	0.08	330
	47	10x16	0.08	390
	100	12.5x20	0.08	590
	220	16x25	0.08	1170
	330	16x30	0.08	1650
	470	18x35	0.08	2150
	560	18x40	0.08	2285
400（450）	3.3	8x16	0.24	110
	4.7	8x20	0.24	120
	5.6	10x16	0.24	130
	6.8	10x20	0.24	150
	10	10x25	0.24	220
	15	10x30	0.24	240
	22	12.5x20	0.24	270
	33	12.5x25	0.24	305
	47	16x25	0.24	400
	56	16x30	0.24	435
	68	16x35	0.24	480
	82	18x30	0.24	525
420（470）	3.3	8x16	0.24	120
	4.7	8x20	0.24	130
	5.6	10x16	0.24	140
	6.8	10x20	0.24	155
	10	10x25	0.24	240
	15	10x30	0.24	255
	22	12.5x25	0.24	300
	33	12.5x30	0.24	340
	47	16x30	0.24	345
	56	16x40	0.24	385
	68	18x35	0.24	420
450（500）	3.3	8x20	0.24	135
	4.7	10x16	0.24	150
	5.6	10x20	0.24	160
	6.8	10x25	0.24	170
	10	12.5x20	0.24	260
	15	12.5x25	0.24	300
	22	16x20	0.24	345
	33	16x30	0.24	375
	47	18x30	0.24	410
	56	18x40	0.24	460

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：AU
Teapo Series：AU High Temperature、Ultra Long Life Series

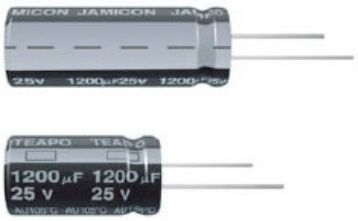


■ Endurance: 135℃ 1000~3000小時
■ Recommended Applications： Applicable for Electronic Ballast,Lighting Ballast
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +135℃
Rated Voltage Range	10~100VDC
Rated Capacitance Range	22~ 4700μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.03CV or 4(μA)whichever is greater. (After rated voltage applied for 1 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 10 / 16 / 25 / 35 / 50 / 63 / 80 / 100 tan δ: 0.20 / 0.16 / 0.14 / 0.12 / 0.10 / 0.09 / 0.14 / 0.14 When nominal capacitance is over 1000μF,tan δ shall be added 0.02 to the listed value with increase of every 1000μF.
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120Hz): 10 / 16 / 25 / 35 / 50 / 63 / 80 / 100 Z-25℃ / Z+20℃: 3 / 2 / 2 / 2 / 2 / 2 / 2 / 2 Z-40℃ / Z+20℃: 6 / 4 / 4 / 4 / 4 / 4 / 4 / 4
Endurance	After applying rated voltage with rated ripple current for 1000~3000 hours at 135℃, the capacitors shall meet the following requirements. Rated Voltage Range: 10~100VDC Capacitance change: Within ±30% of initial value D.F. (tan δ): Not more than300% of specified value Leakage current: initial specified value or less DΦ / Life(hours): 8Φ: 1000 / 10Φ: 2000 / ≥12.5Φ: 3000
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 130℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4. Rated Voltage Range: 10~100VDC Capacitance change: Within ±30% of initial value D.F. (tan δ): Not more than300% of specified value Leakage current: initial specified value or less

■ Dimensions [mm]

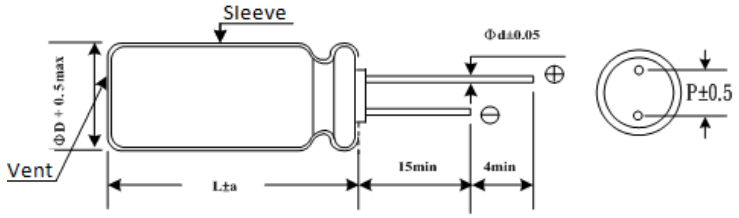

ΦD	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
a	1.5	1.5	1.5	1.5	2.0	2.0	2.0

■ Multiplier for Ripple Current

Freq. (Hz)		120	1K	10K	≥100K
10~100WV	CAP:＜100μF	0.40	0.75	0.90	1.00
	CAP:100~470μF	0.50	0.85	0.94	1.00
	CAP:＞470μF	0.60	0.87	0.95	1.00

Jamicon Series：AU


Teapo Series：AU


■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms135℃) (100KHz)
10(13)	220	8x11	0.20	340
	330	10x12	0.20	490
	470	10x15	0.20	640
	1000	10x20	0.20	1060
	2200	12.5x25	0.22	1750
	3300	16x25	0.24	2300
	4700	16x32	0.26	2710
16(20)	100	8x11	0.16	340
	220	10x12	0.16	595
	330	10x15	0.16	680
	470	10x16	0.16	945
	1000	12.5x20	0.16	1490
	2200	16x25	0.18	2300
	3300	16x32	0.20	2710
25(32)	100	8x11	0.14	500
	220	10x12	0.14	680
	330	10x16	0.14	945
	470	10x20	0.14	1100
	1000	12.5x25	0.14	1750
	2200	16x32	0.16	2710
35(44)	100	10x12	0.12	620
	220	10x16	0.12	790
	330	10x20	0.12	950
	470	12.5x20	0.12	1330
	1000	16x25	0.12	2010

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms135℃) (100KHz)
50(63)	33	8x11	0.10	300
	47	8x11	0.10	440
	100	10x12	0.10	555
	220	10x20	0.10	930
	330	12.5x20	0.10	1330
	470	12.5x25	0.10	1650
	1000	16x32	0.10	2340
63(79)	22	8x11	0.09	130
	33	8x11	0.09	150
	47	10x12	0.09	230
	100	10x16	0.09	370
	220	12.5x20	0.09	685
	330	12.5x25	0.09	925
	470	12.5x35	0.09	1280
	1000	16x32	0.09	2060
80（100）	33	8x12.5	0.08	285
	47	10x12.5	0.08	396
	100	10x20	0.08	639
	220	12.5x25	0.08	1035
	330	12.5x31.5	0.08	1251
	470	16x25	0.08	1350
	1000	18x40	0.08	2277
100（125）	33	10x12.5	0.08	290
	47	10x16	0.08	378
	100	12.5x20	0.08	567
	220	16x25	0.08	1116
	330	16x31.5	0.08	1611
	470	18x40	0.08	2286

Jamicon Series：AS
Teapo Series：AS High Temperature、Ultra Long Life Series






■ Endurance: 150℃ 1000~2000小時
■ Recommended applications: Suitable for high-temperature industries such as electronic b
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +150℃
Rated Voltage Range	10~100VDC
Rated Capacitance Range	33~ 4700μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.03CV or 4(μA)whichever is greater. (After rated voltage applied for 1 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 10 / 16 / 25 / 35 / 50 / 63 / 80 / 100 tan δ: 0.20 / 0.16 / 0.14 / 0.12 / 0.10 / 0.10 / 0.10 / 0.10 When nominal capacitance is over 1000μF,tan δ shall be added 0.02 to the listed value with increase of every 1000μF.
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120Hz): 10 / 16 / 25 / 35 / 50 / 63 / 80 / 100 Z-25℃ / Z+20℃: 3 / 2 / 2 / 2 / 2 / 2 / 2 / 2 Z-40℃ / Z+20℃: 6 / 4 / 4 / 4 / 4 / 4 / 4 / 4
Endurance	After applying rated voltage with rated ripple current for 1000~2000 hours at 150℃, the capacitors shall meet the following requirements. Rated Voltage Range: 10~100VDC Capacitance change: Within ±30% of initial value D.F. (tan δ): Not more than300% of specified value Leakage current: initial specified value or less DΦ: 10~12.5Φ / ＞12.5Φ Life(hours): 1000 / 2000
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 150℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4. Rated Voltage Range: 10~100VDC Capacitance change: Within ±30% of initial value D.F. (tan δ): Not more than300% of specified value Leakage current: initial specified value or less

■ Dimensions [mm]

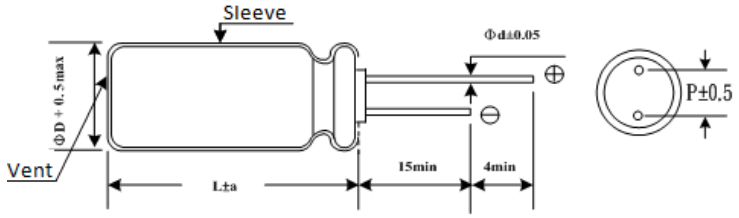

ΦD	5	6.3	8	10	13.0	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
a	1.5	1.5	1.5	1.5	2.0	2.0	2.0

■ Multiplier for Ripple Current

Freq. (Hz)	120	1K	10K	≥100K
1000＞CV	0.5	0.64	0.83	1.00
1000≤CV	0.7	0.79	0.91	1.00

Jamicon Series：AS

Teapo Series：AS


■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms135℃) (100KHz)
10(13)	330	10x12	0.20	490
	470	10x15	0.20	640
	1000	10x20	0.20	1060
	2200	12.5x25	0.24	1750
	3300	16x25	0.26	2300
	4700	16x32	0.28	2710
16(20)	220	10x12	0.16	595
	330	10x15	0.16	680
	470	10x16	0.16	945
	1000	12.5x20	0.16	1490
	2200	16x25	0.20	2300
	3300	16x32	0.22	2710
25(32)	220	10x12	0.14	680
	330	10x16	0.14	945
	470	10x20	0.14	1100
	1000	12.5x25	0.14	1750
	2200	16x32	0.18	2710
35(44)	100	10x12	0.12	620
	220	10x16	0.12	790
	330	10x20	0.12	950
	470	12.5x20	0.12	1330
	1000	16x25	0.12	2010

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms135℃) (100KHz)
50(63)	100	10x12	0.10	555
	220	10x20	0.10	930
	330	12.5x20	0.10	1330
	470	12.5x25	0.10	1650
	1000	16x32	0.10	2340
63(79)	47	10x12	0.09	230
	100	10x16	0.09	370
	220	12.5x20	0.09	685
	330	12.5x25	0.09	925
	470	12.5x35	0.09	1280
	1000	16x32	0.09	2060
80 （100）	47	10x12.5	0.08	396
	100	10x20	0.08	639
	220	12.5x25	0.08	1035
	330	12.5x31.5	0.08	1251
	470	16x25	0.08	1350
	1000	18x40	0.08	2277
100 （125）	33	10x12.5	0.08	290
	47	10x16	0.08	378
	100	12.5x20	0.08	567
	220	16x25	0.08	1116
	330	16x31.5	0.08	1611
	470	18x40	0.08	2286

Jamicon Series：NK
Teapo Series：RN

Non-polar Standard Serie

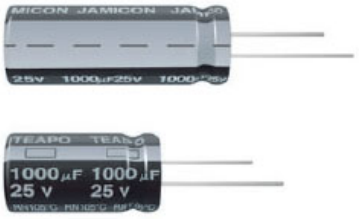


■ Endurance: 85℃,2000hours, Non-polarized/Polarity reversing
■ Recommended Applications :Small crossover network, Reversed polarity circuit, Coupling
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +85℃ -25~+85℃
Rated Voltage Range	6.3~ 100VDC 160~250VDC
Rated Capacitance Range	1 ~ 6800 μF 1~100 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I≦0.03CV+4 μA ; L=7mm,I≦0.05CV or 10 μA whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV 6.3 10 16 25 35 50 63~100 160~250 tan δ 0.24 0.2 0.17 0.15 0.15 0.15 0.12 0.20 When nominal capacitance is over 1000 μF,tan δ shall be added 0.02 to the listed value with increase of every 1000 μF.
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120Hz) 6.3 10 16 25 35 50 63~100 160~250 Z(-25℃) / Z(+20℃) 4 3 2 2 2 2 2 6 Z(-40℃) / Z(+20℃) 8 6 4 4 3 3 3 -
Endurance	After applying rated voltage with rated ripple current for2000（L≦7mm1000）hours at 85℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for500 hours at 85℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

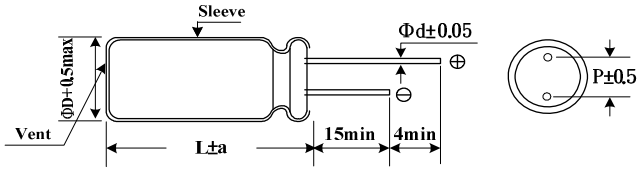

ΦD	4	5	6.3	8	10	13	16	18
P	1.5	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Φd	0.45	0.5(0.45)	0.5(0.45)	0.6	0.6	0.6	0.8	0.8
a	1.0	1.5(1.0)	1.5(1.0)	1.5	1.5	2.0	2.0	2.0

( ) : L = 7

■ Multiplier for Ripple Current

Freq. (Hz) / WV(VDC)	50	120	1K	10K
6.3 ~ 16V	0.8	1.0	1.1	1.2
25 ~35V	0.8	1.0	1.5	1.7
50 ~ 100V	0.8	1.0	1.6	1.9
160 ~ 250V	0.8	1.0	1.5	1.6

Jamicon Series：NK

Teapo Series：RN

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms85℃) (120Hz)
6.3(8)	22	5x7	0.24	45
	33	5x7	0.24	55
		5x11	0.24	70
	47	5x11	0.24	75
		6.3x7	0.24	60
	100	6.3x11	0.24	115
	220	8x11	0.24	205
	330	8x11	0.24	265
	470	10x12.5	0.24	370
	1000	10x20	0.24	650
	2200	13x25	0.26	1160
	3300	16x25	0.28	1570
	4700	16x32	0.30	2020
	6800	18x36	0.34	2600
10(13)	10	4x7	0.20	30
	22	5x7	0.20	50
		5x11	0.20	65
	33	5x11	0.20	65
		6.3x7	0.20	55
	47	5x11	0.20	75
		6.3x7	0.20	65
	100	6.3x11	0.20	125
	220	8x11	0.20	215
	330	10x16	0.20	345
	470	10x16	0.20	410
	1000	13x20	0.20	720
	2200	16x25	0.22	1280
	3300	16x32	0.24	1690
	4700	18x36	0.26	2160
16 (20)	4.7	4x7	0.17	20
	10	5x7	0.17	35
		5x11	0.17	47
	22	5x11	0.17	55
		6.3x7	0.17	47
	33	5x11	0.17	70
		6.3x7	0.17	60
	47	6.3x7	0.17	70
		6.3x11	0.17	95
	100	8x11	0.17	160
	220	10x12.5	0.17	275
	330	10x16	0.17	375
	470	10x20	0.17	485
	1000	13x25	0.17	855
	2200	16x32	0.19	1510
	3300	18x36	0.21	1980
25 (32)	3.3	4x7	0.15	15
	4.7	5x7	0.15	20
	10	5x11	0.15	40
		6.3x7	0.15	35
	22	6.3x7	0.15	50
		6.3x11	0.15	65
	33	6.3x7	0.15	65
		6.3x11	0.15	80
	47	6.3x11	0.15	95
	100	8x11	0.15	160
	220	10x16	0.15	305
	330	13x20	0.15	450
	470	13x20	0.15	540
	1000	16x25	0.15	950
	2200	18x36	0.17	1730
35 (44)	2.2	4x7	0.15	15
	3.3	5x7	0.15	20

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms85℃) (120Hz)
35 (44)	4.7	5x7	0.15	30
		5x11	0.15	38
	10	5x11	0.15	48
		6.3x7	0.15	45
	22	6.3x11	0.15	95
	33	8x11	0.15	100
	47	8x11	0.15	120
	100	10x16	0.15	230
	220	13x20	0.15	410
	330	13x20	0.15	505
	470	13x25	0.15	655
	1000	16x32	0.15	1140
50 (63)	1	4x7	0.15	10
		5x11	0.15	18
	2.2	4x7	0.15	20
		5x11	0.15	26
	3.3	5x7	0.15	25
		5x11	0.15	30
	4.7	6.3x7	0.15	30
		5x11	0.15	30
	10	6.3x11	0.15	45
	22	8x11	0.15	80
	33	8x11	0.15	105
	47	8x15	0.15	140
	100	10x20	0.15	265
	220	13x25	0.15	480
	330	16x25	0.15	650
	470	16x32	0.15	840
63 (79)	10	6.3x11	0.12	55
	22	8x11	0.12	90
	33	10x12.5	0.12	135
	47	10x16	0.12	180
	100	13x20	0.12	320
	220	16x25	0.12	575
	330	16x32	0.12	750
	470	18x36	0.12	965
80 (100)	10	8x11	0.12	65
	22	10x16	0.12	105
	33	10x16	0.12	160
	47	10x20	0.12	215
	100	13x25	0.12	385
	220	16x32	0.12	690
	330	18x36	0.12	860
100 (125)	10	8x11	0.12	70
	22	10x16	0.12	135
	33	13x20	0.12	220
	47	13x20	0.12	240
	100	16x25	0.12	425
	220	18x36	0.12	720
160 (200)	1	6.3x11	0.20	15
	2.2	8x11	0.20	20
	3.3	10x12.5	0.20	30
	4.7	10x12.5	0.20	35
	10	10x16	0.20	55
	22	13x25	0.20	105
	33	16x25	0.20	165
	47	16x26	0.20	200
	100	18x36	0.20	360
200 (250)	1	6.3x11	0.20	15
	2.2	8x11	0.20	20
	3.3	10x12.5	0.20	30
	4.7	10x16	0.20	40

Jamicon Series：NK
Teapo Series：RN


■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms85℃) (120Hz)
200 (250)	10	13x20	0.20	70
	22	13x25	0.20	120
	33	16x25	0.20	165
	47	16x32	0.20	220
250 (300)	1	8x11	0.20	15
	2.2	10x12.5	0.20	25

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms85℃) (120Hz)
250 (300)	3.3	10x12.5	0.20	30
	4.7	10x16	0.20	40
	10	13x20	0.20	70
	22	16x25	0.20	135
	33	16x32	0.20	180
	47	16x36	0.20	230

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：SN
Teapo Series：SN Non-polar Standard Series

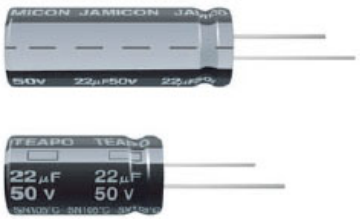

■ Endurance: 105℃ 2000 hours
■ Recommended Applications : Non-polar miniature type for used in reversing polarity DC voltage circuits
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃ -25~+105℃
Rated Voltage Range	6.3 ~ 100VDC 160~250VDC
Rated Capacitance Range	1 ~ 2200 μF 1~100 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.03CV+ 3 μA; L=7mm, I=0.06CV+ 10 μA(After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)

Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)

WV	6.3	10	16	25	35	50	63	80	100	160~250
tan δ	0.24	0.20	0.17	0.15	0.15	0.15	0.12	0.12	0.12	0.20

When nominal capacitance is over 1000uF，
tan δ shall be added 0.02 to the listed value with increase of every 1000uF;L=7mm, tan δ shall be added 0.03

Low Temperature Stability Impedance Ratio (MAX)

WV / Z(120Hz)	6.3	10	16	25	35	50	63~100	160-250
Z-25℃ / Z+20℃	4	3	2	2	2	2	2	6
Z-40℃ / Z+20℃	10	8	6	4	3	3	3	—

Endurance


After applying rated voltage with rated ripple current for2000（L≦7mm1000）hours at 105℃, the capacitors shall meet the following requirements.

Capacitance change	Within ± 25% of initial value
D.F. (tan δ)	Not more than 200% of specified value
Leakage current	Not more than the specified value

Shelf Life

The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for500 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

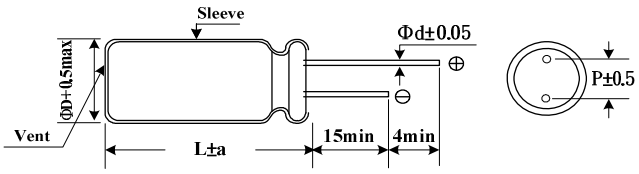

ΦD	4.0	5.0	6.3	8.0	10.0	13.0	16.0	18.0
P	1.5	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Φd	0.45	0.5	0.5	0.6	0.6	0.6	0.8	0.8
a	1.0	1.5	1.5	1.5	1.5	2.0	2.0	2.0

■ Multiplier for Ripple Current

Freq. (Hz)	60	120	300	1K	10K
Factor	0.75	1.00	1.20	1.32	1.65

Jamicon Series：SN
Teapo Series：SN

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	R.C (mA/rms105℃) (120Hz)
6.3(8)	33	5x11	0.24	63
	47	6.3x11	0.24	84
	100	8x11	0.24	140
	220	10x12.5	0.24	235
	330	10x16	0.24	310
	470	10x20	0.24	400
	1000	13x25	0.24	690
	2200	16x32	0.26	1250
10(13)	22	5x11	0.20	57
	33	6.3x11	0.20	77
	47	6.3x11	0.20	93
	100	8x11	0.20	193
	220	10x16	0.20	255
	330	10x20	0.20	380
	470	13x20	0.20	470
	1000	16x25	0.20	885
	2200	16x36	0.22	1450
16(20)	10	6.3x11	0.17	45
	22	5x11	0.17	59
		6.3x11	0.17	69
	33	8x11	0.17	98
	47	8x11	0.17	115
	100	8x11	0.17	140
		10x12.5	0.17	175
		10x16	0.17	205
	220	10x20	0.17	330
	330	13x20	0.17	445
	470	13x25	0.17	570
	1000	16x32	0.17	1020
25(32)	10	5x11	0.15	42
		6.3x11	0.15	50
	22	6.3x11	0.15	69
		8x11	0.15	86
	33	8x11	0.15	105
	47	10x12.5	0.15	140
	100	10x20	0.15	240
	220	13x20	0.15	390
	330	16x25	0.15	580
	470	16x25	0.15	690
35(44)	4.7	5x11	0.15	34
	10	6.3x11	0.15	54
	22	8x11	0.15	94
	33	10x12.5	0.15	125
	47	10x16	0.15	165
	100	13x20	0.15	285
	220	16x25	0.15	520
	330	16x25	0.15	630
	470	16x32	0.15	820
50(63)	2.2	5x11	0.15	25
	3.3	6.3x11	0.15	31
	4.7	5x11	0.15	34
		6.3x11	0.15	41
	10	6.3x11	0.15	56
		8x11	0.15	70

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	R.C (mA/rms105℃) (120Hz)
50(63)	22	6.3x11	0.15	75
		8x11	0.15	97
		10x12.5	0.15	115
	33	8x11	0.15	110
		10x16	0.15	150
	47	8x11	0.15	130
		10x20	0.15	190
	100	13x20	0.15	310
	220	16x25	0.15	570
	330	16x36	0.15	790
63(79)	10	8x11	0.12	74
	22	8x11	0.12	95
		10x16	0.12	130
	33	8x11	0.12	115
		10x20	0.12	175
	47	13x20	0.12	230
	100	16x25	0.12	410
	220	16x32	0.12	660
80(100)	10	10x12.5	0.12	88
	22	10x20	0.12	150
	33	13x20	0.12	205
	47	13x20	0.12	245
	100	16x25	0.12	435
100(125)	10	8x11	0.12	80
		10x12.5	0.12	100
	22	13x20	0.12	180
	33	13x20	0.12	220
	47	13x25	0.12	285
	100	16x32	0.12	510
160(200)	1	6.3x11	0.20	21
	2.2	8x11	0.20	34
	3.3	10x12.5	0.20	49
	4.7	10x12.5	0.20	58
	10	10x17	0.20	80
	22	13x25	0.20	180
	33	16x26	0.20	220
	47	16x26	0.20	285
	100	18x36	0.20	510
200(250)	1	6.3x11	0.20	21
	2.2	8x11	0.20	34
	3.3	10x12.5	0.20	49
	4.7	10x15	0.20	62
	10	13x20	0.20	100
	22	13x25	0.20	180
	33	16x26	0.20	220
	47	16x32	0.20	315
250(300)	1	8x11	0.20	25
	2.2	10x12.5	0.20	38
	3.3	10x12.5	0.20	49
	4.7	10x17	0.20	66
	10	13x20	0.20	100
	22	16x26	0.20	200
	33	16x32	0.20	250
	47	16x36	0.20	330

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：LK
Teapo Series：LL

Low leakage current Series






■ Endurance：85℃ 2000 hours
■ Recommended Applications :in where low leakage current is essential as in coupling of pre-amplifies
Remaining of very low leakage current even after prolonged storage
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +85℃
Rated Voltage Range	10 ~ 63VDC
Rated Capacitance Range	10 ~ 1000 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I≦0.002CV or 1.0 μA whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 10 / 16 / 25 / 35 / 50 / 63 tan δ: 0.24 / 0.20 / 0.16 / 0.14 / 0.12 / 0.10 When nominal capacitance is over 1000 μF,tan δ shall be added 0.02 to the listed value with increase of every 1000 μF.
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120Hz): 10 / 16 / 25 / 35 / 50 / 63 Z(-25℃)/ Z(+20℃): 3 / 2 / 2 / 2 / 2 / 2 Z(-40℃)/ Z(+20℃): 6 / 4 / 4 / 3 / 3 / 3
Endurance	After applying rated voltage with rated ripple current for 2000 hours at 85℃ , the capacitors shall meet the following requirements. Capacitance change: Within ± 15% of initial value D.F. (tan δ): Not more than 150% of specified value Leakage current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 85℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4. Capacitance change: Within ± 15% of initial value D.F. (tan δ): Not more than150% of specified value Leakage current: Not more than 200% of specified value

■ Dimensions [mm]

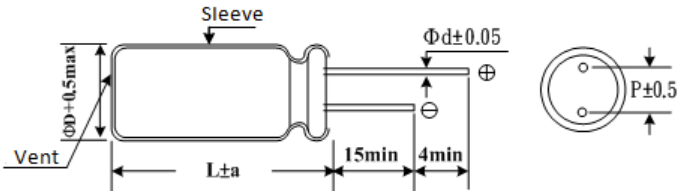

φD	5	6.3	8	10	12.5
P	2.0	2.5	3.5	5.0	5.0
φd	0.5	0.5	0.6	0.6	0.6
a	1.5	1.5	1.5	1.5	2.0

■ Multiplier for Ripple Current

Frequency (Hz)	50	120	1k	≧10k
6.3～10V	0.8	1.0	1.1	1.2
16~25V	0.8	1.0	1.2	1.3
35~50V	0.8	1.0	1.5	1.7
63~100V	0.8	1.0	1.6	1.9


Jamicon Series： LK
Teapo Series： LL

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
10V (13)	22	5x11	0.24	65
	33	6.3x11	0.24	90
	47	6.3x11	0.24	110
	100	8x11	0.24	180
	220	10x16	0.24	310
	330	10x20	0.24	420
	470	12.5x20	0.24	500
	1000	12.5x25	0.24	810
16V (20)	10	5x11	0.20	48
	22	6.3x11	0.20	80
	33	6.3x11	0.20	100
	47	8x11	0.20	140
	100	10x12.5	0.20	210
	220	10x20	0.20	390
	330	12.5x20	0.20	470
	470	12.5x20	0.20	560
25V (32)	10	6.3x11	0.16	60
	22	8x11	0.16	100
	33	8x11	0.16	130
	47	10x12.5	0.16	160

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
25V (32)	100	10x16	0.16	250
	220	12.5x20	0.16	410
	330	12.5x25	0.16	560
35V (44)	10	6.3x11	0.14	65
	22	8x11	0.14	110
	33	10x12.5	0.14	140
	47	10x12.5	0.14	170
	100	10x20	0.14	300
	220	12.5x25	0.14	490
50V (63)	10	8x11	0.12	80
	22	10x12.5	0.12	130
	33	10x16	0.12	170
	47	10x16	0.12	210
	100	12.5x20	0.12	330
63V (79)	10	8x11	0.10	80
	22	10x16	0.10	140
	33	10x16	0.10	170
	47	10x20	0.10	230
	100	12.5x25	0.10	360

Jamicon Series：SB
Teapo Series：SB Low leakage current Series

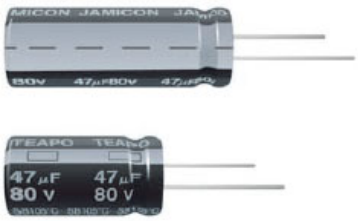


■ Endurance：105℃ 2000 hours
■ Recommended Applications :in where low leakage current is essential as in coupling of pre-amplifies
Remaining of very low leakage current even after prolonged storage
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃
Rated Voltage Range	6.3 ~ 100VDC
Rated Capacitance Range	10 ~ 15000 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I≦0.002CV or 1.0 μA whichever is greater. (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 6.3 / 10 / 16 / 25 / 35 / 50 / 63 / 80 / 100 tan δ: 0.28 / 0.24 / 0.20 / 0.16 / 0.14 / 0.12 / 0.10 / 0.10 / 0.10 When nominal capacitance is over 1000 μF,tan δ shall be added 0.02 to the listed value with increase of every 1000 μF.
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120Hz): 6.3 / 10 / 16 / 25 / 35 / 50 / 63 / 80 / 100 Z(-25℃)/ Z(+20℃): 4 / 3 / 2 / 2 / 2 / 2 / 2 / 1.5 / 1.5 Z(-40℃)/ Z(+20℃): 8 / 6 / 4 / 4 / 3 / 3 / 3 / 2 / 2
Endurance	After applying rated voltage with rated ripple current for 2000hours at 105℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for500 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: Not more than 200% of specified value

■ Dimensions [mm]

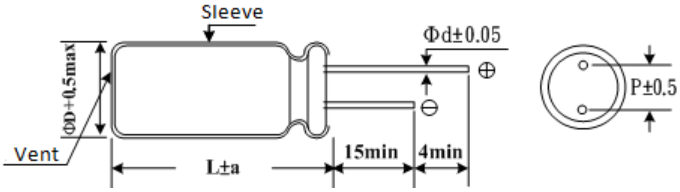

φD	5	6.3	8	10	13	16	18	22
P	2	2.5	3.5	5	5	7.5	7.5	10
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	1.0
a	1.5	1.5	1.5	1.5	2.0	2.0	2.0	2.0

■ Multiplier for Ripple Current

Freq. (Hz)	50	120	300	1K	10K
6.3 ~ 25 V	0.85	1.00	1.04	1.08	1.19
35~ 50 V	0.80	1.00	1.30	1.40	1.43
63 ~ 100 V	0.77	1.00	1.34	1.43	1.48

Jamicon Series：SB

Teapo Series：SB


■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
6.3V (8)	33	5x11	0.28	55
	47	5x11	0.28	65
	100	5x11	0.28	95
	220	6.3x11	0.28	165
	330	6.3x11	0.28	195
	470	8x11	0.28	270
	1000	10x12.5	0.28	465
	2200	13x20	0.30	925
	3300	13x20	0.32	1100
	4700	16x26	0.34	1600
	6800	16x26	0.38	1810
	10000	16x32	0.46	2210
	15000	18x36	0.56	2760
10V (13)	22	5x11	0.24	50
	33	5x11	0.24	60
	47	5x11	0.24	75
	100	5x11	0.24	110
	220	6.3x11	0.24	180
	330	8x11	0.24	250
	470	8x11	0.24	300
	1000	10x17	0.24	600
	2200	13x20	0.26	1000
	3300	13x25	0.28	1300
	4700	16x26	0.30	1700
	6800	16x32	0.34	2100
	10000	18x36	0.42	2630
16V (20)	10	5x11	0.20	40
	22	5x11	0.20	55
	33	5x11	0.20	70
	47	5x11	0.20	85
	100	6.3x11	0.20	140
	220	8x11	0.20	230
	330	8x11	0.20	280
	470	10x12.5	0.20	400
	1000	10x17	0.20	660
	2200	13x25	0.22	1210
	3300	16x26	0.24	1610
	4700	16x32	0.26	2020
	6800	18x36	0.30	2520
	10000	18x40	0.38	2910
25V (32)	10	5x11	0.16	40
	22	5x11	0.16	60
	33	5x11	0.16	75
	47	5x11	0.16	90
	100	6.3x11	0.16	140
	220	8x11	0.16	250
	330	10x12.5	0.16	360
	470	10x17	0.16	490
	1000	13x20	0.16	880
	2200	16x26	0.18	1550
	3300	16x32	0.20	1860

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
25V (32)	4700	18x36	0.22	2380
	6800	18x40	0.24	2770
35V (44)	10	5x11	0.14	45
	22	5x11	0.14	65
	33	5x11	0.14	80
	47	6.3x11	0.14	110
	100	8x11	0.14	180
	220	10x12.5	0.14	320
	330	10x17	0.14	450
	470	10x20	0.14	570
	1000	13x25	0.14	1060
	2200	16x32	0.16	1700
	3300	18x36	0.18	2200
	4700	18x40	0.20	2610
50V (63)	10	5x11	0.12	55
	22	5x11	0.12	75
	33	6.3x11	0.12	100
	47	6.3x11	0.12	120
	100	8x11	0.12	200
	220	10x17	0.12	400
	330	10x20	0.12	520
	470	13x20	0.12	730
	1000	16x26	0.12	1330
	2200	18x36	0.14	2100
63V (79)	10	5x11	0.10	50
	22	6.3x11	0.10	80
	33	6.3x11	0.10	100
	47	8x11	0.10	140
	100	10x12.5	0.10	230
	220	10x20	0.10	430
	330	13x20	0.10	610
	470	13x25	0.10	800
	1000	16x32	0.10	1460
80V (100)	10	6.3x11	0.10	60
	22	8x11	0.10	110
	33	8x11	0.10	130
	47	10x12.5	0.10	180
	100	10x17	0.10	310
	220	13x20	0.10	560
	330	13x25	0.10	750
	470	16x26	0.10	1020
	1000	18x36	0.10	1830
100V (125)	10	6.3x11	0.10	65
	22	8x11	0.10	115
	33	10x12.5	0.10	160
	47	10x17	0.10	230
	100	13x20	0.10	410
	220	16x26	0.10	750
	330	16x26	0.10	920
	470	16x32	0.10	1200

Jamicon Series：RV
Teapo Series：MA

No Spark with DC Overvoltage Series

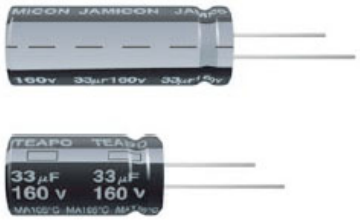


- Endurance: 105℃ 2000 hours
- Recommended Applications : AV(TV, Video, Audio); Monitor/Computer; OA/HA/ Communication; Converter/Inverter; Energy saving lamp; PFC circuit;SMPS; Ballast; Adapter
- Corresponding product to RoHS

SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-25~+105℃
Rated Voltage Range	200 ~ 400VDC
Rated Capacitance Range	2.2 ~ 220 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.06CV +10 μA (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 200 / 400 tan δ: 0.15 / 0.24
Low Temperature Stability Impedance Ratio (MAX)	WV / Z (120Hz): 200 / 400 Z(-25℃) / Z(20℃): 4 / 6
Endurance	After applying rated voltage with rated ripple current for 2000hours at 105℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

Dimensions [mm]

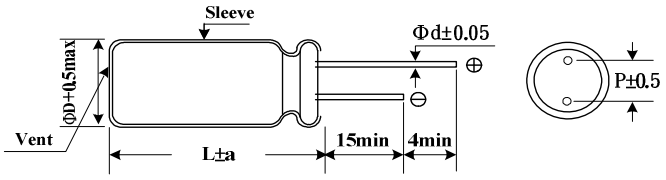

ΦD	16	18
P	7.5	7.5
Φd	0.8	0.8
a	2.0	2.0

Multiplier for Ripple Current

Freq. (Hz)		60	120	1K	10K	100K
W.V.	200V	0.80	1.00	1.30	1.40	1.60
	400V	0.75	1.00	1.50	1.75	1.85

Jamicon Series：RV

Teapo Series：MA

■STANDARD RATINGS


Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
200V (250)	100	16x25	0.15	400
	120	16x32	0.15	480
		18x25	0.15	470
	150	16x32	0.15	540
		18x25	0.15	520
	180	16x40	0.15	660
		18x32	0.15	630
	220	18x36	0.15	730
		18x40	0.15	770
400V (450)	22	16x25	0.24	170
	33	16x25	0.24	210
	39	16x25	0.24	210

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
400V (450)	39	16x32	0.24	260
		18x20	0.24	210
		18x25	0.24	250
	47	16x32	0.24	280
		18x20	0.24	230
	56	16x32	0.24	280
		16x40	0.24	340
		18x32	0.24	330
	68	18x25	0.24	320
		18x36	0.24	380
	82	18x32	0.24	330
		18x40	0.24	440

■DC OVERVOLTAGE TEST CONDITION


The vent will be operated and the capacity shall become an open circuit without burning the material when the following excess DC voltage is applied.

Rated Voltage	Current	Test DC Voltage
200 VDC	4A	300/375 VDC
400 VDC	2A	500/600 VDC

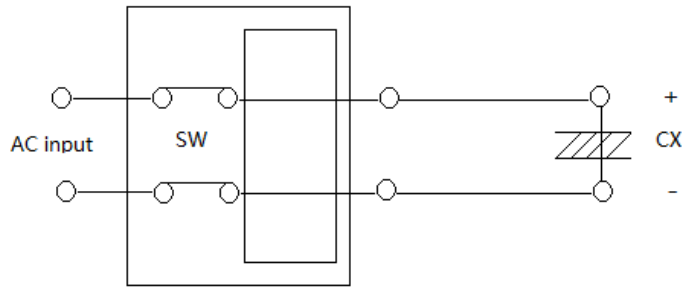

Constant DC voltage/current power supply

Jamicon Series：TP
Teapo Series：TP Low impedance、Long life Series

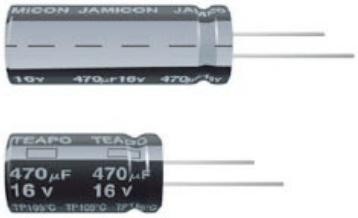


■ Endurance: 105℃ 6000~20000 hours
■ Recommended Applications : Non-polar miniature type for used in reversing polarity DC voltage circuits
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-55~ +105℃
Rated Voltage Range	10 ~35VDC
Rated Capacitance Range	1 ~4700 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I=0.01CV +3 μA (After rated voltage applied for 2 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (100KHz ,20℃)	WV: 10 / 16 / 25 / 35 tan δ: 0.2 / 0.16 / 0.14 / 0.12 When nominal capacitance is over 1000uF， tan δ shall be added 0.02 to the listed value with increase of every 1000uF;L=7mm, tan δ shall be added 0.03
Low Temperature Stability Impedance Ratio (MAX)	WV / Z(120Hz): 10 / 16 / 25 / 35 Z-25℃ / Z+20℃: 3 / 2 / 2 / 2 Z-55℃ / Z+20℃: 4 / 4 / 4 / 4
Endurance	After applying rated voltage for6000 hours（≥12.5 φ 10000，≥16 φ 20000） hours at 105℃ the capacitors shall meet the following requirements. Capacitance change: Within ± 30% of initial value D.F. (tan δ): Not more than 300% of specified value Leakage current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

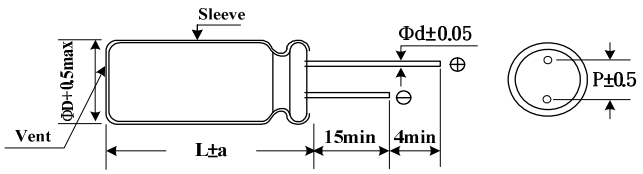

ΦD	10	13	16	18
P	5.0	5.0	7.5	7.5
Φd	0.6	0.6	0.8	0.8
a	1.5	2.0	2.0	2.0

■ Multiplier for Ripple Current

Freq. (Hz)	120	1k	10k	100k
Factor	0.75	0.80	0.90	1.00

Jamicon Series：TP


Teapo Series：TP

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	R.C (mA/rms105℃) (100KHz)
10V (13)	330	10x16	0.20	510
	470	10x20	0.20	680
	1000	12.5x25	0.20	1050
	2200	16x32	0.22	1740
	3300	18x36	0.24	2050
	4700	18x40	0.26	2290
16V (20)	220	10x16	0.16	520
	330	10x20	0.16	680
	470	12.5x20	0.16	1000
	1000	16x25	0.16	1410
	2200	18x36	0.18	2120
	3300	18x40	0.20	2160
25V (33)	100	10x12.5	0.14	420
	220	12.5x20	0.14	860
	330	12.5x25	0.14	1170

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	R.C (mA/rms105℃) (100KHz)
25V (33)	470	16x25	0.14	1500
	1000	16x32	0.14	1640
35V (44)	1	10x12.5	0.12	60
	2.2	10x12.5	0.12	90
	3.3	10x12.5	0.12	110
	4.7	10x12.5	0.12	140
	10	10x12.5	0.12	300
	22	10x12.5	0.12	350
	33	10x12.5	0.12	380
	47	10x12.5	0.12	420
	100	10x20	0.12	670
	220	12.5x25	0.12	1080
	330	16x25	0.12	1330
	470	16x32	0.12	1690
	1000	18x40	0.12	2170

Jamicon Series：TW
Teapo Series：TE LED Lighting、Ultra Long Life Series

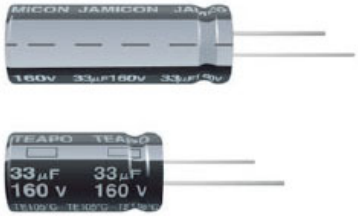


■ Endurance：105℃ 12000~20000hrs
■ Recommended Applications : For LED Lightingr
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃
Rated Voltage Range	160~400VDC
Rated Capacitance Range	1.0 ~ 33 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	CV≦1000: I=0.1CV +40 μA (1 minute); CV>1000: I=0.04CV +100 μA (1minute); I=0.03CV +15 μA (5 minute); I=0.02CV +25 μA (5minute). I：Max. leakage current (μA) C : Nominal capacitance (μF) V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 160 / 200 / 400; tan δ: 0.24 / 0.24 / 0.24
Low Temperature Stability Impedance Ratio (MAX)	WV: 160 / 200 / 400; Z-25℃ / Z+20℃: 3 / 3 / 6; Z-40℃ / Z+20℃: 8 / 8 / 10
Endurance	After applying rated voltage with rated ripple current for 12000~20000hours at 105℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 30% of initial value; D.F. (tan δ): Not more than 300% of specified value; Leakage current: initial specified value or less. ΦD×L / Life time (hours): 6.3x11,8x9,10x9 / 12000; 8x11,10x12.5 / 15000; 10x16 / 20000
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

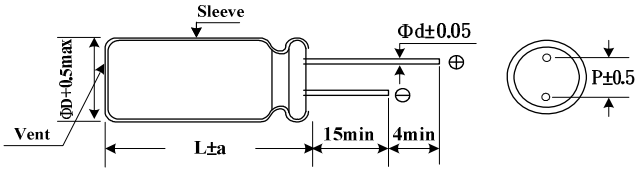

ΦD	6.3	8.0	10.0
P	2.5	3.5	5.0
Φd	0.5	0.6	0.6
a	2.0	2.0	2.0

■ Multiplier for Ripple Current

Freq. (Hz)		120	1K	10K	100K
coefficient	1~5.6 μF	1.0	1.6	1.8	2.0
	6.8~18 μF	1.0	1.5	1.7	1.9
	22~33 μF	1.0	1.4	1.6	1.8

Jamicon Series：TW

Teapo Series：TE

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
160	5.6	6.3x11	0.24	52
	10	8x9	0.24	70
	15	8x11	0.24	92
		10x9	0.24	95
	22	10x12.5	0.24	121
	33	10x16	0.24	158
200	2.2	6.3x11	0.24	36
	3.3	6.3x11	0.24	42
	4.7	6.3x11	0.24	49
	5.6	8x9	0.24	56
	6.8	8x9	0.24	62
	8.2	8x9	0.24	66
	10	8x11	0.24	80
	12	10x9	0.24	88

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (mA/rms105℃) (120Hz)
200	18	10x12.5	0.24	113
	27	10x16	0.24	149
400	1.0	6.3x11	0.24	24
	1.2	8x9	0.24	28
	1.5	8x9	0.24	30
	1.8	8x9	0.24	33
	2.2	8x9	0.24	36
		8x11	0.24	40
	2.7	8x11	0.24	43
	3.3	8x11	0.24	47
		10x9	0.24	48
	3.9	10x12.5	0.24	57
	4.7	10x12.5	0.24	61
	6.8	10x16	0.24	85

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

JAMICON Snap-in Type Aluminium Electrolytic Capacitors TEAPO

Jamicon Series：LS
Teapo Series：LH Standard Series

600V LINEUP



■ Endurance: 85℃ 2000hours
■ Recommended Applications : Applying to switching power supply and other industry/ commercial field
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40~+85℃ -40~+85℃ -25~+85℃
Rated Voltage Range	6.3 ~ 100VDC 160 ~ 500VDC DC＞500V
Rated Capacitance Range	820 ~ 120000μF 47 ~ 2700μF 100~330μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	DC≤500V I=$\sqrt{3}$ CV DC＞500V I=0.02CV . (After rated voltage applied for 5minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)

Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)

WV	6.3	10	16		25		35		50		63		80		100		160~400	420~450	500~600
Cap.	-	-	≤4700	＞4700	≤3900	＞3900	≤2700	＞2700	≤3300	＞3300	≤6800	＞6800	≤8200	＞8200	≤2200	＞2200	≤2700	＞2700	≤3300	＞3300	-	-	-
tan δ	0.60	0.55	0.5	0.6	0.4	0.5	0.35	0.4	0.3	0.35	0.25	0.35	0.20	0.25	0.20	0.25	0.15	0.20	0.25

Low Temperature Stability Impedance Ratio (MAX)

Measurement frequency : 120Hz

WV	6.3~16	25	35	50~63	80~100	160~400	420~450	500~600
Z-25℃ / Z+20℃	3	3	3	2	2	4	8	8
Z-40℃ / Z+20℃	12	10	8	6	5	—	—	—

Endurance


After applying rated voltage with rated Ripple current for 2000hrs at 85℃,when the capacitors are restored to 20℃, the capacitor shall meet the following requirements.

Capacitance change	Within ± 20% of initial value
D.F. (tan δ)	Not more than 200% of specified value
Leakage current	initial specified value or less

Shelf Life

The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 85℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

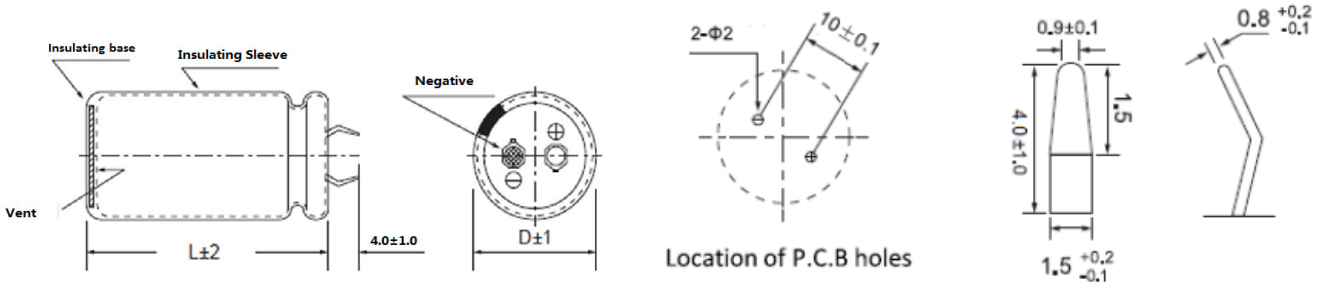

※When the code 11~12 of part number is S1, the terminal length of standard capacitor is 4.0±1.0mm, and when it is SA, the terminal length of standard capacitor is 5.8±1.0mm.

■ Multiplier for Ripple Current

頻率 (Hz)	50	60	120	1K	10K~100K
6.3~100V	0.88	0.90	1.00	1.20	1.20
160~250V	0.75	0.78	1.00	1.30	1.50
350~450V	0.74	0.76	1.00	1.35	1.45
500~550V	0.72	0.74	1.00	1.30	1.40

Jamicon Series：LS
Teapo Series：LH

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms85℃) (120Hz)
6.3 (8)	15000	22x25	0.60	2.44
	18000	22x30	0.60	2.60
		25x25	0.60	2.62
	22000	22x30	0.60	3.06
		25x25	0.60	3.07
	27000	22x35	0.60	3.49
		25x30	0.60	3.52
		30x25	0.60	3.57
	33000	22x40	0.60	3.97
		25x35	0.60	4.02
		30x30	0.60	4.05
		35x25	0.60	4.10
	39000	22x50	0.60	4.56
		25x40	0.60	4.50
		30x30	0.60	4.46
		35x25	0.60	4.51
	47000	25x45	0.60	5.09
		30x35	0.60	5.06
		35x30	0.60	5.03
	56000	25x50	0.60	5.71
		30x40	0.60	5.70
		35x30	0.60	5.75
	68000	30x45	0.60	6.48
		35x35	0.60	6.42
	82000	30x50	0.60	7.32
		35x40	0.60	7.29
	100000	35x45	0.60	8.31
	120000	35x50	0.60	8.60
10 (13)	12000	22x25	0.55	2.40
	15000	22x30	0.55	2.75
		25x25	0.55	2.75
	18000	22x35	0.55	3.15
		25x25	0.55	3.05
	22000	22x40	0.55	3.55
		25x30	0.55	3.50
		30x25	0.55	3.55
	27000	22x45	0.55	4.05
		25x35	0.55	4.00
		30x30	0.55	4.05
	33000	22x50	0.55	4.60
		25x40	0.55	4.55
		30x30	0.55	4.50
		35x25	0.55	4.50
	39000	25x45	0.55	5.10
		30x35	0.55	5.05
		35x30	0.55	5.05
	47000	25x50	0.55	5.75
		30x40	0.55	5.70
		35x30	0.55	5.65
	56000	30x45	0.55	6.45
		35x35	0.55	6.40
	68000	30x50	0.55	7.05
		35x40	0.55	7.10
	82000	35x50	0.55	7.50
16 (20)	8200	22x25	0.50	2.60
	10000	22x30	0.50	2.81
		25x25	0.50	2.75
	12000	22x30	0.50	2.90
		25x25	0.50	2.95
	15000	22x35	0.50	3.30
		25x30	0.50	3.45
		30x25	0.50	3.50

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms85℃) (120Hz)
16 (20)	18000	22x40	0.50	3.70
		25x35	0.50	3.75
		30x30	0.50	3.80
	22000	22x50	0.50	4.35
		25x40	0.50	4.30
		30x30	0.50	4.25
		35x25	0.50	4.20
	27000	25x45	0.50	4.70
		30x35	0.50	4.65
		35x30	0.50	4.65
	33000	30x40	0.50	5.35
		35x30	0.50	5.40
	39000	30x45	0.50	6.00
		35x35	0.50	5.95
	47000	30x50	0.50	6.80
		35x40	0.50	6.75
	56000	35x45	0.60	7.60
	68000	35x50	0.60	8.00
	82000	35x60	0.60	8.50
25 (32)	5600	22x25	0.40	2.20
	6800	22x30	0.40	2.69
		25x25	0.40	2.56
	8200	22x35	0.40	2.70
		25x25	0.40	2.75
	10000	22x40	0.40	3.10
		25x30	0.40	3.15
		30x25	0.40	3.20
	12000	22x45	0.40	3.50
		25x35	0.40	3.45
		30x30	0.40	3.50
		35x25	0.40	3.55
	15000	22x50	0.40	4.00
		25x40	0.40	3.95
		30x35	0.40	4.00
		35x30	0.40	4.05
	18000	25x45	0.40	4.45
		30x35	0.40	4.45
		35x30	0.40	4.60
	22000	30x40	0.40	5.20
		35x35	0.40	5.15
		30x45	0.40	5.95
		35x40	0.40	5.90
	27000	30x50	0.40	6.70
		35x45	0.40	6.75
	33000	35x50	0.40	7.55
	39000	35x45	0.40	7.56
	47000	35x50	0.50	8.30
35 (44)	3900	22x25	0.35	2.20
	4700	22x30	0.35	2.41
		25x25	0.35	2.40
	5600	22x35	0.35	2.75
		25x25	0.35	2.75
	6800	22x40	0.35	2.85
		25x30	0.35	2.85
		30x25	0.35	2.90
	8200	22x45	0.35	3.15
		25x35	0.35	3.10
		30x30	0.35	3.15
	10000	22x50	0.35	3.55
		25x40	0.35	3.50
		30x30	0.35	3.45
		35x25	0.35	3.40

Jamicon Series：LS
Teapo Series：LH

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms85℃) (120Hz)
35(44)	12000	25x45	0.35	3.95
		30x35	0.35	4.00
		35x30	0.35	4.05
	15000	25x50	0.35	4.95
		30x40	0.35	4.95
		35x35	0.35	5.00
	18000	30x45	0.35	5.50
		35x40	0.35	5.55
	22000	30x50	0.35	6.00
		35x45	0.35	6.05
	27000	35x50	0.35	6.90
50 (63)	2200	22x25	0.30	1.93
	2700	22x30	0.30	2.10
		25x25	0.30	2.20
	3300	22x30	0.30	2.35
		25x25	0.30	2.35
	3900	22x35	0.30	2.65
		25x30	0.30	2.65
		30x25	0.30	2.65
	4700	22x40	0.30	3.00
		25x35	0.30	3.00
		30x25	0.30	2.95
	5600	22x45	0.30	3.35
		25x40	0.30	3.35
		30x30	0.30	3.35
		35x25	0.30	3.40
	6800	22x50	0.30	3.80
		25x40	0.30	3.80
		30x30	0.30	3.80
		30x35	0.30	3.85
		35x30	0.30	3.85
	8200	25x50	0.35	4.35
		30x40	0.35	4.35
		35x30	0.35	4.40
	10000	30x45	0.35	5.00
		35x35	0.35	4.95
	12000	30x50	0.35	5.60
		35x40	0.35	5.55
	15000	35x45	0.35	6.45
	18000	35x50	0.35	6.70
63 (79)	1800	22x25	0.25	1.85
	2200	22x30	0.25	2.30
		25x25	0.25	2.30
	2700	22x35	0.25	2.45
		25x30	0.25	2.45
		30x25	0.25	2.50
	3300	22x40	0.25	2.60
		25x30	0.25	2.65
		30x25	0.25	2.70
	3900	22x45	0.25	2.95
		25x35	0.25	2.95
		30x30	0.25	3.00
	4700	22x50	0.25	3.40
		25x40	0.25	3.35
		30x30	0.25	3.35
		35x25	0.25	3.40
	5600	25x45	0.25	3.70
		30x35	0.25	3.75
		35x30	0.25	3.75
	6800	30x40	0.25	4.25
		35x30	0.25	4.20
	8200	30x45	0.35	4.80

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms85℃) (120Hz)
63(79)	8200	35x35	0.35	4.80
	10000	30x50	0.35	5.50
		35x40	0.35	5.45
	12000	35x45	0.35	6.20
80 (100)	1200	22x25	0.20	1.65
	1500	22x30	0.20	1.90
		25x25	0.20	1.90
	1800	22x35	0.20	2.20
		25x30	0.20	2.20
		30x25	0.20	2.20
	2200	22x40	0.20	2.45
		25x30	0.20	2.45
		30x25	0.20	2.50
	2700	22x45	0.25	2.80
		25x35	0.25	2.80
		30x30	0.25	2.85
		35x25	0.25	2.85
	3300	22x50	0.25	3.15
		25x40	0.25	3.20
		30x30	0.25	3.20
		35x25	0.25	3.20
	3900	25x45	0.25	3.60
		30x35	0.25	3.60
		35x30	0.25	3.60
	4700	25x50	0.25	4.05
		30x40	0.25	4.05
		35x35	0.25	4.10
	5600	30x45	0.25	4.55
		35x35	0.25	4.50
	6800	30x50	0.25	5.15
		35x40	0.25	5.15
	8200	35x45	0.25	5.85
	10000	35x50	0.25	6.60
100 (125)	820	22x25	0.20	1.85
	1000	22x30	0.20	2.10
		25x25	0.20	2.10
	1200	22x35	0.20	2.40
		25x30	0.20	2.45
	1500	22x40	0.20	2.70
		25x30	0.20	2.75
		30x25	0.20	2.75
	1800	22x45	0.20	3.10
		25x35	0.20	3.15
		30x30	0.20	3.15
		35x25	0.20	3.15
	2200	22x50	0.20	3.50
		25x40	0.20	3.55
		30x30	0.20	3.55
		35x25	0.20	3.60
	2700	25x45	0.20	4.10
		30x35	0.20	4.05
		35x30	0.20	4.05
	3300	25x50	0.20	4.50
		30x40	0.20	4.55
		35x30	0.20	4.50
	3900	30x45	0.25	5.15
		35x35	0.25	5.10
	4700	35x40	0.25	5.75
	5600	35x50	0.25	6.20
160 (200)	270	22x25	0.15	1.15
	330	22x25	0.15	1.40
		25x20	0.15	1.35

Jamicon Series：LS
Teapo Series：LH

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms85℃) (120Hz)
160(200)	390	22x30	0.15	1.55
		25x25	0.15	1.55
		30x25	0.15	1.65
	470	22x30	0.15	1.75
		25x25	0.15	1.75
		30x25	0.15	1.85
	560	22x30	0.15	1.95
		25x30	0.15	2.10
		30x25	0.15	2.10
	680	22x40	0.15	2.32
		25x30	0.15	2.21
		30x25	0.15	2.29
	820	22x45	0.15	2.68
		25x35	0.15	2.58
		30x30	0.15	2.70
		35x25	0.15	2.50
	1000	22x50	0.15	3.11
		25x40	0.15	3.00
		30x35	0.15	2.80
		35x25	0.15	3.02
	1200	25x45	0.15	3.49
		30x35	0.15	3.48
		35x30	0.15	3.59
	1500	30x45	0.15	3.75
		35x30	0.15	3.70
		35x35	0.15	4.26
	1800	30x50	0.15	4.20
		35x40	0.15	4.20
	2200	35x40	0.15	4.60
		35x45	0.15	4.80
	2700	35x50	0.15	5.45
180 (225)	180	22x20	0.15	1.00
	220	22x25	0.15	1.10
	270	22x25	0.15	1.25
		25x20	0.15	1.25
	330	22x25	0.15	1.40
		22x30	0.15	1.40
		25x25	0.15	1.40
	390	22x30	0.15	1.60
		25x25	0.15	1.60
	470	22x35	0.15	1.80
		25x30	0.15	1.80
		30x25	0.15	1.80
	560	22x35	0.15	2.00
		22x40	0.15	2.00
		25x30	0.15	1.99
		30x25	0.15	2.06
	680	22x45	0.15	2.25
		25x35	0.15	2.34
		30x30	0.15	2.20
		35x25	0.15	2.20
	820	22x50	0.15	2.55
		25x40	0.15	2.72
		30x30	0.15	2.68
		30x35	0.15	2.60
		35x25	0.15	2.75
	1000	25x45	0.15	3.16
		30x35	0.15	3.15
		35x30	0.15	2.90
	1200	30x40	0.15	3.65
		35x30	0.15	3.56
		35x35	0.15	3.30

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms85℃) (120Hz)
180 (225)	1500	30x45	0.15	4.15
		35x35	0.15	4.09
		35x40	0.15	3.80
	1800	35x40	0.15	4.73
		35x45	0.15	4.30
	2200	35x45	0.15	4.90
		35x50	0.15	4.90
200 (250)	180	22x25	0.15	1.30
	220	22x25	0.15	1.43
	270	22x25	0.15	1.67
		22x30	0.15	1.75
		25x25	0.15	1.75
	330	22x25	0.15	1.60
		22x30	0.15	1.66
		25x25	0.15	1.66
	390	22x30	0.15	1.80
		25x25	0.15	1.80
	470	22x35	0.15	2.11
		25x30	0.15	2.13
		30x25	0.15	2.21
	560	22x40	0.15	2.44
		25x35	0.15	2.48
		30x25	0.15	2.41
	680	22x45	0.15	2.83
		25x35	0.15	2.73
		30x30	0.15	2.85
		35x25	0.15	2.92
	820	25x40	0.15	3.17
		25x45	0.15	3.25
		30x30	0.15	3.13
		30x35	0.15	3.22
		35x30	0.15	3.40
	1000	25x45	0.15	3.55
		25x50	0.15	3.87
		30x35	0.15	3.68
		30x40	0.15	3.82
		35x30	0.15	3.80
	1200	25x50	0.15	4.05
		30x40	0.15	4.26
		30x45	0.15	4.46
		35x30	0.15	4.17
		35x35	0.15	4.42
	1500	30x45	0.15	4.50
		30x50	0.15	4.55
		35x35	0.15	4.52
		35x40	0.15	5.02
	1800	35x40	0.15	5.30
		35x45	0.15	5.45
	2200	35x45	0.15	5.60
		35x50	0.15	5.65
250 (300)	120	22x20	0.15	1.00
	150	22x25	0.15	1.03
	180	22x25	0.15	1.13
		25x20	0.15	1.10
	220	22x25	0.15	1.31
		22x35	0.15	1.45
		25x25	0.15	1.45
	270	22x30	0.15	1.57
		25x25	0.15	1.57
	330	22x30	0.15	1.65
		25x25	0.15	1.80
		30x25	0.15	1.86

Jamicon Series：LS
Teapo Series：LH

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms85℃) (120Hz)
250 (300)	390	22x35	0.15	2.01
		25x30	0.15	2.03
		30x25	0.15	2.10
	470	22x40	0.15	2.34
		25x35	0.15	2.38
		30x25	0.15	2.31
		35x25	0.15	2.54
	560	22x45	0.15	2.56
		25x40	0.15	2.74
		30x30	0.15	2.71
		35x25	0.15	2.78
	680	25x45	0.15	3.19
		30x35	0.15	3.18
		35x25	0.15	2.95
	820	30x40	0.15	3.69
		35x30	0.15	3.60
	1000	30x45	0.15	4.28
		35x35	0.15	4.22
	1200	35x40	0.15	4.88
	1500	35x45	0.15	5.20
350 (400)	68	22x20	0.15	0.55
	82	22x25	0.15	0.65
		25x20	0.15	0.65
	100	22x30	0.15	0.90
		25x20	0.15	0.90
	120	22x30	0.15	1.00
		25x25	0.15	1.00
	150	22x35	0.15	1.15
		25x30	0.15	1.15
		30x25	0.15	1.15
	180	22x40	0.15	1.30
		25x30	0.15	1.25
		30x25	0.15	1.25
	220	22x45	0.15	1.45
		25x35	0.15	1.45
		30x30	0.15	1.45
		35x25	0.15	1.45
	270	25x40	0.15	1.65
		30x35	0.15	1.65
		35x25	0.15	1.65
	330	25x45	0.15	1.82
		30x35	0.15	1.82
		35x30	0.15	1.88
	390	30x40	0.15	2.10
		35x30	0.15	2.04
	470	30x40	0.15	2.30
		35x35	0.15	2.38
	560	35x40	0.15	2.75
	680	35x45	0.15	3.18
400 (450)	56	22x20	0.15	0.55
	68	22x25	0.15	0.60
		25x20	0.15	0.60
	82	22x25	0.15	0.80
		25x20	0.15	0.80
	100	22x25	0.15	0.85
		22x30	0.15	0.90
		25x25	0.15	0.91
	120	22x30	0.15	1.00
		22x35	0.15	1.05
		25x25	0.15	1.05
	150	22x35	0.15	1.19
		25x30	0.15	1.20

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms85℃) (120Hz)
400 (450)	150	30x25	0.15	1.25
	180	22x40	0.15	1.38
		22x45	0.15	1.43
		25x35	0.15	1.40
		30x30	0.15	1.42
	220	22x50	0.15	1.69
		25x40	0.15	1.64
		30x30	0.15	1.62
		35x25	0.15	1.66
	270	22x50	0.15	1.78
		25x40	0.15	1.73
		30x35	0.15	1.91
		35x30	0.15	1.97
	330	25x45	0.15	2.10
		25x50	0.15	2.22
		30x40	0.15	2.23
		35x30	0.15	2.18
	390	30x40	0.15	2.50
		30x45	0.15	2.55
		35x35	0.15	2.52
	470	30x45	0.15	2.80
		30x50	0.15	2.90
		35x40	0.15	2.92
	560	30x50	0.15	3.30
		35x45	0.15	3.34
	680	35x50	0.15	3.85
420（470）	120	22x30	0.20	0.95
	150	22x35	0.20	1.05
		25x30	0.20	1.05
		30x25	0.20	1.05
	180	22x40	0.20	1.35
	220	22x45	0.20	1.40
		22x50	0.20	1.55
		25x40	0.20	1.50
		25x45	0.20	1.60
	270	25x40	0.20	1.50
		30x40	0.20	1.60
	330	25x45	0.20	1.75
		25x50	0.20	1.85
		30x40	0.20	1.75
		30x45	0.20	1.90
	390	30x45	0.20	1.90
	470	30x45	0.20	2.10
		30x50	0.20	2.20
	560	30x50	0.20	2.30
		35x45	0.20	2.30
450 (500)	47	22x25	0.20	0.50
	56	22x25	0.20	0.65
	68	22x25	0.20	0.67
		22x30	0.20	0.70
		25x25	0.20	0.70
	82	22x30	0.20	0.83
		25x25	0.20	0.83
	100	22x30	0.20	0.93
		22x35	0.20	0.97
		25x30	0.20	0.98
		30x25	0.20	1.02
	120	22x30	0.20	0.98
		22x40	0.20	1.13
		25x30	0.20	1.08
		30x25	0.20	1.12
	150	22x35	0.20	1.13

Jamicon Series：LS
Teapo Series：LH

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms85℃) (120Hz)
450 (500)	150	22x45	0.20	1.33
		25x35	0.20	1.28
		30x30	0.20	1.34
	180	25x40	0.20	1.49
		30x30	0.20	1.47
		35x25	0.20	1.50
	220	22x45	0.20	1.58
		25x45	0.20	1.73
		30x35	0.20	1.72
		35x30	0.20	1.78
	270	25x50	0.20	2.05
		30x40	0.20	2.02
		35x35	0.20	2.10
	330	30x40	0.20	2.12
		30x45	0.20	2.35
		35x35	0.20	2.32
	390	30x45	0.20	2.45
		35x40	0.20	2.66
	470	30x45	0.20	3.07
		35x50	0.20	3.20
	560	35x50	0.20	3.36
	680	35x60	0.20	3.45
500(550)	100	22x40	0.20	1.00
		30x25	0.20	0.90
	120	30x30	0.20	1.00
		35x25	0.20	1.00
	150	22x50	0.20	1.40
		30x35	0.20	1.20
	180	30x40	0.20	1.40
		35x30	0.20	1.33
	220	30x45	0.20	1.60
		35x35	0.20	1.57

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms85℃) (120Hz)
500(550)	270	30x50	0.20	1.84
		35x40	0.20	1.75
	330	35x45	0.20	2.13
	390	35x50	0.20	2.42
550(600)	100	22x45	0.25	1.05
		30x30	0.25	1.05
	120	30x35	0.25	1.25
		35x30	0.25	1.25
	150	30x40	0.25	1.45
		35x30	0.25	1.45
	180	30x45	0.25	1.65
		35x35	0.25	1.65
	220	30x50	0.25	1.90
		35x40	0.25	1.90
	270	35x45	0.25	2.25
	330	35x50	0.25	2.60
600(650)	68	25x35	0.25	0.77
	82	30x30	0.25	0.92
	100	25x40	0.25	1.00
	100	30x35	0.25	1.10
	100	35x25	0.25	1.20
	120	30x35	0.25	1.18
	120	35x30	0.25	1.30
	150	30x45	0.25	1.47
	150	35x35	0.25	1.52
	180	35x40	0.25	1.71
	220	30x55	0.25	1.95
	220	35x45	0.25	1.95
	270	35x50	0.25	2.25
	330	35x60	0.25	2.32

Jamicon Series：HS
Teapo Series：LG

Standard Series

600V LINE UP



■ Endurance: 105℃ 2000 hours
■ Recommended Applications : Applying to switching power supply and other indu High temperature
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃ -40~ +105℃ -25~ +105℃
Rated Voltage Range	6.3 ~ 100VDC 160 ~ 500VDC DC＞500V
Rated Capacitance Range	560 ~ 82000 μF 47 ~ 2200 μF 47 ~390 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	DC≤500V I = $\sqrt{}$ CV DC＞500V I=0.02CVor 3mA whichever is greater (After rated voltage applied for 5minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)

Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)

WV	6.3	10	16		25		35		50		63		80		100		160~400	420~450	500~600
capacitance	-	-	≤33000	≥39000	≤33000	≥47000	≤22000	≥27000	≤6800	≥8200	≤6800	≥8200	≤3300	≥4700	≤3300	≥3900	-	-	-
tan δ	0.60	0.6	0.5	0.6	0.4	0.5	0.35	0.4	0.3	0.35	0.25	0.35	0.20	0.25	0.20	0.25	0.15	0.20	0.25

Low Temperature Stability Impedance Ratio (MAX)

Measurement frequency : 120Hz

Rated voltage(V)	6.3~16	25	35	50~63	80~100	160~400	420~450	500~600
Z-25℃ / Z+20℃	4	3	3	2	2	4	8	8
Z-40℃ / Z+20℃	15	10	8	6	5	-	—	—

Endurance


After applying rated voltage with rated Ripple current for 2000hrs at 105℃,when the capacitors are restored to 20℃, the capacitor shall meet the following requirements.

Capacitance change	Within ± 20% of initial value
D.F. (tan δ)	Not more than 200% of specified valu
Leakage current	initial specified value or less

Shelf Life

The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

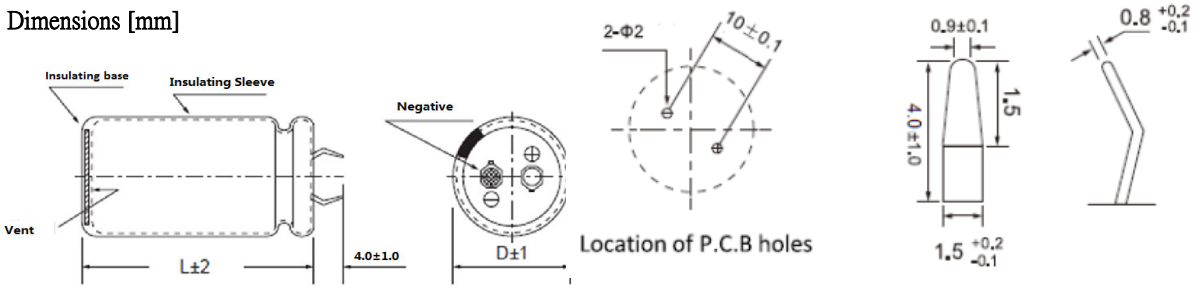

"※When the code 11~12 of part number is S1, the terminal length of standard capacitor is 4.0±1.0mm, and when it is SA, the terminal length of standard capacitor is 5.8±1.0mm."

■ Multiplier for Ripple Current

Freq. (Hz)	50	60	120	1K	10K~100K
6.3~100V	0.88	0.90	1.00	1.20	1.30
160~250V	0.85	0.88	1.00	1.30	1.50
315~450V	0.88	0.90	1.00	1.35	1.45
500~550V	0.70	0.72	1.00	1.30	1.40

Jamicon Series：HS
Teapo Series：LG

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
6.3 (8)	12000	22x25	0.60	1.55
	15000	22x30	0.60	1.70
		25x25	0.60	1.70
	18000	22x30	0.60	1.95
		25x25	0.60	1.95
	22000	22x35	0.60	2.25
		25x30	0.60	2.25
		30x25	0.60	2.25
	27000	22x40	0.60	2.55
		25x35	0.60	2.55
		30x30	0.60	2.55
		35x25	0.60	2.55
	33000	22x45	0.60	2.90
		25x40	0.60	2.95
		30x30	0.60	2.90
		35x25	0.60	2.95
	39000	25x50	0.60	3.25
		30x35	0.60	3.25
		35x30	0.60	3.30
	47000	25x50	0.60	3.70
		30x40	0.60	3.70
	56000	30x45	0.60	4.15
		35x35	0.60	4.10
	68000	30x50	0.60	4.70
		35x40	0.60	4.70
	82000	35x45	0.60	5.30
10 (13)	10000	25x25	0.55	1.55
	12000	22x30	0.55	1.75
	15000	22x30	0.55	1.90
		25x25	0.55	1.90
	18000	22x35	0.55	2.20
		25x30	0.55	2.25
	22000	22x40	0.55	2.50
		25x35	0.55	2.55
		30x25	0.55	2.45
	27000	22x50	0.55	2.95
		25x40	0.55	2.90
		30x30	0.55	2.85
		35x25	0.55	2.80
	33000	25x45	0.55	3.30
		30x35	0.55	3.30
		35x30	0.55	3.30
	39000	25x50	0.55	3.70
		30x40	0.55	3.7
		35x30	0.55	3.65
	47000	30x45	0.55	4.20
		35x35	0.55	3.80
	56000	30x50	0.55	4.65
		35x40	0.55	4.65
	68000	35x50	0.55	5.50
16 (20)	6800	22x25	0.5	1.55
	8200	22x30	0.5	1.70
		25x25	0.5	1.70
	10000	22x30	0.5	1.95
		25x25	0.5	1.95
	12000	22x35	0.5	2.20
		25x30	0.5	2.25
		30x25	0.5	2.30
	15000	22x40	0.5	2.55
		25x35	0.5	2.60
		30x30	0.5	2.60
		35x25	0.5	2.65

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
16 (20)	18000	22x45	0.50	2.90
		25x40	0.50	2.90
		30x30	0.50	2.90
		35x25	0.50	2.95
	22000	25x45	0.50	3.30
		30x35	0.50	3.30
		35x30	0.50	3.30
	27000	25x50	0.50	3.80
		30x40	0.50	3.75
		35x30	0.50	3.75
	33000	30x45	0.50	4.30
		35x35	0.50	4.25
	39000	30x50	0.60	4.80
		35x40	0.60	4.80
	47000	35x45	0.60	5.45
	56000	35x45	0.60	5.65
	68000	35x50	0.60	6.20
25 (32)	4700	22x25	0.40	1.50
	5600	22x30	0.40	1.65
		25x25	0.40	1.65
	6800	22x30	0.40	1.85
		25x25	0.40	1.85
	8200	22x35	0.40	2.10
		25x30	0.40	2.10
		30x25	0.40	2.15
	10000	22x40	0.40	2.40
		25x35	0.40	2.40
		30x30	0.40	2.40
		35x25	0.40	2.40
	12000	22x45	0.40	2.70
		25x40	0.40	2.75
		30x30	0.40	2.70
		35x25	0.40	2.75
	15000	25x45	0.40	3.15
		30x35	0.40	3.15
		35x30	0.40	3.25
	18000	25x50	0.40	3.55
		30x40	0.40	3.55
		35x35	0.40	3.55
	22000	30x45	0.40	4.05
		35x35	0.40	3.80
	27000	35x45	0.40	4.70
	33000	35x50	0.40	5.40
	39000	35x45	0.45	5.50
	47000	35x50	0.45	6.00
35 (44)	3300	22x25	0.35	1.40
	3900	22x30	0.35	1.55
		25x25	0.35	1.55
	4700	22x35	0.35	1.80
		25x25	0.35	1.80
	5600	22x35	0.35	1.95
		25x30	0.35	1.95
		30x25	0.35	2.00
	6800	22x40	0.35	2.20
		25x35	0.35	2.25
		30x30	0.35	2.30
		35x25	0.35	2.35
	8200	22x50	0.35	2.55
		25x40	0.35	2.50
		30x30	0.35	2.75
		35x25	0.35	2.75
	10000	25x45	0.35	2.85

Jamicon Series：HS
Teapo Series：LG

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
35 (44)	10000	30x35	0.35	2.90
		35x30	0.35	2.95
	12000	25x50	0.35	3.25
		30x40	0.35	3.25
		35x30	0.35	3.15
	15000	30x45	0.35	3.70
		35x35	0.35	3.65
	18000	35x40	0.35	4.35
	22000	35x50	0.35	4.90
50 (63)	1800	22x25	0.30	1.30
	2200	22x30	0.30	1.55
		25x25	0.30	1.55
	2700	22x30	0.30	1.70
		25x25	0.30	1.70
	3300	22x35	0.30	1.95
		25x30	0.30	1.85
	3900	22x40	0.30	2.15
		25x35	0.30	2.20
		30x25	0.30	1.95
	4700	22x45	0.30	2.45
		25x40	0.30	2.45
		30x30	0.30	2.45
		35x25	0.30	2.50
	5600	22x50	0.30	2.75
		25x40	0.30	2.70
		30x35	0.30	2.75
		35x30	0.30	2.75
	6800	25x50	0.30	3.30
		30x40	0.30	3.30
		35x30	0.30	3.25
	8200	30x45	0.35	3.60
		35x35	0.35	3.55
	10000	30x50	0.35	4.05
		35x40	0.35	4.00
	12000	35x45	0.35	4.55
63 (79)	1200	22x25	0.25	1.20
	1500	22x30	0.25	1.30
		25x25	0.25	1.30
	1800	22x30	0.25	1.50
		25x25	0.25	1.50
	2200	22x35	0.25	1.70
		25x30	0.25	1.75
		30x25	0.25	1.80
	2700	22x40	0.25	2.00
		25x35	0.25	2.00
		30x25	0.25	1.95
	3300	22x50	0.25	2.30
		25x40	0.25	2.30
		30x30	0.25	2.25
		35x25	0.25	2.10
	3900	25x45	0.25	2.55
		30x35	0.25	2.55
		35x30	0.25	2.55
	4700	25x50	0.25	2.85
		30x40	0.25	2.85
		35x30	0.25	2.80
	5600	30x45	0.25	3.20
		35x35	0.25	3.20
	6800	30x50	0.25	3.65
		35x40	0.25	3.65
	8200	35x45	0.35	3.90
	10000	35x50	0.35	4.40
80 (100)	820	22x25	0.20	1.10

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
80 (100)	1000	22x30	0.20	1.20
		25x25	0.20	1.20
	1200	22x30	0.20	1.40
		25x25	0.20	1.40
	1500	22x35	0.20	1.60
		25x30	0.20	1.60
		30x25	0.20	1.65
	1800	22x40	0.20	1.80
		25x35	0.20	1.85
		30x25	0.20	1.80
	2200	22x45	0.20	2.05
		25x35	0.20	2.00
		30x30	0.20	2.05
		35x25	0.20	2.05
	2700	25x45	0.20	2.35
		30x35	0.20	2.35
		35x30	0.20	2.35
	3300	25x50	0.20	2.70
		30x40	0.20	2.70
		35x30	0.20	2.55
	3900	30x45	0.25	3.00
		35x35	0.25	3.00
	4700	30x50	0.25	3.40
		35x40	0.25	3.40
	5600	35x45	0.25	3.80
	6800	35x50	0.25	3.90
100 (125)	560	22x25	0.20	1.05
	680	22x25	0.20	1.20
	820	22x30	0.20	1.30
		25x25	0.20	1.33
	1000	22x35	0.20	1.50
		25x30	0.20	1.50
	1200	22x40	0.20	1.70
		25x35	0.20	1.70
		30x25	0.20	1.70
	1500	22x45	0.20	1.95
		25x40	0.20	2.00
		30x30	0.20	1.95
		35x25	0.20	2.00
	1800	25x45	0.20	2.20
		30x35	0.20	2.50
		35x30	0.20	2.45
	2200	25x50	0.20	2.55
		30x40	0.20	2.70
		35x30	0.20	2.55
	2700	30x45	0.20	2.90
		35x35	0.20	2.85
	3300	30x50	0.20	3.25
		35x40	0.20	3.25
	3900	35x45	0.25	3.70
	4700	35x50	0.25	3.80
160 (200)	220	22x20	0.15	0.80
	270	22x25	0.15	1.00
	330	22x25	0.15	1.20
		25x20	0.15	1.15
	390	22x30	0.15	1.30
		25x25	0.15	1.30
	470	22x30	0.15	1.30
		22x35	0.15	1.40
		25x25	0.15	1.40
	560	22x40	0.15	1.50
		25x30	0.15	1.50
		30x25	0.15	1.50

Jamicon Series：HS
Teapo Series：LG

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
160 (200)	680	22x45	0.15	1.70
		25x35	0.15	1.70
	820	22x50	0.15	1.95
		25x40	0.15	2.00
		30x30	0.15	2.00
		35x25	0.15	1.90
	1000	25x45	0.15	2.20
		30x35	0.15	2.20
		35x30	0.15	2.20
	1200	25x50	0.15	2.45
		30x40	0.15	2.45
		35x30	0.15	2.45
	1500	30x45	0.15	2.88
		35x35	0.15	2.84
	1800	30x50	0.15	3.30
		35x45	0.15	3.30
	2200	35x50	0.15	3.75
180 (225)	180	22x20	0.15	0.75
	220	22x25	0.15	0.85
	270	22x25	0.15	0.95
		25x20	0.15	0.90
	330	22x25	0.15	1.20
		22x30	0.15	1.22
		25x25	0.15	1.25
	390	22x30	0.15	1.30
		25x25	0.15	1.30
	470	22x30	0.15	1.30
		22x35	0.15	1.35
		25x30	0.15	1.40
		30x25	0.15	1.40
	560	22x40	0.15	1.50
		25x35	0.15	1.55
		30x25	0.15	1.50
	680	22x45	0.15	1.70
		22x50	0.15	1.70
		25x35	0.15	1.70
		25x40	0.15	1.75
		30x30	0.15	1.70
		35x25	0.15	1.70
	820	22x50	0.15	1.95
		25x40	0.15	2.00
		25x45	0.15	2.00
		30x35	0.15	2.00
		35x25	0.15	1.90
	1000	25x45	0.15	2.20
		25x50	0.15	2.20
		30x35	0.15	2.25
		30x40	0.15	2.25
		35x30	0.15	2.25
	1200	25x50	0.15	2.45
		30x40	0.15	2.45
		30x45	0.15	2.50
		35x35	0.15	2.50
	1500	30x45	0.15	2.80
		30x50	0.15	2.90
		35x40	0.15	2.90
	1800	30x50	0.15	3.30
		35x50	0.15	3.30
	2200	35x50	0.15	3.60
200 (250)	150	22x20	0.15	0.65
	180	22x20	0.15	0.70
	220	22x25	0.15	0.85
		25x20	0.15	0.80

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
200 (250)	270	22x25	0.15	0.94
		25x25	0.15	1.00
	330	22x30	0.15	1.20
		25x25	0.15	1.20
	390	22x30	0.15	1.30
		22x35	0.15	1.31
		25x30	0.15	1.30
		30x25	0.15	1.30
	470	22x35	0.15	1.40
		22x40	0.15	1.52
		25x30	0.15	1.45
		30x25	0.15	1.50
	560	22x45	0.15	1.75
		25x35	0.15	1.68
		30x30	0.15	1.76
	680	22x50	0.15	2.02
		25x40	0.15	1.96
		30x30	0.15	1.94
		35x25	0.15	1.98
	820	25x45	0.15	2.27
		30x35	0.15	2.26
		35x30	0.15	2.33
	1000	25x50	0.15	2.63
		30x40	0.15	2.64
		35x30	0.15	2.58
		35x35	0.15	3.00
	1200	30x45	0.15	3.04
		35x40	0.15	3.16
	1500	35x45	0.15	3.58
	1800	35x50	0.15	4.10
250 (300)	120	22x20	0.15	0.60
	150	22x25	0.15	0.65
	180	22x25	0.15	0.80
		25x20	0.15	0.75
	220	22x30	0.15	0.95
		25x25	0.15	0.95
	270	22x35	0.15	1.15
		25x30	0.15	1.15
		30x25	0.15	1.15
	330	22x35	0.15	1.19
		25x30	0.15	1.20
		30x25	0.15	1.25
	390	22x40	0.15	1.41
		25x35	0.15	1.50
		30x25	0.15	1.35
	470	22x50	0.15	1.66
		25x40	0.15	1.61
		30x30	0.15	1.59
		35x25	0.15	1.63
	560	25x45	0.15	1.85
		30x35	0.15	1.85
		35x25	0.15	1.78
	680	25x50	0.15	2.14
		30x35	0.15	2.04
		35x30	0.15	2.10
	820	30x45	0.15	2.49
		35x35	0.15	2.45
	1000	35x40	0.15	2.86
	1500	35x50	0.15	3.68
350 (400)	56	22x20	0.15	0.40
	68	22x25	0.15	0.45
	82	22x25	0.15	0.55
		25x20	0.15	0.50

Jamicon Series：HS
Teapo Series：LG

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
350 (400)	100	22x30	0.15	0.70
		25x25	0.15	0.70
	120	22x30	0.15	0.65
		25x25	0.15	0.70
		30x25	0.15	0.75
	150	22x35	0.15	0.68
		25x30	0.15	0.67
		30x25	0.15	0.85
	180	22x40	0.15	0.85
		25x35	0.15	0.90
		30x30	0.15	0.90
	220	22x50	0.15	1.05
		25x40	0.15	1.05
		30x30	0.15	1.00
		35x25	0.15	1.05
	270	25x45	0.15	1.20
		30x35	0.15	1.20
		35x30	0.15	1.20
	330	30x40	0.15	1.35
		35x35	0.15	1.40
	390	30x45	0.15	1.50
		35x35	0.15	1.50
	470	35x40	0.15	1.70
	560	35x45	0.15	1.90
400 (450)	47	22x20	0.15	0.35
	56	22x20	0.15	0.40
	68	22x25	0.15	0.50
		25x20	0.15	0.50
	82	22x25	0.15	0.52
		22x30	0.15	0.60
		25x25	0.15	0.65
	100	22x30	0.15	0.61
		22x35	0.15	0.65
		25x25	0.15	0.65
	120	22x30	0.15	0.7
		22x35	0.15	0.72
		25x30	0.15	0.73
		30x25	0.15	0.75
	150	22x35	0.15	0.81
		22x40	0.15	0.85
		25x30	0.15	0.85
		25x35	0.15	0.86
		30x30	0.15	0.90
		35x25	0.15	0.86
	180	22x40	0.15	0.92
		22x50	0.15	1.03
		25x40	0.15	1.00
		30x30	0.15	0.99
	220	25x45	0.15	1.17
		30x35	0.15	1.16
		35x30	0.15	1.20
	270	25x45	0.15	1.31
		25x50	0.15	1.35
		30x40	0.15	1.36
		35x30	0.15	1.33
	330	25x50	0.15	1.53
		30x45	0.15	1.58
		35x35	0.15	1.56
	390	30x45	0.15	1.67
		30x50	0.15	1.72
		35x40	0.15	1.79
	470	30x45	0.15	1.75
		35x40	0.15	1.85

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
400 (450)	470	30x50	0.15	2.05
		35x45	0.15	2.07
	560	35x45	0.15	2.20
		30x60	0.15	2.33
		35x50	0.15	2.36
	680	35x50	0.15	2.47
		35x60	0.15	2.67
	820	35x55	0.15	2.55
		35x60	0.15	2.60
		30x70	0.15	2.60
	1000	35x65	0.15	2.70
	1200	35x65	0.15	2.80
420(470)	150	22x35	0.20	0.58
		22x40	0.20	0.65
		25x30	0.20	0.70
	180	22x40	0.20	0.68
		25x35	0.20	0.68
	220	25x40	0.20	0.85
		25x45	0.20	0.95
		30x40	0.20	0.95
	270	25x45	0.20	1.05
		30x40	0.20	1.05
		35x30	0.20	1.05
	330	25x50	0.20	1.15
		30x40	0.20	1.15
		35x35	0.20	1.15
	390	30x45	0.20	1.25
	470	30x50	0.20	1.40
		35x40	0.20	1.35
	560	35x45	0.20	1.65
		30x50	0.20	1.58
	680	35x50	0.20	1.80
	820	35x55	0.20	1.95
	1000	35x60	0.20	2.10
450 (500)	47	22x25	0.20	0.39
	56	22x25	0.20	0.42
	68	22x30	0.20	0.50
		25x25	0.20	0.50
	82	22x30	0.20	0.52
		22x35	0.20	0.59
		25x30	0.20	0.60
		30x25	0.20	0.58
	100	22x30	0.20	0.63
		22x40	0.20	0.69
		25x30	0.20	0.65
		30x25	0.20	0.68
	120	22x35	0.20	0.76
		22x45	0.20	0.80
		25x35	0.20	0.77
		30x30	0.20	0.80
		35x25	0.20	0.82
	150	22x40	0.20	0.86
		22x50	0.20	0.90
		25x40	0.20	0.91
		30x30	0.20	0.92
		35x25	0.20	0.99
	180	22x45	0.20	0.92
		25x45	0.20	1.03
		30x35	0.20	1.05
		35x30	0.20	1.08
	220	22x50	0.20	1.12
		25x50	0.20	1.20
		30x40	0.20	1.22

Jamicon Series：HS
Teapo Series：LG

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
450 (500)	220	35x30	0.20	1.20
	270	25x50	0.20	1.36
		30x45	0.20	1.40
		35x35	0.20	1.42
	330	30x45	0.20	1.61
		30x50	0.20	1.65
		35x40	0.20	1.68
	390	30x50	0.20	1.86
		35x45	0.20	1.89
	470	35x45	0.20	1.95
		35x50	0.20	1.98
	560	35x50	0.20	2.03
		35x60	0.20	2.10
	680	35x55	0.20	2.10
		35x60	0.20	2.20
	820	35x65	0.20	2.30
500 (550)	47	22x25	0.25	0.51
	56	22x30	0.25	0.58
	68	25x25	0.25	0.65
	82	22x35	0.25	0.72
		25x30	0.25	0.74
	100	22x40	0.25	0.76
		30x25	0.25	0.82
	120	22x50	0.25	0.93
		25x35	0.25	0.93
		30x30	0.25	0.91
	150	25x45	0.25	1.08
		30x35	0.25	1.04
		35x25	0.25	0.99
	180	25x50	0.25	1.20
		30x40	0.25	1.17
		35x30	0.25	1.10
	220	30x45	0.25	1.33
		35x35	0.25	1.23
	270	30x50	0.25	1.50
		35x40	0.25	1.42
	330	35x45	0.25	1.60
	390	35x50	0.25	1.78
	470	35x60	0.25	2.03

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
550(600)	47	22x30	0.25	0.55
	56	22x35	0.25	0.64
	68	25x30	0.25	0.71
	82	22x40	0.25	0.82
		25x35	0.25	0.83
	100	22x45	0.25	0.86
		30x30	0.25	0.85
	120	22x50	0.25	0.95
		25x40	0.25	0.92
		30x35	0.25	0.96
	150	25x45	0.25	1.08
		30x40	0.25	1.12
		35x30	0.25	1.10
	180	25x50	0.25	1.20
		30x45	0.25	1.23
		35x35	0.25	1.21
	220	30x50	0.25	1.42
		35x40	0.25	1.41
	270	30x50	0.25	1.57
		35x45	0.25	1.64
	330	35x50	0.25	1.73
	390	35x60	0.25	1.92
600(650)	68	25x25	0.25	0.65
	82	25x30	0.25	0.85
	100	25x35	0.25	0.95
	120	30x30	0.25	1.12
		35x25	0.25	1.15
	150	25x40	0.25	1.29
		30x35	0.25	1.36
	180	25x50	0.25	1.45
		30x40	0.25	1.55
		35x30	0.25	1.46
	220	30x45	0.25	1.73
		35x35	0.25	1.75
	270	30x50	0.25	1.82
		35x45	0.25	1.95
	330	35x50	0.25	2.23
	390	35x60	0.25	2.71

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

JAMICON Snap-in Type Aluminium Electrolytic Capacitors TEAPO

Jamicon Series：LT
Teapo Series：LF Long Life Series

550V LINE UP



■ Endurance:85℃ 3000hours
■ Recommended Applications : Smoothing circuit, TV/Monitor, Adapter, SMPS
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics		
Category Temperature Range	-40 ~ +85℃	-40~ +85℃	-25~ +85℃
Rated Voltage Range	10 ~ 100VDC	160 ~500VDC	DC＞500V
Rated Capacitance Range	820 ~ 56000 μF	56 ~ 2200 μF	47 ~ 390 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)		
Leakage Current (20℃)	DC≦500V I = 3√CV DC＞500V I=0.02CVor 3mA whichever is greater . (After rated voltage applied for 5 minutes)		
	I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)		

Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)

WV	10~16	25	35		50		63		80		100		160~400	420~450	500~550
Capacitance	-	-	≦2200	≧3700	≦6800	≧8200	≦6800	≧8200	≦2200	≧2700	≦3300	≧3900	-	-	-
tan δ	0.50	0.40	0.35	0.40	0.30	0.35	0.25	0.35	0.20	0.25	0.20	0.25	0.15	0.20	0.25

Low Temperature Stability Impedance Ratio (MAX)

Measurement frequency : 120Hz

WV	10~16	25	35	50~63	80~100	160~400	420~450	500~550
Z-25℃ / Z+20℃	4	3	3	2	2	4	8	8
Z-40℃ / Z+20℃	15	10	8	6	5	-	-	-

Endurance


After applying rated voltage with rated Ripple current for 3000hrs at 85℃, the capacitor shall meet the following requirement.

Capacitance change	Within ± 20% of initial value
D.F. (tan δ)	Not more than 200% of specified valu
Leakage current	initial specified value or less

Shelf Life

The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 85℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

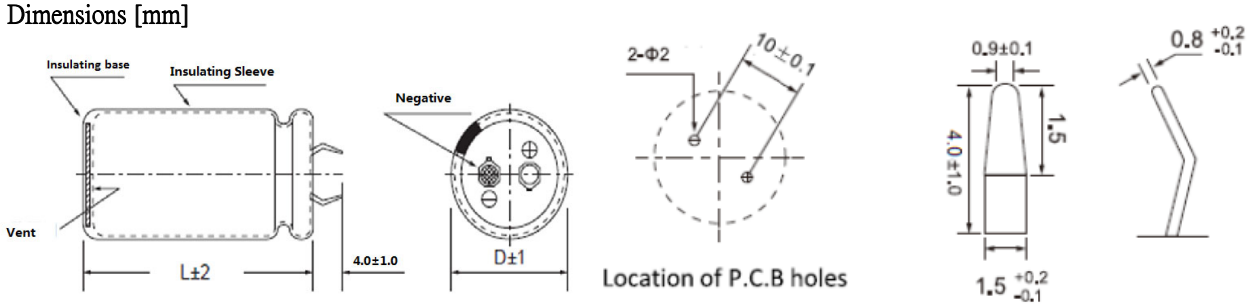

※When the code 11~12 of part number is S1, the terminal length of standard capacitor is 4.0±1.0mm, and when it is SA, the terminal length of standard capacitor is 5.8±1.0mm.

■ Multiplier for Ripple Current

Freq. (Hz)	50	60	120	1K	1K~100K
6.3~100V	0.88	0.90	1.00	1.20	1.20
160~250V	0.75	0.78	1.00	1.30	1.50
350~450V	0.74	0.76	1.00	1.35	1.45
500~550V	0.72	0.74	1.00	1.30	1.40

Jamicon Series：LT
Teapo Series：LF

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms85℃) (120Hz)	ESR (Ω,20℃) (120Hz)
10(13)	12000	22x25	2.45	0.055
	15000	22x30	2.80	0.044
	18000	22x35	3.34	0.037
		25x25	3.15	0.037
	22000	22x40	3.67	0.030
		25x30	3.50	0.030
		30x25	3.60	0.030
	27000	22x45	4.12	0.025
		25x35	4.00	0.025
		30x30	4.16	0.025
	33000	22x50	4.63	0.020
		25x40	4.49	0.020
		30x30	4.45	0.020
		35x25	4.54	0.020
	39000	25x45	4.90	0.017
		30x35	4.90	0.017
		35x30	5.05	0.017
	47000	25x50	5.55	0.014
		30x40	5.61	0.014
		35x30	5.50	0.014
	56000	30x45	6.11	0.012
		35x35	6.05	0.012
16(20)	8200	22x25	2.45	0.081
	10000	22x30	2.81	0.066
	12000	22x35	3.10	0.055
		25x25	2.90	0.055
	15000	22x40	3.46	0.044
		25x30	3.30	0.044
		30x25	3.40	0.044
	18000	22x45	3.81	0.037
		25x35	3.70	0.037
		30x30	3.85	0.037
	22000	22x50	4.32	0.030
		25x45	4.40	0.030
		30x30	4.15	0.030
		35x25	4.23	0.030
	27000	25x45	4.65	0.025
		30x35	4.65	0.025
		35x30	4.79	0.025
	33000	30x40	5.25	0.020
		35x35	5.67	0.020
	39000	30x45	5.86	0.017
		35x35	5.80	0.017
	47000	35x40	6.45	0.014
25(32)	5600	22x25	2.20	0.095
	6800	22x30	2.69	0.078
		25x25	2.56	0.078
	8200	22x35	2.75	0.065
		25x30	2.75	0.065
	10000	22x40	3.25	0.053
		25x30	3.10	0.053
		30x25	3.19	0.053
	12000	22x45	3.50	0.044
		25x35	3.40	0.044
		30x30	3.54	0.044
		35x25	3.64	0.044
	15000	25x45	3.90	0.035
		30x40	4.10	0.035
		35x30	4.21	0.035
	18000	25x45	4.30	0.029
		30x40	4.51	0.029
		35x30	4.39	0.029

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms85℃) (120Hz)	ESR (Ω,20℃) (120Hz)
25(32)	22000	30x45	4.90	0.024
		35x35	4.85	0.024
	27000	30x50	5.45	0.020
		35x40	5.45	0.020
	33000	35x45	6.15	0.016
35(44)	3900	22x25	2.10	0.119
	4700	22x30	2.41	0.099
		25x25	2.30	0.099
	5600	22x35	2.60	0.083
		25x30	2.62	0.083
		30x25	2.70	0.083
		35x25	2.99	0.083
	6800	22x40	2.90	0.068
		25x35	2.93	0.068
		30x30	3.07	0.068
		35x25	3.13	0.068
	8200	22x45	3.30	0.057
		25x35	3.20	0.057
		30x30	3.33	0.057
		35x25	3.42	0.057
	10000	22x50	3.74	0.046
		25x40	3.64	0.046
		30x30	3.60	0.046
		35x25	3.67	0.046
	12000	25x45	4.00	0.039
		30x35	4.00	0.039
		35x30	4.12	0.039
	15000	30x40	4.60	0.031
		35x35	4.47	0.031
	18000	30x45	5.10	0.026
		35x40	5.30	0.026
	22000	35x45	5.70	0.021
	27000	35x50	6.45	0.020
50(63)	2200	22x25	1.92	0.181
	2700	22x30	1.95	0.147
	3300	22x35	2.33	0.121
		25x25	2.24	0.121
	3900	22x40	2.52	0.102
		25x30	2.40	0.102
	4700	22x45	2.78	0.085
		25x35	2.70	0.085
		30x30	2.82	0.085
		35x25	2.89	0.085
	5600	25x35	3.00	0.071
		30x30	3.12	0.071
		35x25	3.21	0.071
	6800	25x40	3.35	0.059
		30x35	3.52	0.059
		35x30	3.62	0.059
	8200	25x50	3.74	0.057
		30x40	3.77	0.057
		35x30	3.70	0.057
	10000	30x45	4.24	0.046
		35x35	4.20	0.046
	12000	30x50	4.65	0.039
		35x40	4.65	0.039
	15000	35x45	5.30	0.031
	18000	35x50	5.90	0.026
63(79)	1800	22x25	1.80	0.184
	2200	225x30	2.00	0.151
		25x25	2.00	0.151
	2700	22x35	2.30	0.123

Jamicon Series：LT
Teapo Series：LF

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms85℃) (120Hz)	ESR (Ω,20℃) (120Hz)
63(79)	2700	25x30	2.30	0.123
	3300	22x40	2.68	0.100
		25x30	2.55	0.100
		30x25	2.63	0.100
	3900	22x45	2.88	0.085
		25x35	2.80	0.085
		30x30	2.91	0.085
	4700	22x50	3.28	0.071
		25x40	3.18	0.071
		30x30	3.15	0.071
		35x25	3.21	0.071
	5600	25x45	3.50	0.059
		30x35	3.50	0.059
		35x30	3.60	0.059
	6800	25x50	3.94	0.049
		30x40	3.98	0.049
		35x30	3.90	0.049
	8200	30x45	4.39	0.057
		35x35	4.35	0.057
	10000	30x50	4.90	0.046
		35x40	4.90	0.046
	12000	35x50	5.45	0.039
80(100)	1200	22x25	1.70	0.221
	1500	22x30	1.95	0.177
		25x25	1.95	0.177
	1800	22x35	2.15	0.147
		25x30	2.15	0.147
	2200	22x40	2.57	0.121
		25x30	2.45	0.121
		30x25	2.52	0.121
	2700	22x45	2.83	0.123
		25x35	2.75	0.123
		30x30	2.86	0.123
	3300	22x50	3.22	0.100
		25x40	3.13	0.100
		30x30	3.10	0.100
		35x25	3.16	0.100
	3900	25x45	3.40	0.085
		30x35	3.40	0.085
		35x30	3.50	0.085
	4700	25x50	3.84	0.071
		30x40	3.88	0.071
		35x35	4.04	0.071
	5600	30x45	4.24	0.059
		35x40	4.43	0.059
	6800	30x50	4.70	0.049
		35x45	4.93	0.049
	8200	30x50	5.25	0.040
100(125)	820	22x25	1.70	0.323
	1000	22x30	1.95	0.265
		25x25	1.95	0.265
	1200	22x35	2.15	0.221
		25x30	2.15	0.221
	1500	22x40	2.57	0.177
		25x30	2.45	0.177
		30x25	2.52	0.177
	1800	22x45	2.83	0.147
		25x35	2.75	0.147
		30x30	2.86	0.147
	2200	22x50	3.17	0.121
		25x40	3.08	0.121
		30x30	3.05	0.121

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms85℃) (120Hz)	ESR (Ω,20℃) (120Hz)
100(125)	2200	35x25	3.11	0.121
	2700	25x45	3.45	0.098
		30x35	3.45	0.098
		35x30	3.55	0.098
	3300	25x50	3.94	0.080
		30x40	3.98	0.080
		35x30	3.90	0.080
	3900	30x45	4.34	0.085
		35x35	4.30	0.085
	4700	35x40	4.75	0.071
	5600	35x50	5.30	0.059
160(200)	330	22x25	1.15	0.603
	390	22x30	1.30	0.510
	470	22x35	1.59	0.423
		25x30	1.62	0.423
	560	22x35	1.99	0.355
		25x30	2.23	0.355
	680	22x40	2.32	0.293
		25x35	2.24	0.293
		30x25	2.29	0.293
	820	22x50	2.32	0.243
		25x40	2.28	0.243
		30x30	2.70	0.243
	1000	25x45	2.58	0.199
		30x35	2.57	0.199
		35x30	2.65	0.199
	1200	25x50	2.78	0.166
		30x40	2.80	0.166
		35x35	2.92	0.166
	1500	30x45	3.03	0.133
		35x40	3.17	0.133
	1800	30x50	3.50	0.111
		35x45	3.67	0.111
	2200	35x50	4.08	0.090
180(225)	270	22x25	1.25	0.737
	330	22x25	1.31	0.603
	390	22x30	1.54	0.510
		25x25	1.54	0.510
	470	22x30	1.69	0.423
		25x25	1.69	0.423
	560	22x35	1.97	0.355
		25x30	1.99	0.355
		30x25	2.06	0.355
	680	22x40	2.30	0.293
		25x35	2.34	0.293
		30x25	2.27	0.293
	820	22x45	2.67	0.243
		25x40	2.72	0.243
		30x30	2.68	0.243
		35x25	2.75	0.243
	1000	25x45	3.16	0.199
		30x35	3.15	0.199
		35x30	3.10	0.199
	1200	30x40	3.65	0.166
		35x30	3.56	0.166
	1500	30x45	4.15	0.133
		35x35	4.09	0.133
	1800	35x40	4.73	0.111
200(250)	220	22x25	1.25	0.904
		25x25	1.33	0.904
	270	22x25	1.67	0.737
		25x25	1.75	0.737

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：LT
Teapo Series：LF

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms85℃) (120Hz)	ESR (Ω,20℃) (120Hz)
200(250)	330	22x30	1.66	0.603
		25x25	1.66	0.603
	390	22x30	1.80	0.510
		25x25	1.80	0.510
		30x25	1.87	0.510
	470	22x35	2.11	0.423
		25x30	2.13	0.423
		30x25	2.21	0.423
	560	22x40	2.44	0.355
		25x35	2.48	0.355
		30x25	2.41	0.355
	680	22x45	2.83	0.293
		25x35	2.73	0.293
		30x30	2.85	0.293
		35x25	2.92	0.293
	820	25x40	3.17	0.243
		30x30	3.13	0.243
		35x25	3.21	0.243
	1000	30x35	3.68	0.199
		35x30	3.80	0.199
	1200	30x40	4.26	0.166
		35x35	4.42	0.166
	1500	35x40	5.02	0.133
250(300)	180	22x25	1.25	1.105
	220	22x25	1.31	0.904
		25x25	1.43	0.904
	270	22x30	1.57	0.737
		25x25	1.57	0.737
	330	22x35	1.85	0.603
		25x30	1.87	0.603
	390	22x35	2.01	0.510
		25x30	2.03	0.510
		30x25	2.10	0.510
	470	22x40	2.34	0.423
		25x35	2.38	0.423
		30x25	2.31	0.423
		35x25	2.54	0.423
	560	25x40	2.74	0.355
		30x30	2.71	0.355
		35x25	2.78	0.355
	680	25x45	3.19	0.293
		30x35	3.18	0.293
		35x30	3.28	0.293
	820	30x40	3.69	0.243
		35x30	3.60	0.243
	1000	30x45	4.28	0.199
		35x35	4.22	0.199
	1200	35x40	4.88	0.166
315(365)	100	22x25	0.75	1.989
	120	22x30	0.80	1.658
	150	22x30	1.00	1.326
		25x25	1.00	1.326
	180	25x35	1.10	1.105
		25x30	1.10	1.105
	220	22x40	1.31	0.904
		25x30	1.25	0.904
		30x25	1.29	0.904
	270	22x45	1.44	0.737
		25x35	1.40	0.737
		30x30	1.46	0.737
		35x25	1.50	0.737
	330	22x50	1.63	0.603

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms85℃) (120Hz)	ESR (Ω,20℃) (120Hz)
315（365）	330	25x40	1.60	0.603
		30x35	1.68	0.603
		35x30	1.74	0.603
	390	25x45	1.75	0.510
		30x35	1.75	0.510
		35x30	1.80	0.510
	470	30x40	2.00	0.423
		35x35	2.06	0.423
	560	30x45	2.20	0.355
		35x40	2.29	0.355
	680	35x45	2.50	0.293
	820	35x50	2.80	0.243
350(400)	82	22x25	0.7	2.426
	100	22x25	0.73	1.989
	120	22x30	0.86	1.658
		25x25	0.86	1.658
	150	22x30	1.05	1.326
		25x25	1.05	1.326
	180	22x35	1.10	1.105
		25x30	1.14	1.105
		30x25	1.18	1.105
	220	22x40	1.35	0.904
		25x35	1.34	0.904
		30x25	1.30	0.904
		35x25	1.39	0.904
	270	25x40	1.57	0.737
		30x30	1.55	0.737
		35x25	1.59	0.737
	330	25x35	1.67	0.603
		30x35	1.82	0.603
		35x30	1.88	0.603
	390	30x40	2.10	0.510
		35x30	2.04	0.510
	470	30x40	2.30	0.423
		35x35	2.38	0.423
	560	35x45	2.74	0.355
	680	35x45	3.18	0.293
400(450)	68	22x25	0.70	2.926
	82	22x25	0.76	2.426
	100	22x30	0.91	1.989
		25x25	0.91	1.989
	120	22x30	1.00	1.658
		25x25	1.00	1.658
		30x25	1.06	1.658
	150	22x35	1.19	1.326
		25x30	1.20	1.326
		30x25	1.25	1.326
	180	22x40	1.38	1.105
		25x35	1.40	1.105
		30x25	1.37	1.105
	220	22x50	1.69	0.904
		25x40	1.64	0.904
		30x30	1.62	0.904
		35x25	1.66	0.904
	270	25x45	1.92	0.737
		30x35	1.91	0.737
		35x30	1.97	0.737
	330	25x50	2.22	0.603
		30x40	2.23	0.603
		35x30	2.18	0.603
	390	30x45	2.55	0.510
		35x35	2.52	0.510

Jamicon Series：LT
Teapo Series：LF

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms85℃) (120Hz)	ESR (Ω,20℃) (120Hz)
400(450)	470	35x40	2.92	0.423
	560	35x45	3.34	0.355
450(500)	56	22x25	0.65	4.737
	68	22x30	0.75	3.901
	82	22x30	0.85	3.235
		25x25	0.85	3.235
	100	22x35	0.97	2.653
		25x30	0.98	2.653
	120	22x40	1.13	2.210
		25x30	1.08	2.210
		30x25	1.12	2.210
	150	22x45	1.33	1.768
		25x35	1.28	1.768
		30x30	1.34	1.768
	180	25x40	1.49	1.474
		30x30	1.47	1.474
		35x25	1.50	1.474
	220	25x45	1.73	1.206
		30x35	1.72	1.206
		35x30	1.78	1.206
	270	30x40	2.02	0.982
		35x35	2.10	0.982
	330	30x45	2.35	0.804
		35x35	2.32	0.804
	390	35x40	2.66	0.680
	470	35x45	3.07	0.564
500(550)	56	22x30	0.70	5.921
	68	22x35	0.82	4.876
	82	22x40	0.96	4.044
		25x30	0.91	4.044
	100	22x45	1.11	3.316
		25x35	1.07	3.316
	120	22x50	1.22	2.763

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms85℃) (120Hz)	ESR (Ω,20℃) (120Hz)
500(550)	120	25x40	1.19	2.763
		30x30	1.17	2.763
	150	25x45	1.40	2.210
		30x35	1.40	2.210
		35x25	1.35	2.210
	180	25x50	1.61	1.842
		30x40	1.62	1.842
		35x30	1.58	1.842
	220	30x45	1.75	1.507
		35x35	1.72	1.507
	270	30x50	1.88	1.228
		35x40	1.85	1.228
	330	35x45	1.98	1.005
	390	35x50	2.19	0.850
550(600)	47	22x30	0.64	7.055
	56	22x35	0.74	5.921
	68	22x40	0.87	4.876
	82	22x45	1.00	4.044
		25x35	0.97	4.044
	100	22x50	1.16	3.316
		25x40	1.13	3.316
		30x30	1.11	3.316
	120	25x45	1.30	2.763
		30x35	1.30	2.763
	150	25x50	1.46	2.210
		30x40	1.47	2.210
		35x30	1.44	2.210
	180	30x45	1.70	1.842
		35x35	1.67	1.842
	220	30x50	1.79	1.507
		35x40	1.77	1.507
	270	35x45	2.11	1.228
	330	35x50	2.39	1.005

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：LB
Teapo Series：GA

Long Life&Large Capacitance



■ Endurance: 85℃ 3000hours
■ Recommended Applications : Applying to switching power supply and other industry/ commercial field
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics	
Category Temperature Range	-40~+85℃	-25~+85℃
Rated Voltage Range	16 ~ 500VDC	＞500 VDC
Rated Capacitance Range	560 ~ 270000 μF	330 ~ 1200 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)	
Leakage Current (20℃)	DC≦500V I = 3$\sqrt{CV}$ DC＞500V I=0.02CVor 3mA whichever is greater (After rated voltage applied for 5 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)	

Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)

WV		16	25	35	50	63		80		100	160~450	500~550
Capacitance		—	—	—	—	≦27,000	＞27,000	≦15,000	＞15,000	—	—	—
tan δ	35Φ	0.80	0.60	0.50	0.40	0.35	0.40	0.25	0.30	0.25	0.15	0.20
	40Φ	0.90	0.70	0.60	0.45	0.35	0.40	0.25	0.30	0.25	0.15	0.20
	45Φ	1.00	0.80	0.70	0.50	0.35	0.40	0.25	0.30	0.25	0.15	0.20
	50Φ	1.20	1.00	0.75	0.55	0.35	0.40	0.25	0.30	0.25	0.15	0.20

Low Temperature Stability Impedance Ratio (MAX)

Measurement frequency : 120Hz

WV	16~100	160~250	350~450	500~550
Z-25℃ / Z+20℃	4	6	8	8
Z-40℃ / Z+20℃	15	—	—	—

Endurance

After applying rated voltage with rated Ripple current for 3000hrs at 85℃,when the capacitors are restored to 20℃, the capacitor shall meet the following requirements.


Capacitance change	Within ± 20% of initial value
D.F. (tan δ)	Not more than 200% of specified value
Leakage current	initial specified value or less

Shelf Life


The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 85℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]


Code 11~13：S1G(35Φ)

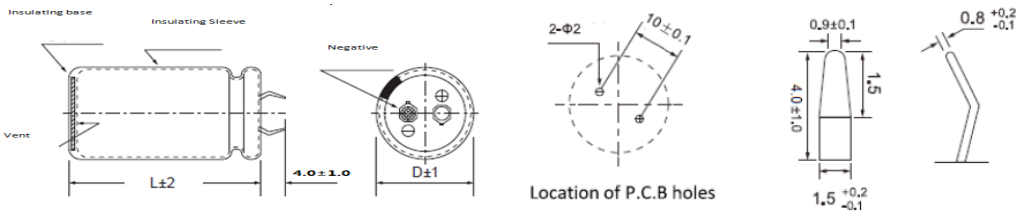

Code 11~13：L4A(35~45Φ)

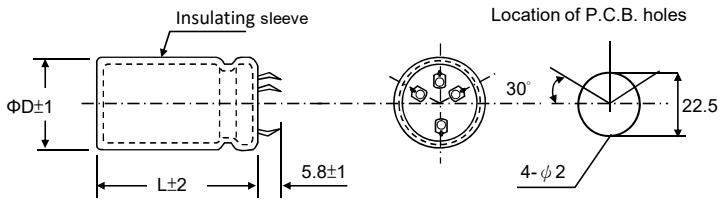

Code 11~13：L5A(50Φ)

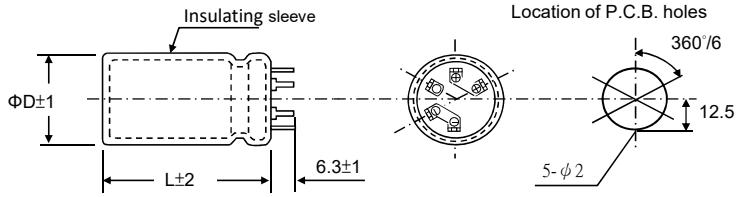

※When the code 11~12 of part number is S1, the terminal length of standard capacitor is 4.0±1.0mm, and when it is SA, the terminal length of standard capacitor is 5.8±1.0mm.

■ Multiplier for Ripple Current

Freq. (Hz)	60	120	400	1K	10K
≦100V	0.80	1.00	1.10	1.20	1.20
>100V	0.80	1.00	1.10	1.30	1.40

Jamicon Series：LB
Teapo Series：GA

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms85℃) (120Hz)
16 (20)	82000	35x60	0.80	10.25
		45x51	1.00	10.38
	100000	35x80	0.80	11.15
		40x61	0.90	11.60
		45x50	1.00	10.84
	120000	35x80	0.80	12.39
		40x81	0.90	12.47
		45x60	1.00	11.10
		50x50	1.20	13.47
	150000	40x91	0.90	13.55
		45x70	1.00	12.23
		50x60	1.20	14.83
	180000	40x101	0.90	14.92
		45x80	1.00	13.61
		50x80	1.20	16.05
	220000	45x90	1.00	15.16
		50x90	1.20	17.35
	270000	50x100	1.20	17.81
25 (32)	56000	35x60	0.60	8.81
		40x51	0.70	9.12
	68000	35x80	0.60	10.62
		40x61	0.70	10.48
		45x50	0.80	9.66
	82000	35x90	0.60	11.35
		40x71	0.70	11.02
		45x60	0.80	10.26
		50x50	1.00	12.54
	100000	35x100	0.60	12.06
		40x81	0.70	12.41
		45x70	0.80	11.63
		50x60	1.00	13.68
	120000	40x91	0.70	13.75
		45x80	0.80	12.96
		50x80	1.00	15.38
	150000	40x101	0.70	14.00
		45x90	0.80	13.36
		50x90	1.00	16.29
	180000	45x100	0.80	14.61
		50x100	1.00	17.31
35 (44)	33000	35x60	0.50	7.97
	39000	35x60	0.50	8.00
		40x51	0.60	8.22
	47000	35x80	0.50	9.56
		40x61	0.60	9.74
		45x50	0.70	8.88
	56000	35x90	0.50	10.53
		40x81	0.60	10.83
		45x60	0.70	9.76
		50x50	0.75	10.97
	68000	35x100	0.50	11.07
		40x91	0.60	11.64
		45x70	0.70	11.08
		50x60	0.75	12.23
	82000	40x101	0.60	12.33
		45x90	0.70	12.07
		50x80	0.75	13.22
	100000	45x100	0.70	12.81
		50x90	0.75	14.22
	120000	50x100	0.75	15.02
50 (63)	27000	35x80	0.40	9.14
		40x51	0.45	8.16
		45x50	0.50	8.23

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms85℃) (120Hz)
50 (63)	33000	35x80	0.40	9.41
		40x61	0.45	9.11
		45x60	0.50	9.18
		50x50	0.55	10.73
	39000	35x90	0.40	9.99
		40x81	0.45	10.44
		45x70	0.50	9.92
		50x60	0.55	11.52
	47000	35x100	0.40	10.59
		40x91	0.45	11.18
		45x70	0.50	10.09
		50x60	0.55	11.88
	56000	40x101	0.45	11.77
		45x90	0.50	11.31
		50x80	0.55	12.75
	68000	45x100	0.50	12.5
		50x90	0.55	13.70
	82000	50x100	0.55	12.50
63 (79)	15000	35x60	0.35	7.74
		40x51	0.35	8.46
	18000	35x80	0.35	9.63
		40x61	0.35	9.47
		45x50	0.35	9.33
	22000	35x90	0.35	10.27
		40x71	0.35	9.94
		45x60	0.35	9.89
	27000	35x100	0.35	10.44
		40x81	0.35	10.94
		45x70	0.35	10.97
		50x50	0.35	11.15
	33000	40x101	0.40	12.08
		45x80	0.40	11.62
		50x60	0.40	11.67
	39000	45x90	0.40	11.93
		50x70	0.40	12.22
	47000	45x100	0.40	12.67
		50x80	0.40	13.19
	56000	50x100	0.40	14.05
80 (100)	10000	35x60	0.25	7.26
	12000	35x70	0.25	8.26
		40x51	0.25	7.77
		45x50	0.25	8.26
	15000	35x80	0.25	8.91
		40x61	0.25	8.52
		45x60	0.25	9.06
	18000	35x90	0.30	10.34
		40x81	0.30	10.61
		45x70	0.30	10.64
		50x50	0.30	10.13
	22000	35x100	0.30	10.18
		40x91	0.30	10.49
		45x80	0.30	10.58
		50x60	0.30	11.36
	27000	40x101	0.30	11.75
		45x90	0.30	11.90
		50x80	0.30	12.43
	33000	45x100	0.30	12.26
		50x90	0.30	13.44
	39000	50x100	0.30	14.71
100 (125)	6800	35x60	0.25	7.22
		40x51	0.25	7.45
	8200	35x70	0.25	8.07

Jamicon Series：LB
Teapo Series：GA

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms85℃) (120Hz)
100 (125)	8200	45x61	0.25	8.40
		50x50	0.25	8.28
	10000	35x90	0.25	9.21
		40x71	0.25	8.67
		45x60	0.25	8.63
		50x50	0.25	9.00
	12000	35x100	0.25	8.83
		40x81	0.25	8.92
		45x70	0.25	8.94
		50x60	0.25	10.34
	15000	40x101	0.25	10.30
		45x80	0.25	9.91
		50x70	0.25	10.96
	18000	45x90	0.25	10.25
		50x80	0.25	11.12
	22000	50x100	0.25	12.59
160 (200)	3300	35x60	0.15	6.33
		40x51	0.15	6.38
	3900	35x80	0.15	7.43
		40x61	0.15	7.48
		45x50	0.15	7.37
	47000	35x90	0.15	8.38
		40x81	0.15	8.37
		45x60	0.15	7.85
		50x50	0.15	8.40
	5600	35x100	0.15	8.30
		40x81	0.15	8.37
		45x60	0.15	7.86
		50x60	0.15	9.12
	6800	40x101	0.15	8.34
		45x80	0.15	8.02
		50x70	0.15	9.82
	8200	45x90	0.15	8.24
		50x80	0.15	10.04
	10000	45x100	0.15	8.75
		50x90	0.15	10.46
	12000	50x100	0.15	12.00
180 (225)	2200	35x60	0.15	5.69
	2700	35x70	0.15	5.06
		40x61	0.15	5.14
	3300	35x80	0.15	5.58
		40x61	0.15	5.68
		45x50	0.15	5.59
	3900	35x90	0.15	5.78
		40x71	0.15	6.56
		45x60	0.15	6.16
		50x50	0.15	7.06
	4700	35x100	0.15	6.18
		40x81	0.15	6.74
		45x70	0.15	6.33
		50x60	0.15	7.89
	5600	40x101	0.15	7.85
		45x80	0.15	7.55
		50x70	0.15	8.37
	6800	45x90	0.15	8.45
		50x80	0.15	8.51
	8200	45x100	0.15	8.64
		50x90	0.15	8.74
	10000	50x100	0.15	9.27
200 (250)	2200	35x60	0.15	5.69
		40x51	0.15	5.47
	2700	35x70	0.15	5.83

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms85℃) (120Hz)
200 (250)	2700	40x61	0.15	5.91
		45x50	0.15	8.83
	3300	35x80	0.15	6.48
		40x61	0.15	6.19
		45x60	0.15	6.58
		50x50	0.15	7.58
	3900	35x90	0.15	7.22
		40x71	0.15	6.99
		45x60	0.15	6.96
		50x60	0.15	8.87
	4700	40x91	0.15	7.84
		45x70	0.15	7.45
		50x70	0.15	9.90
	5600	40x101	0.15	8.13
		45x80	0.15	7.82
		50x70	0.15	10.26
	6800	45x90	0.15	8.13
		50x80	0.15	11.66
	7500	45x100	0.15	8.26
		50x90	0.15	12.54
	8200	50x100	0.15	13.36
250 (300)	1800	35x60	0.15	4.56
		40x51	0.15	4.59
	2200	35x80	0.15	5.29
		40x61	0.15	5.06
		45x50	0.15	4.98
	2700	35x80	0.15	5.86
		40x81	0.15	6.34
		45x60	0.15	5.95
		50x50	0.15	6.86
	3300	35x100	0.15	7.17
		40x81	0.15	7.01
		45x70	0.15	7.03
		50x60	0.15	7.97
	3900	40x101	0.15	8.19
		45x80	0.15	7.87
		50x70	0.15	8.57
	4700	45x90	0.15	8.84
		50x80	0.15	9.69
	5600	45x100	0.15	9.82
		50x90	0.15	10.84
	6800	50x100	0.15	12.16
350 (400)	1000	35x60	0.15	3.84
		40x51	0.15	3.86
	1200	35x80	0.15	4.67
		40x61	0.15	4.46
		45x50	0.15	4.39
		50x50	0.15	5.22
	1500	35x80	0.15	5.09
		40x71	0.15	5.2
		45x60	0.15	5.18
		50x60	0.15	6.03
	1800	35x100	0.15	6.03
		40x81	0.15	5.90
		45x80	0.15	6.26
		50x80	0.15	3.97
	2200	40x101	0.15	7.03
		45x90	0.15	7.12
		50x90	0.15	7.93
	2700	45x100	0.15	8.06
		50x100	0.15	8.98
400 (450)	820	35x60	0.15	3.55

Jamicon Series：LB
Teapo Series：GA

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms85℃) (120Hz)
400 (450)	820	40x51	0.15	3.58
	1000	35x80	0.15	4.26
		40x61	0.15	4.26
		45x50	0.15	4.29
		50x50	0.15	4.77
	1200	35x80	0.15	4.56
		40x61	0.15	4.56
		45x60	0.15	5.07
		50x60	0.15	5.51
	1500	35x100	0.15	5.51
		40x81	0.15	5.52
		45x80	0.15	6.14
		50x80	0.15	6.66
	1800	40x101	0.15	6.67
		45x90	0.15	6.92
		50x90	0.15	7.51
	2200	45x100	0.15	7.46
		50x100	0.15	8.50
450(500)	560	35x60	0.15	2.94
	680	35x70	0.15	3.39
		40x51	0.15	3.19
		45x50	0.15	3.39
	820	35x80	0.15	3.95
		40x61	0.15	3.77
		45x60	0.15	4.01
		50x50	0.15	5.04
	1000	35x90	0.15	4.39
		40x81	0.15	4.50
		45x70	0.15	4.51
		50x60	0.15	5.03
	1200	35x100	0.15	4.80
		40x81	0.15	4.70
		45x80	0.15	4.99
		50x80	0.15	5.83
	1500	40x101	0.15	5.8
		45x90	0.15	5.88
		50x90	0.15	6.7
	1800	45x100	0.15	6.75
		50x100	0.15	7.51
500(550)	390	35x60	0.20	2.83
		40x51	0.20	2.94
	470	35x60	0.20	2.59
		40x51	0.20	2.71

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms85℃) (120Hz)
500(550)	470	45x50	0.20	2.88
	560	35x80	0.20	3.66
		40x61	0.20	3.13
		45x60	0.20	3.33
		50x50	0.20	3.54
	680	35x80	0.20	3.25
		40x81	0.20	4.52
		45x70	0.20	4.53
		50x60	0.20	4.13
	820	35x100	0.20	4.04
		40x81	0.20	3.95
		45x80	0.20	4.20
		50x70	0.20	4.57
	1000	40x101	0.20	4.82
		45x90	0.20	4.88
		50x80	0.20	5.13
	1200	45x100	0.20	5.61
		50x90	0.20	5.79
	1500	50x100	0.20	6.64
550(600)	330	35x60	0.20	2.52
		40x51	0.20	2.62
	390	35x70	0.20	2.83
		40x61	0.20	2.97
		45x50	0.20	2.93
	470	35x80	0.20	3.18
		40x71	0.20	3.36
		45x60	0.20	3.35
		50x60	0.20	3.19
	560	35x90	0.20	3.52
		40x81	0.20	3.75
		45x70	0.20	3.76
		50x60	0.20	3.61
	680	35x100	0.20	3.92
		40x91	0.20	4.19
		45x80	0.20	4.23
		50x70	0.20	4.08
	820	40x101	0.20	4.27
		45x90	0.20	4.33
		50x80	0.20	4.55
	1000	45x100	0.20	4.14
		50x90	0.20	5.07
	1200	50x100	0.20	5.65

Jamicon Series：LL
Teapo Series：GC Long Life Series


■ Endurance:85℃ 5000hours
■ Recommended Applications :UPS、service system、press working equipment、charging equipment、inverter、converter
■ Corresponding product to RoHS



■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +85℃
Rated Voltage Range	160 ~ 450VDC
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I = $\sqrt[3]{CV}$. (After rated voltage applied for 5 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 160 / 200 / 250 / 350 / 385 / 400 / 420 / 450 tan δ: 0.15 / 0.15 / 0.15 / 0.15 / 0.15 / 0.15 / 0.20 / 0.20
Low Temperature Stability Impedance Ratio (MAX)	Measurement frequency : 120Hz Rated voltage(V): 160~250 / 350~450 Z-25℃ / Z+20℃: 4 / 8
Endurance	After applying rated voltage with rated ripple current for 5000 hours at 85℃ , the capacitors shall meet the following requirements. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than200% of specified value Leakage current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 85℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

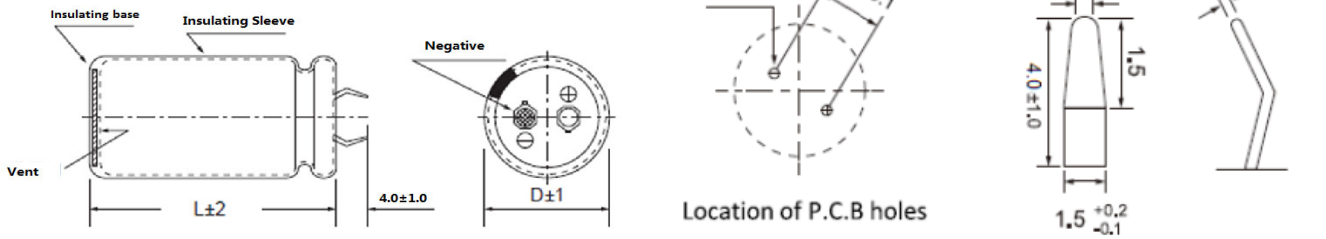

※When the code 11~12 of part number is S1, the terminal length of standard capacitor is 4.0±1.0mm, and when it is SA, the terminal length of standard capacitor is 5.8±1.0mm.

■ Multiplier for Ripple Current

WV \ Freq. (Hz)	60	120	400	1k	10k
≧160V	0.8	1.00	1.10	1.30	1.40

Jamicon Series：LL
Teapo Series：GC

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms 85℃) (120Hz)
160V (200)	220	22x25	0.15	1.13
	330	22x30	0.15	1.44
	470	22x35	0.15	1.85
		25x30	0.15	1.85
	680	22x45	0.15	2.47
		25x35	0.15	2.47
		30x30	0.15	2.47
	1000	25x45	0.15	3.19
		30x35	0.15	3.19
		35x30	0.15	3.19
	1500	30x45	0.15	4.33
		35x40	0.15	4.33
	2200	35x50	0.17	5.97
200V (250)	220	22x25	0.15	1.13
	330	22x30	0.15	1.44
		25x25	0.15	1.55
	470	22x40	0.15	1.96
		25x30	0.15	1.96
		30x25	0.15	1.96
	680	25x40	0.15	2.58
		30x30	0.15	2.47
	1000	30x40	0.15	3.40
		35x35	0.15	3.61
	1500	35x45	0.15	4.74
250V (300)	150	22x25	0.15	0.94
	220	22x30	0.15	1.24
		25x25	0.15	1.24
	330	22x40	0.15	1.65
		25x30	0.15	1.65
	470	25x40	0.15	2.16
		30x30	0.15	2.06
	560	25x45	0.15	2.50
		30x35	0.15	2.50
		35x25	0.15	2.50
	680	30x40	0.15	2.78
		35x30	0.15	2.78
	1000	35x40	0.15	3.71
350V (400)	68	22x25	0.15	0.63
	100	22x30	0.15	0.81
		25x25	0.15	0.82
	150	22x40	0.15	1.13
		25x30	0.15	1.03
	220	22x50	0.15	1.11
		25x40	0.15	1.44
		30x30	0.15	1.44
	330	25x50	0.15	1.96
		30x40	0.15	1.96
		35x30	0.15	1.96
	470	30x50	0.15	2.58
		35x40	0.15	2.58
	560	35x45	0.15	2.88
	680	35x50	0.15	3.12
385V	68	22x25	0.15	0.63
	100	22x30	0.15	0.81
		25x25	0.15	0.82
	150	22x40	0.15	1.03
		25x30	0.15	1.03
	220	22x50	0.15	1.44
		25x40	0.15	1.44
		30x30	0.15	1.44
	330	25x50	0.15	1.96
		30x40	0.15	1.96

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms 85℃) (120Hz)
385V	330	35x30	0.15	1.96
	470	30x50	0.15	2.58
		35x40	0.15	2.58
	560	35x45	0.15	2.88
	680	35x50	0.15	3.12
400V (450)	68	22x25	0.15	0.63
	100	22x30	0.15	0.81
		25x25	0.15	0.82
	120	22x35	0.15	0.95
		25x30	0.15	0.95
	150	22x40	0.15	1.13
		25x35	0.15	1.13
		30x25	0.15	1.13
	180	25x40	0.15	1.24
		30x30	0.15	1.24
	220	25x40	0.15	1.44
		30x35	0.15	1.55
	270	25x45	0.15	1.65
		30x35	0.15	1.65
		35x25	0.15	1.65
	330	30x45	0.15	2.06
		35x35	0.15	2.06
	390	30x50	0.15	2.27
		35x40	0.15	2.27
	470	35x45	0.15	2.68
	560	35x50	0.15	2.99
420V (470)	100	22x30	0.20	0.81
		25x25	0.20	0.82
	120	22x40	0.20	0.97
		25x30	0.20	0.97
	150	22x45	0.20	1.11
		25x35	0.20	1.14
		30x25	0.20	1.15
	180	22x50	0.20	1.30
		25x35	0.20	1.25
		30x30	0.20	1.30
	220	25x40	0.20	1.45
		30x35	0.20	1.50
	270	25x50	0.20	1.70
		30x35	0.20	1.67
		35x30	0.20	1.76
	330	30x45	0.20	2.02
		35x35	0.20	2.04
	390	30x50	0.20	2.29
		35x40	0.20	2.29
	470	35x45	0.20	2.66
	560	35x50	0.20	3.02
450V (500)	47	22x25	0.20	0.53
	68	22x30	0.20	0.67
		25x25	0.20	0.68
	100	22x40	0.20	0.91
		25x30	0.20	0.89
		30x25	0.20	0.93
	150	22x50	0.20	1.20
		25x40	0.20	1.24
		30x30	0.20	1.13
	180	25x45	0.20	1.34
		30x35	0.20	1.34
		35x30	0.20	1.34
	220	30x40	0.20	1.55
		35x30	0.20	1.55
	270	30x45	0.20	1.85

Jamicon Series：LL
Teapo Series：GC

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms 85℃) (120Hz)
450V (500)	270	35x35	0.20	1.85
	330	35x40	0.20	2.16

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms 85℃) (120Hz)
450V (500)	470	35x50	0.20	2.78

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：LN
Teapo Series：LN

Long Life Series




■ Endurance : 85℃ 10000 hours
■ Recommended application: Smooth circuit, switching power supply, photovoltaic industry, large-scale electronic equipment and other industries
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +85℃
Rated Voltage Range	400~ 450VDC
Rated Capacitance Range	82~ 820μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I≤ $3\sqrt{CV}$ (After rated voltage applied for 5minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV 400 420 450 tan δ 0. 2 0. 2 0. 2
Low Temperature Stability Impedance Ratio (MAX)	Measurement frequency : 120Hz Rated voltage(V) 400 420 450 Z-25℃ / Z+20℃ 6 6 6 Z-40℃ / Z+20℃ 15 15 15
Endurance	In an environment of 85 ℃, the rated ripple current is superimposed within the range of rated voltage,test 10000h After When the temperature is restored to 20 ℃ for measurement, the following requirements should be met. Capacitance change: Within ± 20% of initial value DF. (tan δ): Not more than 200% of specified value Leakage current: initial specified value or less
Shelf Life	After 1000 hours of storage at 85 ℃, the temperature should be restored to 20 ℃ for measurement. Before measurement, pre experimental treatment should be conducted (refer to Article 4.1 of JIS C 5101-4 for treatment methods). The capacitor should meet the same requirements as durability

■ Dimensions [mm]

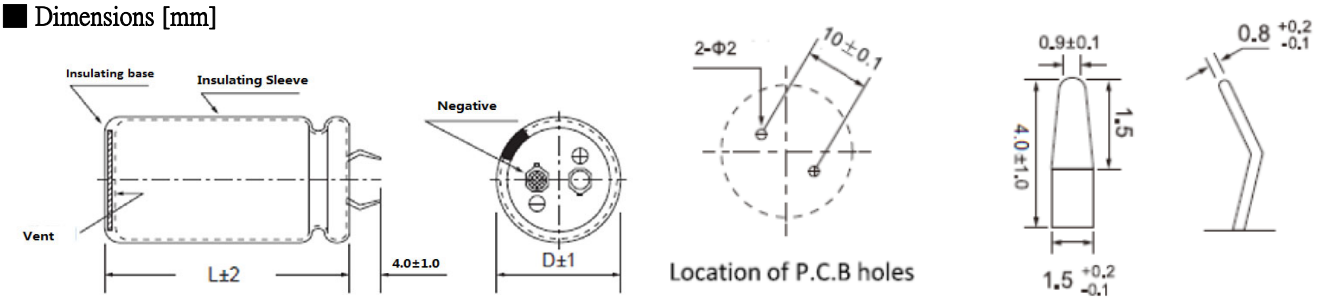

※When the code 11~12 of part number is S1, the terminal length of standard capacitor is 4.0±1.0mm, and when it is SA, the terminal length of standard capacitor is 5.8±1.0mm.

■ Ripple current frequency correction co

Freq. (Hz)	60	120	400	1K	10K
400~450V	0.80	1.00	1.10	1.30	1.40

■ temperature coefficient

nbient temperatu	40	60	70	85
coefficient	1.8	1.40	1.20	1.00

Jamicon Series：LN

Teapo Series：LN

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms85℃) (120Hz)
400(450)	100	25x25	0.20	0.91
	120	25x30	0.20	1.18
	180	25x40	0.20	1.62
	220	30x30	0.20	1.86
	270	30x35	0.20	2.10
	390	30x45	0.20	2.68
		35x35	0.20	2.68
	470	30x50	0.20	2.98
		35x40	0.20	2.98
	560	30x55	0.20	3.34
		35x45	0.20	3.25
	680	35x50	0.20	3.70
	820	35x60	0.20	4.22
420(470)	82	25x25	0.20	0.87
	120	25x35	0.20	1.21
	180	25x40	0.20	1.45
		30x30	0.20	1.45
	270	30x35	0.20	1.75
	330	30x40	0.20	1.93
	390	35x35	0.20	2.10

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms85℃) (120Hz)
420(470)	390	35x45	0.20	2.15
	470	30x60	0.20	2.98
		35x45	0.20	2.98
	560	35x50	0.20	3.28
	680	35x60	0.20	3.73
450(500)	82	25x25	0.20	0.82
	120	25x35	0.20	1.17
	180	25x45	0.20	1.48
		30x30	0.20	1.48
	220	30x35	0.20	1.88
	270	30x40	0.20	2.10
	330	30x45	0.20	2.34
		35x35	0.20	2.28
	390	30x50	0.20	2.52
	420	30x55	0.20	2.68
		35x40	0.20	2.63
	470	30x60	0.20	2.89
		35x45	0.20	2.86
	560	35x50	0.20	3.19
	650	35x60	0.20	3.58

Jamicon Series：PA
Teapo Series：PA

Long Life Series



- Endurance : 85℃ 10000~18000 hours
- Recommended applications: smooth circuit, switching power supply, photovoltaic industry, large-scale ele equipment and other industries
- Corresponding product to RoHS

SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +85℃
Rated Voltage Range	35~ 450VDC
Rated Capacitance Range	68~ 100000 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I≤ $3\sqrt{CV}$ (After rated voltage applied for 5minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)

Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)

WV	35	50	63		100		200~250	350	400	450
CAP.	-	-	≤6800	≥8200	≤3300	≥3900	-	-	-	-
tan δ	0.4	0.35	0.3	0.35	0.2	0.3	0.15	0.15	0.2	0.2

Low Temperature Stability Impedance Ratio (MAX)

Measurement frequency : 120Hz

Rated voltage(V)	35	50	63	100	200~250	350	400~450
Z-25℃ / Z+20℃	3	3	3	2	4	4	8
Z-40℃ / Z+20℃	10	8	8	5	5	15	15

Endurance

In an environment of 85 ℃, the rated ripple current is superimposed within the range of rated voltage, and the service life is shown in the following table:

ΦDiameter(mm)	Life(h)
25	10000
30	13000
35	15000
40~50	18000


When the temperature is restored to 20 ℃ for measurement, the following requirements should be met.

Capacitance change	Within ± 10% of initial value
DF. (tan δ)	Not more than 200% of specified value
Leakage current	initial specified value or less
ESR.	Up to 200% of initial value

Shelf Life

After 1000 hours of storage at 85 ℃, the temperature should be restored to 20 ℃ for measurement. Before measurement, pre experimental treatment should be conducted (refer to Article 4.1 of JIS C 5101-4 for treatment methods). The capacitor should meet the same requirements as durability

Dimensions [mm]

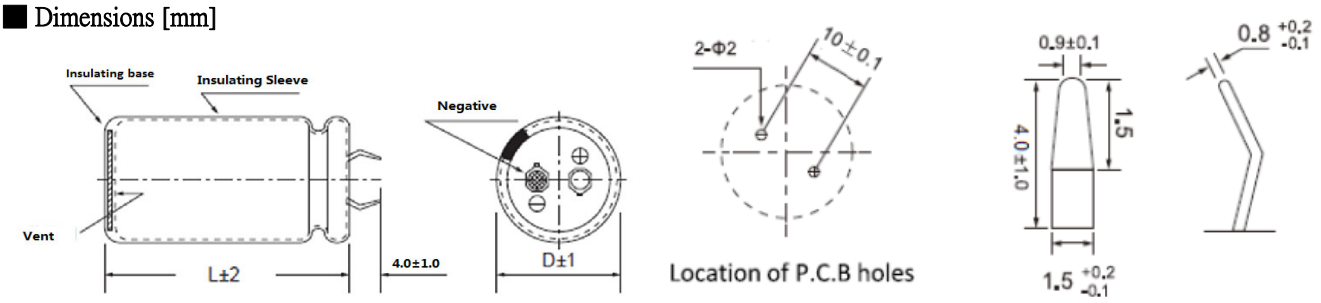

※When the code 11~12 of part number is S1, the terminal length of standard capacitor is 4.0±1.0mm, and when it is SA, the terminal length of standard capacitor is 5.8±1.0mm.

Ripple current frequency correction co

Freq. (Hz)	50	60	120	1K	10K~100K
35~100V	0.75	0.80	1.00	1.20	1.35
200~250V	0.7	0.78	1.00	1.30	1.40
305~450V	0.72	0.75	1.00	1.35	1.45

temperature coefficient

mbient temperatu	40	60	85
coefficient	2.44	2.16	1.00

Jamicon Series：PA

Teapo Series：PA

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms85℃) (120Hz)	ESR (mΩ,20℃) (10KHz)
35(44)	33000	40x50	7.16	38
	56000	40x80	11.68	21
	100000	40x105	14.18	16
63(79)	2200	25x30	2.13	118
	2700	25x25	2.43	101
	3300	30x30	2.77	88
		25x40	2.73	88
	4700	30x35	3.24	72
	5600	30x40	2.56	66
	6800	35x35	3.95	59
		30x50	4.07	59
	8200	35x40	4.31	55
		40x30	3.95	72
	10000	35x50	4.85	51
		40x35	4.59	722
	12000	40x40	5.42	57
	15000	40x50	7.02	39
	18000	40x60	8.54	31
	27000	40x80	10.53	21
	39000	40x105	12.23	17
100(125)	1000	25x30	1.67	182
	1200	25x35	1.93	152
	1500	30x30	2.30	122
		25x40	2.27	122
	1800	30x35	2.64	103
	2200	30x40	3.05	85
	2700	35x35	3.57	69
		40x30	3.72	104
	3300	30x50	4.05	57
		35x40	4.11	57
		40x35	4.09	92
	3900	40x40	4.88	74
	4700	35x50	5.23	41
		40x45	5.60	61
	5600	40x50	6.41	51
	6800	40x55	6.61	46
	8200	40x60	7.36	39
	12000	40x80	9.14	27
	18000	10x105	11.34	17
200（250）	330	25x30	1.18	340
	390	25x35	1.36	288
	470	30x30	1.58	240
		25x40	1.56	240
	560	30x35	1.82	202
	680	30x40	2.10	167
	820	35x35	2.43	139
		40x30	3.06	142
	1000	30x50	2.76	114
		35x40	2.81	114
		40x35	3.43	124
	1200	35x50	3.06	82
		40x40	4.02	99
	1500	35x50	3.70	77
		40x45	4.61	81
	1800	40x50	5.27	68
	2200	40x60	6.29	53
	3300	40x80	7.83	37
	4700	40x105	8.08	32
	5600	45x105	8.51	29
	8200	50x105	9.17	25
250（300）	220	25x30	0.97	473
	270	25x35	1.13	385

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms85℃) (120Hz)	ESR (mΩ,20℃) (10KHz)
250（300）	330	30x30	1.33	316
		25x35	1.34	320
		25x40	1.31	316
	470	30x35	1.67	223
	560	30x40	1.91	187
	680	35x35	2.22	155
		30x50	2.29	155
		40x30	2.79	144
	820	35x40	2.55	129
		40x40	3.80	116
	1000	35x50	3.26	106
		40x45	4.33	96
	1200	35x60	3.76	100
		40x50	4.94	80
	1500	40x55	5.29	69
	1800	35x80	4.60	82
		40x60	5.92	58
	2200	40x80	7.33	43
	3900	40x105	7.78	32
	4700	45x105	8.22	29
	5600	50x105	8.63	27
350（400）	120	25x30	0.83	736
	150	25x35	0.99	589
	180	25x40	1.13	492
		30x30	1.11	506
	270	30x35	1.43	346
	330	30x40	1.65	284
		40x30	2.02	277
	390	30x50	1.92	238
		35x35	1.82	259
		40x35	2.33	236
	470	35x40	2.07	216
		40x40	2.69	195
	560	35x50	2.80	180
		40x45	3.04	164
	680	40x50	3.46	136
	820	35x60	3.40	130
		40x55	3.84	114
		40x60	3.99	112
	1000	35x80	3.90	104
	1200	40x80	4.95	78
	1800	40x105	6.14	54
	2700	45x105	7.00	42
	3300	50x105	7.54	36
400(450)	100	25x30	0.77	943
	120	25x35	0.90	785
	150	30x30	1.04	645
	150	25x40	1.06	630
	180	30x35	1.20	536
	220	30x35	1.31	400
		30x40	1.41	440
	270	35x35	1.61	376
		40x30	1.85	284
	330	35x35	1.73	320
		30x50	1.82	299
		35x40	1.84	309
		40x35	2.29	252
	390	35x50	2.19	226
		40x40	2.62	203
	470	35x45	2.40	246
		35x50	2.62	223
		40x40	2.74	156

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series: PA
Teapo Series: PA

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms85℃) (120Hz)	ESR (mΩ,20℃) (10KHz)
400 (450)	470	40x45	3.00	168
	560	35x50	2.57	180
		35x60	3.01	184
		40x50	3.41	141
	680	35x60	2.90	142
		40x60	3.99	114
	820	35x80	3.70	127
	1000	35x80	3.98	77
		40x80	5.00	78
	1500	40x105	5.79	68
	2200	45x105	6.56	53
	2700	50x105	7.11	45
450（500）	68	25x30	0.69	1135
	100	25x35	0.88	777
	120	30x30	1.00	663
		25x40	1.01	648
	150	25x40	1.12	524
		30x30	1.10	543
		30x35	1.17	531
	180	30x40	1.36	443
	220	35x35	1.56	379
		30x50	1.61	362
		40x30	1.77	311

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms85℃) (120Hz)	ESR (mΩ,20℃) (10KHz)
450（500）	270	30x50	1.76	301
		35x35	1.68	322
		35x40	1.78	311
		40x35	2.07	259
	330	30x50	1.91	253
		35x40	2.20	242
		35x50	2.41	253
		40x40	2.47	210
	390	35x50	2.60	166
		40x45	2.70	177
	470	35x50	2.43	155
		35x60	2.95	185
		40x50	3.08	147
	560	35x50	2.70	172
		40x60	3.56	121
	680	35x80	3.61	131
	820	40x80	4.47	83
	1000	40x80	4.95	75
		40x70	4.42	93
	1200	40x105	5.57	70
	1500	40x105	5.77	62
	1800	45x105	6.27	55
	2200	50x105	6.81	47

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

JAMICON Snap-in Type Aluminium Electrolytic Capacitors TEAPO

Jamicon Series：HT
Teapo Series：LJ Long Life Series

600V LINE UP



■ Endurance:105℃ 3000 hours
■ Recommended Applications： Smoothing circuit, TV/Monitor,Adapter, SMPS
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃ -40 ~ +105℃ -25~ +105℃
Rated Voltage Range	10 ~ 100VDC 160 ~500VDC DC＞500V
Rated Capacitance Range	560 ~ 68000 μF 56~ 2200 μF 47~ 470 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	DC≤500V $I=\sqrt{3}$ CV DC＞500V I=0.02CVor 3mA whichever is greater (After rated voltage applied for 5minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)

Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)

WV	10~16	25	35	50		63		80~100	160~400	420~450	500~600
Capacitance	-	-	-	≤6800	≥8200	≤6800	≥8200	-	-	-	-
tan δ	0.5	0.4	0.35	0.3	0.35	0.25	0.35	0.25	0.15	0.20	0.25

Low Temperature Stability Impedance Ratio (MAX)

Measurement frequency : 120Hz

Rated voltage(V)	10~16	25	35	50~63	80~100	160~400	420~450	500~600
Z-25℃ / Z+20℃	4	3	3	3	3	4	8	8
Z-40℃ / Z+20℃	15	10	8	6	6	-	-	-

Endurance


After applying rated voltage with rated Ripple current for 3000hrs at 105℃,
the capacitor shall meet the following requirement.

Capacitance change	Within ± 20% of initial value
D.F. (tan δ)	Not more than 200% of specified valu
Leakage current	Not more than the specified value

Shelf Life

The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

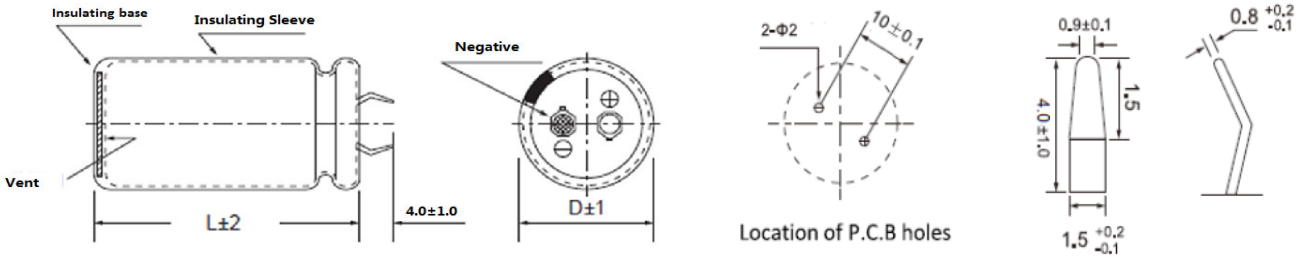

※When the code 11~12 of part number is S1, the terminal length of standard capacitor is 4.0±1.0mm, and when it is SA, the terminal length of standard capacitor is 5.8±1.0mm.

■ Multiplier for Ripple Current

Frequency(Hz)	50	60	120	1K	10K~100K
6.3~100V	0.88	0.90	1.00	1.20	1.30
160~250V	0.85	0.88	1.00	1.30	1.50
315~450V	0.88	0.90	1.00	1.35	1.45
500~550V	0.70	0.72	1.00	1.30	1.40

Jamicon Series：HT
Teapo Series：LJ

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms105℃) (120Hz)	ESR (Ω,20℃) (120Hz)
10(13)	10000	22x25	1.80	0.066
	12000	22x30	2.05	0.055
		25x25	2.05	0.055
	15000	22x35	2.45	0.044
		25x30	2.45	0.044
		3025	2.55	0.044
	18000	22x40	2.94	0.037
		25x30	2.80	0.037
		30x30	3.11	0.037
	22000	22x45	3.24	0.030
		25x35	3.15	0.030
		30x30	3.28	0.030
		35x25	3.37	0.030
	27000	25x40	3.50	0.025
		30x35	3.67	0.025
		35x30	3.78	0.025
	33000	25x45	4.00	0.020
		30x40	4.20	0.020
		35x30	4.08	0.020
	39000	25x50	4.45	0.017
		30x45	4.67	0.017
		35x35	4.63	0.017
	47000	35x40	4.90	0.014
	56000	35x45	5.50	0.012
	68000	30x50	6.05	0.010
16(20)	6800	22x25	1.80	0.098
	8200	22x30	2.05	0.081
		25x25	2.05	0.081
	10000	22x35	2.45	0.066
		25x30	2.45	0.066
	12000	22x40	2.73	0.055
		25x30	2.60	0.055
		30x25	2.68	0.055
	15000	22x45	2.99	0.044
		25x35	2.90	0.044
		30x30	3.02	0.044
	18000	22x50	3.43	0.037
		25x40	3.33	0.037
		30x30	3.30	0.037
		35x25	3.37	0.037
	22000	25x45	3.70	0.030
		30x35	3.70	0.030
		35x30	3.81	0.030
	27000	30x40	4.15	0.025
		35x35	4.27	0.025
	33000	30x50	4.65	0.020
		35x40	4.65	0.020
	39000	35x45	5.25	0.017
	47000	35x50	5.80	0.014
25(32)	3900	22x25	1.50	0.136
	4700	22x30	1.80	0.113
	5600	22x30	1.95	0.095
		25x25	1.95	0.095
	6800	22x35	2.20	0.078
		25x30	2.20	0.078
	8200	22x40	2.47	0.065
		25x35	2.50	0.065
		30x25	2.45	0.065
	10000	22x45	2.75	0.053
		25x40	2.80	0.053
		30x30	2.75	0.053
	12000	22x50	3.13	0.044

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms105℃) (120Hz)	ESR (Ω,20℃) (120Hz)
25(32)	12000	25x45	3.22	0.044
		30x35	3.19	0.044
		35x25	3.10	0.044
	15000	25x50	3.43	0.035
		30x40	3.47	0.035
		35x30	3.40	0.035
	18000	30x45	3.94	0.029
		35x35	3.90	0.029
	22000	30x50	4.30	0.024
		35x40	4.30	0.024
	27000	35x45	4.85	0.020
35(44)	2700	22x25	1.45	0.172
	3300	22x30	1.60	0.141
	3900	22x30	1.80	0.119
	4700	22x35	2.23	0.099
		25x25	2.10	0.099
	5600	22x40	2.41	0.083
		25x30	2.30	0.083
		30x25	2.37	0.083
	6800	22x45	2.68	0.068
		25x35	2.60	0.068
		30x30	2.70	0.068
	8200	22x50	3.02	0.057
		25x40	2.93	0.057
		30x30	2.90	0.057
		35x25	2.96	0.057
	10000	25x45	3.20	0.046
		30x35	3.20	0.046
		35x30	3.30	0.046
	12000	25x50	3.64	0.039
		30x40	3.67	0.039
		35x30	3.60	0.039
	15000	30x45	4.04	0.031
		35x35	4.00	0.031
	18000	35x40	4.60	0.026
	22000	35x50	5.10	0.021
50(63)	1500	22x25	1.25	0.265
	1800	22x30	1.45	0.221
	2200	22x30	1.60	0.181
		25x25	1.60	0.181
	2700	22x35	1.80	0.147
		25x30	1.80	0.147
	3300	22x40	2.05	0.121
		25x30	1.95	0.121
		30x25	2.01	0.121
	3900	22x45	2.27	0.102
		25x35	2.20	0.102
		30x30	2.29	0.102
	4700	22x50	2.50	0.085
		25x40	2.42	0.085
		30x30	2.40	0.085
		35x25	2.45	0.085
	5600	25x45	2.70	0.071
		30x35	2.70	0.071
		35x30	2.78	0.071
	6800	30x40	3.06	0.059
		35x30	3.00	0.059
	8200	30x45	3.38	0.057
		35x35	3.35	0.057
	10000	35x40	3.70	0.046
	12000	35x50	4.20	0.039
63(79)	1200	22x25	1.25	0.276

Jamicon Series：HT
Teapo Series：LJ

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms105℃) (120Hz)	ESR (Ω,20℃) (120Hz)
63(79)	1500	22x30	1.45	0.221
		22x25	1.45	0.221
	1800	22x35	1.60	0.184
		25x30	1.60	0.184
	2200	22x40	1.89	0.151
		25x30	1.80	0.151
		30x25	1.85	0.151
	2700	22x45	2.06	0.123
		25x35	2.00	0.123
		30x30	2.08	0.123
	3300	25x40	2.32	0.100
		30x30	2.30	0.100
		35x25	2.35	0.100
	3900	25x45	2.55	0.085
		30x35	2.55	0.085
		35x30	2.63	0.085
	4700	25x50	2.83	0.071
		30x40	2.86	0.071
		35x30	2.80	0.071
	5600	30x45	3.18	0.059
		35x35	3.15	0.059
	6800	30x50	3.50	0.049
		35x40	3.50	0.049
	8200	35x45	3.90	0.057
80(100)	820	22x25	1.20	0.404
	1000	22x30	1.35	0.332
	1200	22x35	1.59	0.276
		25x25	1.50	0.276
	1500	22x40	1.78	0.221
		25x30	1.70	0.221
		30x25	1.75	0.221
	1800	22x45	2.01	0.184
		25x35	1.95	0.184
		30x30	2.03	0.184
	2200	25x40	2.17	0.151
		30x30	2.15	0.151
		35x25	2.19	0.151
	2700	25x45	2.45	0.123
		30x35	2.45	0.123
		35x30	2.52	0.123
	3300	30x40	2.75	0.100
		35x35	2.83	0.100
	3900	30x45	3.13	0.085
		35x35	3.10	0.085
	4700	35x40	3.40	0.071
	5600	35x50	3.80	0.059
100(125)	560	22x25	1.20	0.592
	680	22x30	1.35	0.488
	820	22x30	1.50	0.404
		25x25	1.50	0.404
	1000	22x35	1.70	0.332
		25x30	1.70	0.332
	1200	22x40	1.97	0.276
		25x35	1.99	0.276
		30x25	1.95	0.276
	1500	22x45	2.15	0.221
		25x40	2.19	0.221
		30x30	2.15	0.221
		35x25	2.21	0.221
	1800	25x45	2.45	0.184
		30x35	2.45	0.184
		35x30	2.52	0.184

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms105℃) (120Hz)	ESR (Ω,20℃) (120Hz)
100(125)	2200	25x50	2.75	0.151
		30x40	2.75	0.151
		35x35	2.86	0.151
	2700	30x45	3.08	0.123
		35x35	3.05	0.123
	3300	30x50	3.45	0.100
		35x40	3.45	0.100
	3900	35x45	3.90	0.085
	4700	35x50	4.30	0.071
160(200)	270	22x25	0.85	0.737
	330	22x30	1.00	0.603
	390	22x30	1.15	0.510
		25x25	1.15	0.510
	470	22x35	1.30	0.423
		25x30	1.30	0.423
	560	22x40	1.57	0.355
		25x30	1.50	0.355
		30x25	1.54	0.355
	680	22x45	1.75	0.293
		25x35	1.70	0.293
		30x30	1.77	0.293
	820	22x50	2.03	0.243
		25x40	1.97	0.243
		30x30	1.95	0.243
		35x25	1.99	0.243
	1000	25x45	2.15	0.199
		30x35	2.15	0.199
		35x30	2.21	0.199
	1200	30x40	2.45	0.166
		35x35	2.52	0.166
	1500	30x50	2.75	0.133
		35x40	2.75	0.133
	1800	35x45	3.00	0.111
	2200	35x50	3.50	0.090
180(225)	270	22x25	0.85	0.737
	330	22x30	1.10	0.603
	390	22x30	1.20	0.510
		25x25	1.25	0.510
	470	22x35	1.36	0.423
		25x30	1.40	0.423
	560	22x40	1.56	0.355
		25x30	1.55	0.355
		30x25	1.60	0.355
	680	22x45	1.75	0.293
		25x35	1.67	0.293
		30x30	1.80	0.293
		35x25	1.84	0.293
	820	25x40	1.95	0.243
		30x30	1.96	0.243
		35x25	2.05	0.243
	1000	25x50	2.27	0.199
		30x35	2.20	0.199
		35x30	2.25	0.199
	1200	30x40	2.50	0.166
		35x30	2.40	0.166
	1500	35x35	2.78	0.133
	1800	35x40	3.17	0.111
200(250)	220	22x25	0.85	0.904
	270	22x25	0.94	0.737
	330	22x30	1.15	0.603
		25x25	1.15	0.603
	390	22x35	1.31	0.510

Jamicon Series：HT
Teapo Series：LJ

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms105℃) (120Hz)	ESR (Ω,20℃) (120Hz)
200(250)	390	25x25	1.22	0.510
	470	22x40	1.52	0.423
		25x30	1.48	0.423
		30x25	1.50	0.423
	560	22x45	1.75	0.355
		25x35	1.68	0.355
		30x30	1.76	0.355
	680	25x40	1.96	0.293
		30x30	1.94	0.293
		35x25	1.98	0.293
	820	25x45	2.27	0.243
		30x35	2.26	0.243
		35x30	2.33	0.243
	1000	30x40	2.65	0.199
		35x30	2.58	0.199
	1200	30x45	3.05	0.166
		35x35	3.00	0.166
	1500	35x45	3.58	0.133
250(300)	150	22x25	0.75	1.326
	180	22x30	0.85	1.105
	220	22x30	1.00	0.904
		25x25	1.00	0.904
	270	22x35	1.22	0.737
		25x25	1.15	0.737
	330	22x35	1.25	0.603
		25x30	1.30	0.603
	390	22x40	1.42	0.510
		25x35	1.48	0.510
		30x25	1.45	0.510
		35x25	1.59	0.510
	470	22x50	1.78	0.423
		25x40	1.75	0.423
		30x30	1.72	0.423
		35x25	1.78	0.423
	560	25x40	1.80	0.355
		30x35	1.89	0.355
		35x25	1.85	0.355
	680	25x50	2.14	0.293
		30x35	2.05	0.293
		35x30	2.12	0.293
	820	30x45	2.49	0.243
		35x35	2.45	0.243
	1000	30x50	2.80	0.199
		35x40	2.86	0.199
	1200	35x45	3.29	0.166
315(365)	82	22x25	0.55	2.426
	100	22x30	0.65	1.989
	120	22x30	0.75	1.658
		25x25	0.75	1.658
	150	22x35	0.80	1.326
		25x30	0.80	1.326
	180	22x40	1.01	1.105
		25x35	1.02	1.105
		30x25	1.00	1.105
	220	22x45	1.10	0.904
		25x40	1.12	0.904
		30x30	1.10	0.904
	270	25x45	1.25	0.737
		30x35	1.25	0.737
	330	25x50	1.53	0.603
		30x40	1.53	0.603
		35x30	1.50	0.603

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms105℃) (120Hz)	ESR (Ω,20℃) (120Hz)
315(365)	390	30x45	1.71	0.510
		35x30	1.60	0.510
	470	30x50	1.85	0.423
		35x35	1.75	0.423
	560	35x40	2.00	0.355
	680	35x45	2.20	0.293
350(400)	82	22x25	0.60	2.426
	100	22x30	0.70	1.989
		25x25	0.70	1.989
	120	22x30	0.74	1.658
		25x25	0.75	1.658
	150	22x35	0.78	1.326
		25x30	0.82	1.326
		30x25	0.85	1.326
	180	22x40	0.96	1.105
		25x35	1.05	1.105
		30x30	1.05	1.105
	220	22x50	1.16	0.904
		25x40	1.10	0.904
		30x30	1.10	0.904
		35x25	1.15	0.904
	270	25x45	1.22	0.737
		30x35	1.25	0.737
		35x30	1.30	0.737
	330	30x40	1.30	0.603
		35x30	1.35	0.603
	390	30x45	1.50	0.510
		35x35	1.55	0.510
	470	35x40	1.72	0.423
	560	35x45	2.05	0.355
400(450)	68	22x25	0.55	2.926
	82	22x30	0.65	2.426
		25x25	0.65	2.426
	100	22x30	0.75	1.989
		25x25	0.75	1.989
	120	22x35	0.84	1.658
		25x30	0.85	1.658
		30x25	0.87	1.658
	150	22x40	0.90	1.326
		25x35	0.90	1.326
		30x30	0.94	1.326
		35x25	0.96	1.326
	180	22x45	1.05	1.105
		25x40	1.06	1.105
		30x30	1.10	1.105
		35x25	1.12	1.105
	220	25x45	1.20	0.904
		30x35	1.20	0.904
		35x30	1.24	0.904
	270	25x50	1.36	0.737
		30x40	1.38	0.737
		35x30	1.35	0.737
	330	30x45	1.58	0.603
		35x35	1.56	0.603
	390	35x40	1.79	0.510
		35x50	1.87	0.510
	470	35x45	2.07	0.423
450(500)	56	22x25	0.55	4.737
	68	22x30	0.65	3.901
	82	22x35	0.80	3.235
		25x25	0.75	3.235
	100	22x40	0.89	2.653

Jamicon Series：HT
Teapo Series：LJ

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms105℃) (120Hz)	ESR (Ω,20℃) (120Hz)
450(500)	100	25x30	0.85	2.653
	120	22x45	0.95	2.210
		25x35	0.92	2.210
		30x25	0.90	2.210
	150	22x50	1.14	1.768
		25x40	1.11	1.768
		30x30	1.10	1.768
	180	25x45	1.25	1.474
		30x35	1.24	1.474
		35x25	1.20	1.474
	220	25x50	1.36	1.206
		30x40	1.38	1.206
		35x30	1.35	1.206
	270	30x45	1.51	0.982
		35x35	1.50	0.982
	330	30x50	1.70	0.804
		35x40	1.70	0.804
	390	35x45	1.90	0.680
	470	35x50	2.10	0.564
500(550)	47	22x25	0.51	7.055
	56	22x30	0.58	5.921
	68	25x25	0.65	4.876
	82	22x35	0.72	4.044
		25x30	0.74	4.044
	100	22x45	0.83	3.316
		30x25	0.82	3.316
	120	22x50	0.93	2.763
		25x35	0.93	2.763
		30x30	0.91	2.763
	150	25x45	1.08	2.210
		30x35	1.04	2.210
		35x25	0.99	2.210
500(550)	180	25x50	1.20	1.842
	180	30x40	1.17	1.842
		35x30	1.10	1.842
	220	30x45	1.33	1.507
		35x35	1.23	1.507
	270	30x50	1.50	1.228
		35x40	1.42	1.228
	330	35x45	1.60	1.005
	390	35x50	1.78	0.850
	470	35x60	2.03	0.705

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms105℃) (120Hz)	ESR (Ω,20℃) (120Hz)
550(600)	47	22x30	0.55	7.055
	56	22x35	0.64	5.921
	68	25x30	0.71	4.876
	82	22x40	0.82	4.044
		25x35	0.83	4.044
		30x25	0.81	4.044
	100	22x45	0.87	3.316
		30x30	0.88	3.316
	120	22x50	1.00	2.763
		25x40	0.97	2.763
		30x35	1.02	2.763
		35x25	0.98	2.763
	150	25x45	1.15	2.210
		30x40	1.21	2.210
		35x30	1.18	2.210
	180	30x45	1.26	1.842
		35x35	1.24	1.842
	220	30x50	1.45	1.507
		35x40	1.45	1.507
	270	35x45	1.68	1.228
	330	35x50	1.95	1.005
	390	35x60	2.12	0.850
600(650)	100	30x30	0.83	3.979
		30x25	0.85	3.979
	120	30x35	0.93	3.316
	150	30x40	1.07	2.652
		35x30	1.06	2.652
	180	30x45	1.20	2.210
		30x50	1.22	2.210
		35x35	1.18	2.210
	220	30x60	1.40	1.808
		35x45	1.38	1.808
	270	35x50	1.56	1.474
	330	35x60	1.79	1.206
	470	35x75	2.20	0.846

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：HB
Teapo Series：GB Long Life&Large Capacitance



■ Endurance: 105℃ 3000hours
■ Recommended Applications : Applying to switching power supply and other industry/ commercial field
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40~+105℃ -25~+105℃
Rated Voltage Range	16 ~500VDC DC≧500V
Rated Capacitance Range	390 ~ 250000 μF 390 ~ 1500 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I = $3\sqrt{CV}$. (After rated voltage applied for 5 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)

Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)

WV		16	25	35	50	63		80		100	160~400	450	500
Capacitance		—	—	—	—	≦27,000	＞27,000	≦15,000	＞15,000	—	—	—	—
tan δ	35Φ	0.80	0.60	0.50	0.40	0.35	0.40	0.25	0.30	0.25	0.15	0.20	0.25
	40Φ	0.90	0.70	0.60	0.45	0.35	0.40	0.25	0.30	0.25	0.15	0.20	0.25
	45Φ	1.00	0.80	0.70	0.50	0.35	0.40	0.25	0.30	0.25	0.15	0.20	0.25
	50Φ	1.20	1.00	0.75	0.55	0.35	0.40	0.25	0.30	0.25	0.15	0.20	0.25

Low Temperature Stability Impedance Ratio (MAX)

Measurement frequency : 120Hz

WV	16~100	160~250	350~450	500
Z-25℃ / Z+20℃	4	6	8	8
Z-40℃ / Z+20℃	15	—	—	—

Endurance

After applying rated voltage with rated Ripple current for 3000hrs at 105℃,when the capacitors are restored to 20℃, the capacitor shall meet the following requirements.


Capacitance change	Within ± 20% of initial value
D.F. (tan δ)	Not more than200% of specified value
Leakage current	initial specified value or less

Shelf Life


The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]


Code 11~13：S1G(35Φ)

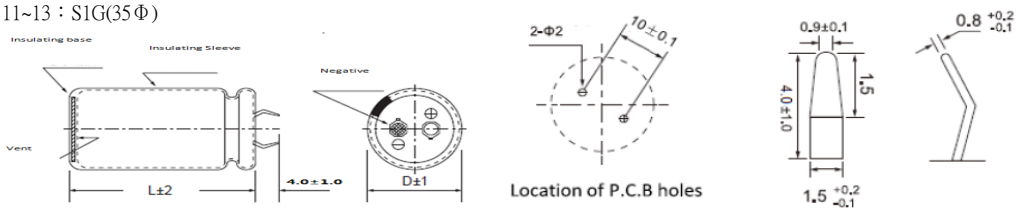

Code 11~13：L4A(35~45Φ)

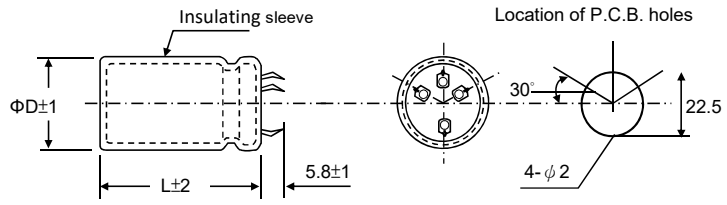

Code 11~13：L5A(50Φ)

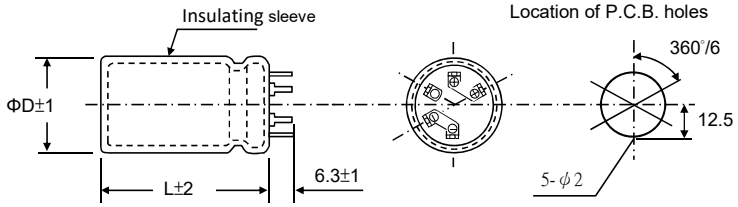

※When the code 11~12 of part number is S1, the terminal length of standard capacitor is 4.0±1.0mm, and when it is SA, the terminal length of standard capacitor is 5.8±1.0mm.

■ Multiplier for Ripple Current

Freq. (Hz)	60	120	400	1K	10K
≦100V	0.80	1.00	1.10	1.20	1.20
>100V	0.80	1.00	1.10	1.30	1.40

Jamicon Series：HB
Teapo Series：GB

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
16 (20)	68000	35x60	0.80	6.85
		40x51	0.90	7.39
	82000	35x80	0.80	8.16
		40x61	0.90	7.70
	100000	35x80	0.80	8.15
		40x71	0.90	8.67
		45x50	1.00	7.59
	120000	35x100	0.80	8.84
		40x81	0.90	9.11
		45x60	1.00	8.54
		50x50	1.20	9.23
	150000	40x101	0.90	10.07
		45x70	1.00	9.18
		50x60	1.20	10.19
	180000	45x80	1.00	10.06
		50x80	1.20	11.47
	220000	45x100	1.00	10.84
		50x90	1.20	12.01
	250000	50x100	1.20	12.67
25 (32)	39000	35x60	0.60	6.26
		40x51	0.70	6.09
	47000	35x60	0.60	6.57
		40x51	0.70	6.59
	56000	35x80	0.60	7.78
		40x61	0.70	7.22
		45x50	0.80	6.65
	68000	35x90	0.60	8.62
		40x81	0.70	9.00
		45x60	0.80	7.91
		50x50	1.00	8.57
	82000	35x100	0.60	8.94
		40x81	0.70	8.99
		45x70	0.80	8.43
		50x50	1.00	8.71
	100000	40x101	0.70	9.87
		45x80	0.80	9.86
		50x60	1.00	9.95
	120000	45x100	0.80	10x74
		50x80	1.00	11.28
	180000	50x100	1.00	12.47
35 (44)	27000	35x60	0.50	5.71
		40x51	0.60	5.70
	33000	35x70	0.50	6.46
		40x61	0.60	6.80
	39000	35x80	0.50	6.78
		40x71	0.60	7.27
		45x50	0.70	6.20
	47000	35x100	0.50	8.23
		40x81	0.60	8.09
		45x60	0.70	7.03
		50x50	0.75	8.53
	56000	40x91	0.60	8.88
		45x70	0.70	8.56
		50x60	0.75	9.31
	68000	40x101	0.60	9.28
		45x80	0.70	9.56
		50x80	0.75	11.14
	82000	45x100	0.70	11.07
		50x90	0.75	11.33
	100000	50x100	0.75	11.92
50 (63)	15000	35x60	0.40	5.17
		40x51	0.45	4.91

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
50 (63)	18000	35x60	0.40	5.44
		40x61	0.45	6.03
	22000	35x80	0.40	6.83
		40x61	0.45	5.64
	27000	35x80	0.40	6.30
		40x71	0.45	6.68
		45x60	0.50	6.30
	33000	35x100	0.40	7.33
		40x81	0.45	6.4
		45x70	0.50	7.44
		50x60	0.55	8.67
	39000	40x101	0.45	7.26
		45x80	0.50	6.62
		50x70	0.55	9.31
	47000	45x90	0.50	7.66
		50x80	0.55	9.52
	56000	45x100	0.50	8.76
		50x90	0.55	9.94
	68000	50x100	0.55	10.91
63 (79)	12000	35x60	0.35	4.74
		40x51	0.35	4.78
	15000	35x70	0.35	5.2
		40x51	0.35	4.90
	18000	35x80	0.35	6.05
		40x61	0.35	5.79
		45x50	0.35	5.70
		50x50	0.35	6.07
	22000	35x90	0.35	7.06
		40x81	0.35	7.24
		45x60	0.35	6.80
		50x60	0.35	7.23
	27000	40x91	0.35	8.07
		45x70	0.35	7.68
		50x60	0.35	7.64
	33000	40x101	0.40	7.91
		45x80	0.40	7.61
		50x80	0.40	8.08
	39000	45x100	0.40	8.66
		50x90	0.40	8.76
	47000	50x100	0.40	9.51
80 (100)	8200	35x60	0.25	4.64
		40x51	0.25	4.67
	10000	35x70	0.25	5.48
		40x61	0.25	5.57
		45x50	0.25	5.48
	12000	35x80	0.25	6.11
		40x71	0.25	6.24
		45x60	0.25	6.21
		50x50	0.25	6.13
	15000	35x100	0.25	6.91
		40x81	0.25	6.76
		45x70	0.25	6.77
		50x60	0.25	6.74
	18000	40x101	0.30	7.11
		45x80	0.30	6.83
		50x80	0.30	7.25
	22000	45x100	0.30	7.92
		50x90	0.30	8.02
	27000	50x100	0.30	8.82
100 (125)	4700	35x60	0.25	4.10
		40x51	0.25	4.13
	5600	35x70	0.25	4.62

Jamicon Series：HB
Teapo Series：GB

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
100 (125)	5600	40x61	0.25	4.69
	6800	35x80	0.25	5.40
		40x61	0.25	5.17
		45x50	0.25	5.09
	8200	35x90	0.25	5.56
		40x81	0.25	6.18
		45x60	0.25	5.80
		50x60	0.25	6.65
	10000	35x100	0.25	6.45
		40x81	0.25	6.83
		45x70	0.25	6.84
		50x60	0.25	7.08
	12000	40x101	0.25	7.63
		45x80	0.25	7.33
		50x70	0.25	7.66
	15000	45x100	0.25	8.30
		50x60	0.25	8.34
	18000	50x100	0.25	9.24
160 (200)	2200	35x60	0.15	3.36
		40x51	0.15	3.39
	2700	35x70	0.15	3.83
		40x61	0.15	3.89
		45x50	0.15	3.83
	3300	35x80	0.15	4.32
		40x71	0.15	4.41
		45x60	0.15	4.39
		50x50	0.15	4.33
	3900	35x90	0.15	4.95
		40x81	0.15	5.08
		45x70	0.15	5.09
		50x60	0.15	5.07
	4700	35x100	0.15	5.23
		40x91	0.15	5.39
		45x80	0.15	5.43
		50x70	0.15	5.44
	5600	40x101	0.15	5.61
		45x90	0.15	5.68
		50x80	0.15	5.72
	6800	45x100	0.15	5.90
		50x90	0.15	5.97
	8200	50x100	0.15	6.11
180 (225)	1800	35x60	0.15	3.27
		40x51	0.15	3.30
	2200	35x70	0.15	3.87
		40x61	0.15	3.93
		45x50	0.15	3.88
	2700	35x80	0.15	4.39
		40x71	0.15	4.49
		45x60	0.15	4.46
		50x50	0.15	4.41
	3300	35x90	0.15	4.74
		40x81	0.15	4.87
		45x70	0.15	4.88
		50x60	0.15	4.86
	3900	35x100	0.15	5.20
		40x91	0.15	5.35
		45x80	0.15	5.40
		50x70	0.15	5.41
	4700	40x101	0.15	5.65
		45x90	0.15	5.72
		50x80	0.15	5.76
	5600	45x100	0.15	5.95

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
180 (225)	5600	50x90	0.15	6.02
	6800	50x100	0.15	6.26
200 (250)	1800	35x60	0.15	3.27
		40x51	0.15	3.06
	2200	35x80	0.15	4.11
		40x61	0.15	3.65
		45x50	0.15	3.60
	2700	35x80	0.15	4.56
		40x81	0.15	4.58
		45x60	0.15	4.3
	3300	35x90	0.15	4.93
		40x71	0.15	4.78
		45x70	0.15	5.08
		50x50	0.15	5.23
	3900	35x100	0.15	6.06
		40x81	0.15	5.51
		45x80	0.15	5.85
		50x60	0.15	5.92
	4700	40x101	0.15	6.42
		45x90	0.15	6.50
		50x80	0.15	7.07
	5600	45x100	0.15	7.44
		50x90	0.15	7.83
	6800	50x100	0.15	9.04
250 (300)	1500	35x70	0.15	3.2
	1800	35x80	0.15	3.72
		40x61	0.15	3.56
		45x50	0.15	3.50
	2200	35x80	0.15	3.97
		40x81	0.15	4.29
		45x60	0.15	4.03
		50x50	0.15	4.42
	2700	35x100	0.15	4.86
		40x81	0.15	4.76
		45x70	0.15	4.77
		50x60	0.15	5.10
	3300	40x101	0.15	5.59
		45x80	0.15	5.38
		50x70	0.15	5.81
	3900	45x90	0.15	6.16
		50x80	0.15	6.21
	4700	45x100	0.15	6.82
		50x100	0.15	7.22
350 (400)	820	35x60	0.15	2.76
		40x51	0.15	2.78
	1000	35x70	0.15	2.05
		40x61	0.15	2.08
		45x50	0.15	2.05
		50x50	0.15	3.58
	1200	35x80	0.15	3.26
		40x71	0.15	3.32
		45x60	0.15	3.32
		50x50	0.15	3.70
	1500	35x100	0.15	4.57
		40x81	0.15	3.81
		45x70	0.15	3.82
		50x60	0.15	4.19
	1800	40x101	0.15	5.24
		45x80	0.15	5.04
		50x80	0.15	5.84
	2200	45x100	0.15	6.15
		50x100	0.15	6.72

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：HB
Teapo Series：GB

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
400 (450)	680	35x60	0.15	2.37
		40x51	0.15	2.39
	820	35x70	0.15	2.79
		40x61	0.15	2.83
		45x50	0.15	2.79
		50x50	0.15	3.42
	1000	35x80	0.15	3.27
		40x61	0.15	3.13
		45x60	0.15	3.32
		50x60	0.15	4.07
	1200	35x100	0.15	3.96
		40x81	0.15	3.88
		45x70	0.15	3.88
		50x60	0.15	4.45
	1500	40x101	0.15	4.79
		45x80	0.15	4.60
		50x80	0.15	5.62
	1800	45x100	0.15	5.57
		50x100	0.15	6.8
450 (500)	470	35x60	0.20	2.03
	560	35x70	0.20	2.37
		40x51	0.20	2.23
	680	35x80	0.20	2.78
		40x61	0.20	2.66
		45x50	0.20	2.62
		50x50	0.20	3.03
	820	35x90	0.20	3.22
		40x71	0.20	3.11
		45x60	0.20	3.10
		50x60	0.20	3.59
	1000	40x91	0.20	3.84

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
450 (500)	1000	45x70	0.20	3.65
		50x70	0.20	4.22
	1200	40x101	0.20	4.41
		45x80	0.20	4.24
		50x80	0.20	4.90
	1500	45x90	0.20	4.65
		50x90	0.20	6.12
	1800	45x100	0.20	5.24
		50x100	0.20	6.04
500(550)	390	35x60	0.25	1.60
		40x51	0.25	1.61
	470	35x70	0.25	1.88
		40x61	0.25	1.91
		45x50	0.25	1.88
	560	35x80	0.25	2.18
		40x71	0.25	2.23
		45x60	0.25	2.22
		50x50	0.25	2.32
	680	35x100	0.25	2.66
		40x81	0.25	2.60
		45x70	0.25	2.61
		50x60	0.25	2.75
	820	40x101	0.25	2.88
		45x80	0.25	3.04
		50x70	0.25	3.22
	1000	45x90	0.25	3.53
		50x80	0.25	3.77
	1200	45x100	0.25	4.06
		50x90	0.25	4.35
	1500	50x100	0.25	4.74

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

JAMICON Snap-in Type Aluminium Electrolytic Capacitors TEAPO

Jamicon Series：HL
Teapo Series：LQ Long Life Series

550V LINE UP




■ Endurance: 105℃ 5000 hours
■ Recommended Applications : Smoothing circuit, TV/Monitor,Adapter, SMPS
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃ -25 ~ +105℃
Rated Voltage Range	160 ~ 500VDC DC＞500V
Rated Capacitance Range	56 ~ 2200 μF 100 ~ 470 μF
Capacitance Tolerance	± 20 % at 120Hz , 20
Leakage Current (20℃)	DC≦500V $I=\beta\sqrt{CV}$ DC＞500V I=0.02CVor 3mA whichever is greater (After rated voltage applied for 5 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV 160~400 420~450 500~550 Capacitance - - - tan δ 0.15 0.20 0.25
Low Temperature Stability Impedance Ratio (MAX)	Measurement frequency : 120Hz Rated voltage(V) 160~400 420~450 500~550 Z-25℃ / Z+20℃ 4 8 8 Z-40℃ / Z+20℃ - - -
Endurance	After applying rated voltage with rated Ripple current for 5000hrs at 105℃,when the capacitors are restored to 20℃, the capacitor shall meet the following requirement. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

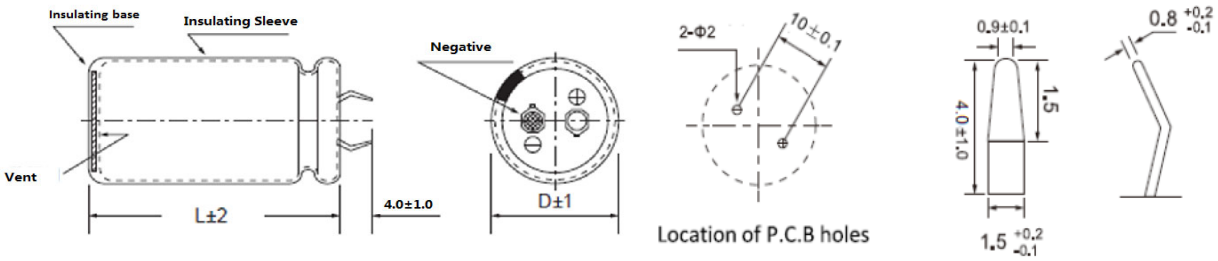

※When the code 11~12 of part number is S1, the terminal length of standard capacitor is 4.0±1.0mm, and when it is SA, the terminal length of standard capacitor is 5.8±1.0mm.

■ Multiplier for Ripple Current

Freq. (Hz)	50	60	120	1K	10k~100k
6.3~100V	0.88	0.90	1.00	1.20	1.30
160~250V	0.85	0.88	1.00	1.30	1.50
315~450	0.88	0.90	1.00	1.35	1.45
500~550	0.70	0.72	1.00	1.30	1.40

Jamicon Series：HL
Teapo Series：LQ

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms105℃) (120Hz)	ESR (Ω,20℃) (120Hz)
160(200)	270	22x25	0.85	0.737
	330	22x30	1.00	0.603
	390	22x30	1.15	0.51
		25x25	1.15	0.51
	470	22x35	1.30	0.423
		25x30	1.30	0.423
	560	22x40	1.57	0.355
		25x30	1.50	0.355
		30x25	1.54	0.355
	680	22x45	1.75	0.293
		25x35	1.70	0.293
		30x30	1.77	0.293
	820	22x50	2.03	0.243
		25x40	1.97	0.243
		30x30	1.95	0.243
		35x25	1.99	0.243
	1000	25x45	2.15	0.199
		30x35	2.15	0.199
		35x30	2.21	0.199
	1200	30x40	2.45	0.166
		35x35	2.52	0.166
	1500	30x50	2.75	0.133
		35x40	2.75	0.133
	1800	35x45	3.00	0.111
	2200	35x50	3.50	0.09
180(225)	270	22x25	0.85	0.737
	330	22x30	1.10	0.603
	390	22x35	1.32	0.51
		25x25	1.25	0.51
	470	22x40	1.47	0.423
		25x30	1.40	0.423
	560	22x45	1.70	0.355
		25x35	1.63	0.355
		30x25	1.60	0.355
	680	22x50	1.87	0.293
		25x40	1.82	0.293
		30x30	1.80	0.293
		35x25	1.84	0.293
	820	25x45	2.05	0.243
		30x35	2.05	0.243
		35x30	2.11	0.243
	1000	25x50	2.27	0.199
		30x40	2.29	0.199
		35x30	2.25	0.199
	1200	30x45	2.57	0.166
		35x35	2.55	0.166
	1500	35x40	2.85	0.133
	1800	35x50	3.10	0.111
200(250)	220	22x25	0.85	0.905
	270	22x30	1.02	0.737
	330	22x30	1.15	0.603
		25x25	1.15	0.603
	390	22x35	1.31	0.510
		25x30	1.32	0.510
	470	22x40	1.52	0.423
		25x30	1.45	0.423
		30x25	1.50	0.423
	560	22x45	1.75	0.355
		25x35	1.68	0.355
		30x30	1.76	0.355
	680	25x40	1.96	0.293
		30x30	1.94	0.293

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms105℃) (120Hz)	ESR (Ω,20℃) (120Hz)
200(250)	680	35x25	1.98	0.293
	820	25x45	2.27	0.243
		30x35	2.26	0.243
		35x30	2.33	0.243
	1000	30x45	2.78	0.199
		35x35	2.74	0.199
	1200	30x50	3.19	0.166
		35x40	3.17	0.166
	1500	35x45	3.72	0.133
250（300）	150	22x25	0.75	1.330
	180	22x25	0.76	1.110
	220	22x30	1.00	0.905
		25x25	1.00	0.905
	270	22x30	1.05	0.737
		25x25	1.15	0.737
	330	22x35	1.22	0.603
		25x30	1.30	0.603
	390	22x40	1.37	0.510
		25x35	1.48	0.510
		30x30	1.45	0.510
		35x25	1.59	0.510
	470	22x50	1.78	0.423
		25x40	1.75	0.423
		30x30	1.72	0.423
		35x25	1.66	0.423
	560	25x40	1.80	0.355
		30x35	1.89	0.3550
		35x30	1.94	0.3550
	680	25x50	2.10	0.2930
		30x40	2.15	0.293
		35x30	2.10	0.293
	820	30x45	2.49	0.243
		35x35	2.45	0.243
	1000	30x50	2.80	0.199
		35x40	2.86	0.199
	1200	35x50	3.44	0.166
315(365)	82	22x25	0.55	2.426
	100	22x30	0.65	1.989
	120	22x30	0.75	1.658
		25x25	0.75	1.658
	150	22x35	0.80	1.326
		25x30	0.80	1.326
	180	22x40	1.01	1.105
		25x35	1.02	1.105
		30x25	1.00	1.105
	220	22x45	1.10	0.905
		25x40	1.12	0.905
		30x30	1.10	0.905
	270	25x45	1.25	0.737
		30x35	1.25	0.737
	330	25x50	1.53	0.603
		30x40	1.53	0.603
		35x30	1.50	0.603
	390	30x45	1.71	0.510
		35x30	1.60	0.510
	470	30x50	1.85	0.423
		35x35	1.75	0.423
	560	35x40	2.00	0.355
	680	35x45	2.20	0.293
350(400)	82	22x25	0.60	2.426
	100	22x30	0.70	1.989
		25x25	0.70	1.989

Jamicon Series：HL
Teapo Series：LQ

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms105℃) (120Hz)	ESR (Ω,20℃) (120Hz)
350(400)	120	22x35	0.80	1.658
		25x30	0.80	1.658
	150	22x40	0.86	1.326
		25x35	0.87	1.326
		30x25	0.85	1.326
	180	22x45	1.05	1.105
		25x40	1.07	1.105
		30x30	1.05	1.105
	220	22x50	1.16	0.905
		25x45	1.20	0.905
		30x35	1.18	0.905
		30x25	1.15	0.905
	270	25x50	1.31	0.737
		30x40	1.33	0.737
		35x30	1.30	0.737
	330	30x45	1.46	0.603
		35x35	1.45	0.603
	390	30x50	1.65	0.510
		35x40	1.65	0.510
	470	35x45	1.85	0.423
	560	35x50	2.10	0.355
400(450)	68	22x25	0.55	2.926
	82	22x30	0.65	2.426
		25x25	0.65	2.426
	100	22x30	0.70	1.989
		25x25	0.70	1.989
	120	22x35	0.80	1.658
		25x30	0.85	1.658
		30x25	0.87	1.658
	150	22x40	0.85	1.326
		25x35	0.90	1.326
		30x30	0.94	1.326
		35x25	0.96	1.326
	180	22x45	1.05	1.105
		25x40	1.11	1.105
		30x30	1.10	1.105
		35x25	1.12	1.105
	220	25x40	1.15	0.905
		30x35	1.20	0.905
		35x30	1.24	0.905
	270	25x45	1.29	0.737
		30x40	1.38	0.737
		35x30	1.35	0.737
	330	30x40	1.51	0.603
		35x35	1.56	0.603
	390	30x45	1.72	0.510
		35x40	1.75	0.510
	470	35x40	1.97	0.423
450(500)	56	22x25	0.55	4.737
	68	22x30	0.65	3.901

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms105℃) (120Hz)	ESR (Ω,20℃) (120Hz)
450(500)	82	22x30	0.70	3.235
		25x25	0.75	3.235
	100	22x35	0.80	2.653
		25x30	0.85	2.653
	120	22x40	0.88	2.210
		25x35	0.92	2.210
		30x25	0.90	2.210
	150	22x50	1.14	1.768
		25x40	1.11	1.768
		30x30	1.10	1.768
	180	25x45	1.25	1.474
		30x35	1.25	1.474
		35x25	1.20	1.474
	220	25x50	1.36	1.206
		30x40	1.38	1.206
		35x30	1.35	1.206
	270	30x45	1.51	0.982
		35x35	1.50	0.982
	330	30x50	1.70	0.804
		35x40	1.70	0.804
	390	35x45	1.90	0.680
	470	35x50	2.10	0.564
500(550)	100	30x25	0.82	3.316
	120	30x30	0.91	2.763
		35x25	0.88	2.763
	150	30x35	1.04	2.210
	180	30x40	1.17	1.842
		35x30	1.10	1.842
	220	30x45	1.33	1.507
		35x35	1.23	1.507
	270	30x50	1.50	1.228
		35x40	1.42	1.228
	330	35x45	1.60	1.005
	390	35x50	1.78	0.850
	470	35x60	2.03	0.705
550(600)	100	22x40	0.83	3.316
		30x30	0.84	3.316
	120	22x45	0.95	2.763
		30x35	1.00	2.763
	150	22x50	1.12	2.210
		30x40	1.15	2.210
		35x30	1.12	2.210
	180	30x45	1.23	1.842
		35x35	1.21	1.842
	220	30x50	1.42	1.507
		35x40	1.41	1.507
	270	35x45	1.56	1.228
	330	35x50	1.81	1.005
	390	35x60	2.12	0.850

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：GQ
Teapo Series：GQ Long life High Ripple Series




■ Endurance:105℃ 5000hours LK
■ Recommended applications: Suitable for switch-mode power supplies and other industrial/inverter frequency cc
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃
Rated Voltage Range	400~ 450VDC
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I = $\sqrt{3}$ CV. (After rated voltage applied for 5 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 400 / 420 / 450 tan δ: 0.20 / 0.20 / 0.20
Low Temperature Stability Impedance Ratio (MAX)	Measurement frequency : 120Hz Rated voltage(V): 400 / 420 / 450 Z-25℃ / Z+20℃: 8 / 8 / 8 Z-40℃ / Z+20℃: 14 / 14 / 14
Endurance	After applying rated voltage with rated ripple current for 5000 hours at 105℃ , the capacitors shall meet the following requirements. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than200% of specified value Leakage current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 85℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

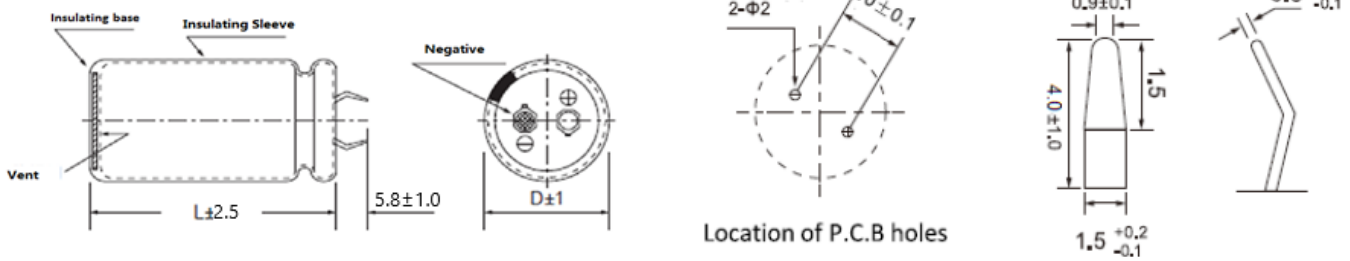

※When the code 11~12 of part number is S1, the terminal length of standard capacitor is 4.0±1.0mm, and when it is SA, the terminal length of standard capacitor is 5.8±1.0mm.

■ Multiplier for Ripple Current

Freq. (Hz)	50	120	300	1K	10K	50K
400~450V	0.72	1.00	1.12	1.25	1.35	1.40

Jamicon Series：GQ
Teapo Series：GQ

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms 85℃) (120Hz)
400 (450)	280	30x35	0.15	2.31
	350	30x41	0.15	2.67
	400	30x46	0.15	2.92
	400	35x35	0.15	2.92
	470	30x51	0.15	3.23
	500	35x41	0.15	3.39
	510	30x54	0.15	3.41
	570	30x59	0.15	3.66
	570	35x46	0.15	3.70
	670	35x51	0.15	4.12
	720	35x54	0.15	4.32
	810	35x59	0.15	4.66
420 (470)	240	30x35	0.20	2.07
	300	30x41	0.20	2.39
	340	30x46	0.20	2.60
	350	35x35	0.20	2.57
	410	30x51	0.20	2.92
	430	35x41	0.20	2.95
	440	30x54	0.20	3.06
	490	30x59	0.20	3.28
	490	35x46	0.20	3.22
	580	35x51	0.20	3.60
	620	35x54	0.20	3.76
	700	35x59	0.20	4.06

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms 85℃) (120Hz)
450（500）	220	30x35	0.20	1.98
	280	30x41	0.20	2.31
	310	30x46	0.20	2.48
	320	35x35	0.20	2.45
	370	30x51	0.20	2.77
	400	30x54	0.20	2.91
	400	35x41	0.20	2.85
	450	30x59	0.20	3.14
	450	35x46	0.20	3.09
	530	35x51	0.20	3.44
	570	35x54	0.20	3.61
	640	35x59	0.20	3.89

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：HF
Teapo Series：LK Long Life Series




■ Endurance: 105℃ 7000hours
■ Recommended Applications: Smoothing circuit, TV/Monitor,Adapter, SMPS
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃
Rated Voltage Range	160 ~ 450VDC
Rated Capacitance Range	39 ~ 2200 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I = $3\sqrt{CV}$. (After rated voltage applied for 5 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 160 / 180 / 200 / 250 / 315 / 350 / 400 / 450 tan δ: 0.15 / 0.15 / 0.15 / 0.15 / 0.20 / 0.20 / 0.20 / 0.20
Low Temperature Stability Impedance Ratio (MAX)	Measurement frequency : 120Hz Rated voltage(V): 160~400 / 450 Z-25℃ / Z+20℃: 4 / 8 Z-40℃ / Z+20℃: — / —
Endurance	After applying rated voltage with rated Ripple current for 7000hrs at 105℃,when the capacitors are restored to 20℃, the capacitor shall meet the following requirement. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

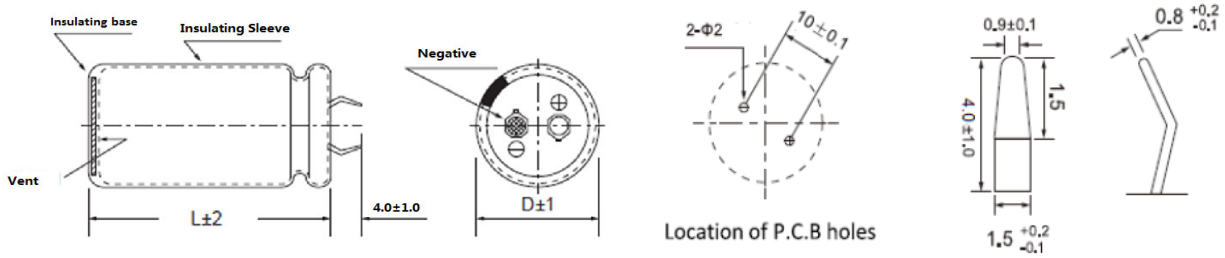

※When the code 11~12 of part number is S1, the terminal length of standard capacitor is 4.0±1.0mm, and when it is SA, the terminal length of standard capacitor is 5.8±1.0mm.

■ Multiplier for Ripple Current

Freq. (Hz)	60(50)	120	500	1K	≧10K
160~250WV	0.80	1.00	1.20	1.30	1.40
315~450WV	0.80	1.00	1.20	1.30	1.40

Jamicon Series：HF
Teapo Series：LK

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
160(200)	270	22x25	0.15	1.10
	330	22x25	0.15	1.20
	390	22x30	0.15	1.30
		25x25	0.15	1.30
	470	22x35	0.15	1.40
		25x30	0.15	1.40
	560	22x40	0.15	1.60
		25x30	0.15	1.56
		30x25	0.15	1.54
	680	22x45	0.15	1.90
		25x35	0.15	1.83
		30x30	0.15	1.82
	820	22x25	0.15	2.00
		25x40	0.15	2.02
		30x30	0.15	2.00
	1000	25x45	0.15	2.35
		30x35	0.15	2.35
		35x30	0.15	2.30
	1200	25x50	0.15	2.56
		30x40	0.15	2.57
		35x35	0.15	2.53
	1500	30x45	0.15	2.90
		35x35	0.15	2.86
	1800	30x50	0.15	3.32
		35x40	0.15	3.30
	2200	35x45	0.15	3.64
180(225)	220	22x25	0.15	1.00
	270	22x25	0.15	1.10
	330	22x30	0.15	1.20
		25x25	0.15	1.20
	390	22x30	0.15	1.30
		25x25	0.15	1.30
	470	22x35	0.15	1.40
		25x30	0.15	1.40
		30x25	0.15	1.40
	560	22x40	0.15	1.50
		25x35	0.15	1.50
		30x25	0.15	1.50
	680	22x45	0.15	1.70
		25x35	0.15	1.70
		30x30	0.15	1.70
	820	25x40	0.15	2.00
		30x35	0.15	2.00
		35x30	0.15	2.00
	1000	25x50	0.15	2.20
		30x35	0.15	2.20
		35x30	0.15	2.20
	1200	30x40	0.15	2.40
		35x35	0.15	2.40
	1500	30x50	0.15	2.70
		35x40	0.15	2.70
	1800	35x45	0.15	2.90
	2200	35x50	0.150	3.10
200(250)	220	22x25	0.15	1.00
	270	22x30	0.15	1.10
		25x25	0.15	1.10
	330	22x30	0.15	1.20
		25x25	0.15	1.20
	390	22x35	0.15	1.30
		25x30	0.15	1.31
		30x25	0.15	1.30
	470	22x40	0.15	1.51

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
200(250)	470	25x35	0.15	1.46
		30x25	0.15	1.49
	560	22x45	0.15	1.65
		25x35	0.15	1.59
		30x30	0.15	1.66
	680	22x50	0.15	1.82
		25x40	0.15	1.86
		30x30	0.15	1.83
	820	25x45	0.15	2.04
		30x35	0.15	2.03
		35x30	0.15	2.00
	1000	30x40	0.15	2.26
		35x35	0.15	2.34
	1200	30x45	0.15	2.46
		35x40	0.15	2.70
	1500	35x50	0.15	3.15
250(300)	180	22x30	0.15	0.90
		25x25	0.15	0.90
	220	22x30	0.15	1.00
		25x25	0.15	1.00
	270	22x35	0.15	1.10
		25x30	0.15	1.10
		30x25	0.15	1.10
	330	22x40	0.15	1.27
		25x30	0.15	1.21
		30x25	0.15	1.20
	390	22x45	0.15	1.39
		25x35	0.15	1.34
		30x30	0.15	1.30
	470	22x50	0.15	1.60
		25x40	0.15	1.56
		30x35	0.15	1.56
		35x30	0.15	1.61
	560	25x45	0.15	1.70
		30x35	0.15	1.62
		35x30	0.15	1.67
	680	25x50	0.15	1.97
		30x40	0.15	1.98
		35x35	0.15	1.93
	820	30x45	0.15	2.17
		35x35	0.15	2.14
	1000	30x50	0.15	2.61
		35x40	0.15	2.50
	1200	35x45	0.15	2.99
315(365)	82	22x25	0.20	0.64
	100	22x30	0.20	0.69
	120	22x30	0.20	0.75
		25x25	0.20	0.75
	150	22x35	0.20	0.82
		25x30	0.20	0.82
		30x25	0.20	0.82
	180	22x40	0.20	0.90
		25x30	0.20	0.90
		30x25	0.20	0.90
	220	22x45	0.20	1.05
		25x35	0.20	1.05
		30x30	0.20	1.05
	270	25x40	0.20	1.20
		30x35	0.20	1.20
		35x30	0.20	1.20
	330	25x50	0.20	1.35
		30x40	0.20	1.35

Jamicon Series：HF
Teapo Series：LK

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
315(365)	330	35x30	0.20	1.35
	390	30x40	0.20	1.50
		35x35	0.20	1.50
	470	30x45	0.20	1.60
		35x40	0.20	1.60
	560	35x45	0.20	1.70
	680	35x50	0.20	1.90
350(400)	82	22x25	0.20	0.64
	100	22x30	0.20	0.69
		25x25	0.20	0.69
	120	22x35	0.20	0.75
		25x30	0.20	0.75
	150	22x40	0.20	0.85
		25x30	0.20	0.89
		30x25	0.20	0.88
	180	22x45	0.20	1.02
		25x35	0.20	0.98
		30x30	0.20	1.03
	220	22x50	0.20	1.09
		25x40	0.20	1.06
		30x30	0.20	1.10
	270	25x45	0.20	1.24
		30x35	0.20	1.30
		35x30	0.20	1.27
	330	30x40	0.20	1.44
		35x35	0.20	1.44
	390	30x45	0.20	1.57
		35x35	0.20	1.63
	470	30x50	0.20	1.90
		35x40	0.20	1.89
	560	35x50	0.20	2.15
400(450)	56	22x25	0.20	0.51
	68	22x30	0.20	0.57
		25x25	0.20	0.57
	82	22x30	0.20	0.66
		25x25	0.20	0.64
	100	22x35	0.20	0.69
		25x30	0.20	0.69
	120	22x40	0.20	0.80
		25x30	0.20	0.80

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
400(450)	120	30x25	0.20	0.80
	150	22x45	0.20	0.94
		25x35	0.20	0.91
		30x30	0.20	0.95
	180	22x50	0.20	0.98
		25x40	0.20	0.96
		30x30	0.20	1.09
		35x25	0.20	0.97
	220	25x45	0.20	1.27
		30x35	0.20	1.17
		35x30	0.20	1.31
	270	30x40	0.20	1.37
		35x35	0.20	1.35
	330	30x45	0.20	1.60
		35x40	0.20	1.58
	390	35x45	0.20	1.80
	470	35x50	0.20	2.07
450(500)	39	22x25	0.20	0.40
	47	22x30	0.20	0.46
	56	22x35	0.20	0.54
		25x25	0.20	0.52
	68	22x40	0.20	0.58
		25x30	0.20	0.58
	82	22x45	0.20	0.72
		25x35	0.20	0.69
		30x25	0.20	0.68
	100	22x50	0.20	0.78
		25x40	0.20	0.74
		30x30	0.20	0.75
	120	25x45	0.20	0.86
		30x30	0.20	0.85
	150	25x50	0.20	1.02
		30x40	0.20	1.02
		35x30	0.20	1.00
	180	30x45	0.20	1.18
		35x35	0.20	1.29
	220	30x50	0.20	1.24
		35x40	0.20	1.24
	270	35x45	0.20	1.40
	330	35x50	0.20	1.60

JAMICON Snap-in Type Aluminium Electrolytic Capacitors TEAPO

Jamicon Series：HX
Teapo Series：LP Long Life Series




■ Endurance: 105℃ 10000hours
■ Recommended Applications: Smoothing circuit, TV/Monitor,Adapter, SMPS
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃
Rated Voltage Range	200 ~ 450VDC
Rated Capacitance Range	39 ~ 1500 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I = $3\sqrt{CV}$. (After rated voltage applied for 5 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 200 / 250 / 400 / 450 tan δ: 0.15 / 0.15 / 0.20 / 0.20
Low Temperature Stability Impedance Ratio (MAX)	Measurement frequency : 120Hz Rated voltage(V): 200~400 / 450 Z-25℃ / Z+20℃: 4 / 8 Z-40℃ / Z+20℃: — / —
Endurance	After applying rated voltage with rated Ripple current for 10000hrs at 105℃,when the capacitors are restored to 20℃, the capacitor shall meet the following requirement. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 250% of specified value Leakage current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

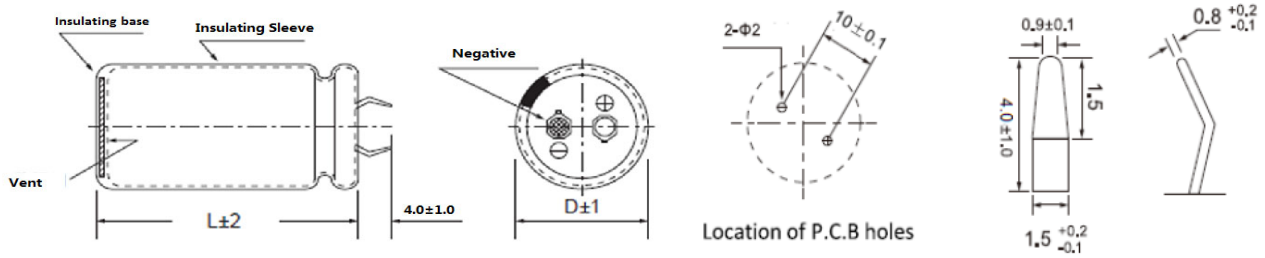

※When the code 11~12 of part number is S1, the terminal length of standard capacitor is 4.0±1.0mm, and when it is SA, the terminal length of standard capacitor is 5.8±1.0mm.

■ Multiplier for Ripple Current

Freq. (Hz)	60(50)	120	500	1K	≧10K
200~250WV	0.80	1.00	1.20	1.30	1.45
315~450WV	0.80	1.00	1.20	1.25	1.40

Jamicon Series：HX
Teapo Series：LP

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
200(250)	220	22x25	0.15	1.00
	270	22x30	0.15	1.10
		25x25	0.15	1.10
	330	22x30	0.15	1.20
		25x25	0.15	1.20
	390	22x35	0.15	1.30
		25x30	0.15	1.30
		30x25	0.15	1.30
	470	22x40	0.15	1.40
		25x35	0.15	1.40
		30x30	0.15	1.40
	560	22x45	0.15	1.50
		25x35	0.15	1.50
		30x30	0.15	1.50
	680	25x40	0.15	1.70
		30x35	0.15	1.70
	820	25x50	0.15	2.00
		30x40	0.15	2.00
		35x30	0.15	2.00
	1000	30x45	0.15	2.22
		35x35	0.15	2.20
	1200	30x50	0.15	2.53
		35x40	0.15	2.44
	1500	35x50	0.15	2.50
250(300)	180	22x30	0.15	0.90
		25x25	0.15	0.90
	220	22x35	0.15	1.00
		25x30	0.15	1.00
	270	22x40	0.15	1.10
		25x30	0.15	1.10
		30x25	0.15	1.10
	330	22x45	0.15	1.20
		25x35	0.15	1.20
		30x30	0.15	1.20
	390	22x50	0.15	1.32
		25x40	0.15	1.23
		30x30	0.15	1.30
	470	25x45	0.15	1.42
		30x35	0.15	1.40
		35x30	0.15	1.40
	560	25x50	0.15	1.50
		30x40	0.15	1.58
		35x35	0.15	1.60
	680	30x45	0.15	1.83
		35x40	0.15	1.85
	820	30x50	0.15	2.09
		35x45	0.15	2.11
	1000	35x50	0.15	2.43

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
400(450)	56	22x25	0.20	0.51
	68	22x30	0.20	0.56
		25x25	0.20	0.56
	82	22x35	0.20	0.64
		25x25	0.20	0.64
	100	22x35	0.20	0.69
		25x30	0.20	0.69
	120	22x40	0.20	0.75
		25x35	0.20	0.75
		30x25	0.20	0.75
	150	22x50	0.20	0.82
		25x40	0.20	0.82
		30x30	0.20	0.82
	180	25x45	0.20	0.90
		30x35	0.20	0.90
		35x25	0.20	0.90
	220	25x50	0.20	1.00
		30x40	0.20	1.00
		35x30	0.20	1.00
	270	30x45	0.20	1.15
		35x35	0.20	1.11
	330	30x50	0.20	1.32
		35x40	0.20	1.28
	390	35x45	0.20	1.45
	470	35x50	0.20	1.66
450(500)	39	22x25	0.20	0.37
	47	22x30	0.20	0.40
	56	22x35	0.20	0.47
		25x25	0.20	0.47
	68	22x40	0.20	0.53
		25x30	0.20	0.53
	82	22x45	0.20	0.56
		25x35	0.20	0.56
		30x25	0.20	0.56
	100	22x50	0.20	0.67
		25x40	0.20	0.64
		30x30	0.20	0.64
	120	25x45	0.20	0.72
		30x30	0.20	0.72
	150	25x50	0.20	0.83
		30x40	0.20	0.81
		35x30	0.20	0.79
	180	30x45	0.20	0.93
		35x35	0.20	0.91
	220	30x50	0.20	1.07
		35x40	0.20	1.05
	270	35x45	0.20	1.21
	330	35x50	0.20	1.38

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：QA
Teapo Series：QA

High Temperature Long Life Series



■ Endurance : 105℃ 6000~9000 hour

■ Recommended applications: smooth circuit, switching power supply, photovoltaic industry, large-scale electronic equipment an

■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃
Rated Voltage Range	35~ 450VDC
Rated Capacitance Range	47~ 120000 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I≤ $3\sqrt{CV}$ (After rated voltage applied for 5minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)

Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)

WV	25		50		63		100		200~250	350	400	450
CAP.	≤3300	≥4700	≤6800	≥8200	≤6800	≥8200	≤3300	≥47000	-	-	-	-
tan δ	0.35	0.4	0.3	0.35	0.25	0.35	0.25	0.3	0.15	0.15	0.2	0.2

Low Temperature Stability Impedance Ratio (MAX)

Measurement frequency : 120Hz

Rated voltage(V)	25	50	63	100	200~250	350	400~450
Z-25℃ / Z+20℃	3	3	3	2	4	4	8
Z-40℃ / Z+20℃	10	8	6	5	5	10	15

Endurance

In an environment of 105 ℃, the rated ripple current is superimposed within the range of rated voltage, and the service life is shown in the following table:

ΦDiameter(mm)	Life(h)
25	6000
30	7000
35	8000
40~50	9000


When the temperature is restored to 20 ℃ for measurement, the following requirements should be met.

Capacitance change	Within ± 10% of initial value
DF. (tan δ)	Not more than 200% of specified value
Leakage current	initial specified value or less
ESR.	Up to 200% of initial value

Shelf Life

After 1000 hours of storage at 105 ℃, the temperature should be restored to 20 ℃ for measurement. Before measurement, pre experimental treatment should be conducted (refer to Article 4.1 of JIS C 5101-4 for treatment methods). The capacitor should meet

■ Dimensions [mm]

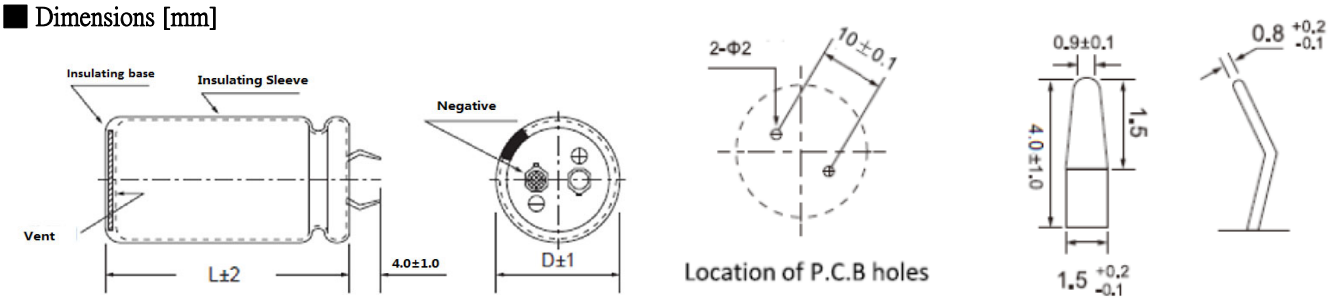

※When the code 11~12 of part number is S1, the terminal length of standard capacitor is 4.0±1.0mm, and when it is SA, the terminal length of standard capacitor is 5.8±1.0mm.

■ Ripple current frequency correction co

Freq. (Hz)	50	60	120	1K	10K~100K
35~63V	0.8	0.85	1.00	1.10	1.20
100~250	0.78	0.80	1.00	1.30	1.45
300~450V	0.75	0.78	1.00	1.30	1.40

■ temperature coefficient

nbient temperatu	40	60	70	85	105
coefficient	2.5	2.20	2.00	1.80	1.00

Jamicon Series：QA
Teapo Series：QA

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms105℃) (120Hz)	ESR (mΩ,20℃) (10KHz)
25(32)	8200	25x30	1.97	157
	10000	25x35	2.33	126
	12000	25x40	2.74	105
		30x30	2.18	138
	15000	30x35	2.65	109
	18000	30x40	3.04	91
	22000	35x35	2.91	104
	27000	30x50	3.94	64
		35x40	3.34	86
		40x30	4.03	69
	33000	35x50	4.32	63
		40x35	4.83	62
	39000	35x50	4.32	62
		40x40	5.57	49
	47000	40x50	7.30	37
	56000	40x55	7.51	35
	82000	40x80	11.06	20
	120000	40x105	13.41	17
63(79)	2200	25x30	1.69	180
	3300	25x35	2.01	133
	3900	25x40	2.36	111
		30x30	1.88	154
	4700	30x35	2.28	123
	5600	30x40	2.61	102
		40x30	3.82	90
	6800	30x50	3.39	75
		35x35	2.50	119
		40x35	4.18	81
	8200	30x50	3.33	35
		35x40	2.87	99
		40x40	5.01	64
	10000	35x50	3.71	72
		40x45	5.69	53
	12000	40x50	6.50	44
	15000	40x60	7.81	34
	22000	40x80	9.70	24
	33000	40x105	12.01	17
100(125)	820	25x30	1.39	220
	1000	25x35	1.65	177
	1200	25x40	1.93	147
	1200	30x30	1.57	191
	1500	30x35	1.90	151
	1800	30x40	2.18	125
	2200	30x50	2.82	94
		35x35	2.10	142
		40x30	3.58	110
	2700	35x40	2.41	118
		40x40	4.92	80
	3300	35x50	3.12	86
		40x45	5.59	66
	3900	40x50	6.41	55
	4700	40x55	6.67	50
	5600	40x60	7.46	42
	8200	40x80	9.28	29
	10000	40x105	11.33	21
200(250)	270	25x30	1.01	377
	390	25x35	1.24	271
	470	25x40	1.45	224
		30x30	1.24	270
	560	30x35	1.50	219
	680	30x40	1.72	181
		40x30	2.97	158

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms105℃) (120Hz)	ESR (mΩ,20℃) (10KHz)
200(250)	820	30x50	2.18	140
		35x35	1.70	191
		40x35	3.35	137
	1000	35x40	1.95	158
		40x40	3.92	110
	1200	35x50	2.50	119
		40x45	4.50	91
	1500	40x50	5.13	74
	1800	40x60	6.10	60
	2700	40x80	7.62	41
	3900	40x105	7.90	34
	5600	45x105	8.68	28
	6800	50x105	9.08	26
250(300)	220	25x30	0.93	405
	270	25x35	1.10	327
	330	25x40	1.29	268
		30x30	1.13	312
	390	30x35	1.36	256
	470	30x40	1.56	212
		40x30	2.59	193
	560	30x50	1.96	168
		35x35	1.57	217
		40x35	3.05	166
	680	35x40	1.80	179
		40x40	3.49	134
	820	35x50	3.12	137
		40x45	4.01	111
	1000	35x60	3.61	125
		40x50	4.58	92
	1200	40x55	4.93	80
	1500	35x80	4.43	90
	1800	40x80	6.77	50
	2700	40x105	7.05	42
	3900	45x105	7.90	33
	4700	50x105	8.36	30
350(400)	120	25x30	0.88	562
	150	25x35	1.04	449
	180	25x40	1.20	374
		30x30	1.17	410
	220	30x35	1.36	332
	270	30x40	1.59	272
		40x30	1.97	291
	330	35x35	1.79	260
	390	30x50	2.02	191
		35x40	2.02	218
		40x40	2.64	203
	470	35x50	2.72	170
		40x45	3.00	168
	560	35x50	2.57	155
		35x60	3.11	155
		40x50	3.41	141
	680	40x60	3.99	114
	820	35x80	3.82	102
	1000	40x80	5.00	78
	1500	40x105	6.00	68
	2200	45x105	6.79	53
	2700	50x105	7.34	45
400(450)	100	25x30	0.85	788
	120	25x35	1.00	653
	150	25x40	1.17	524
		30x30	1.14	456
	180	30x35	1.31	463

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：QA
Teapo Series：QA

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms105℃) (120Hz)	ESR (mΩ,20℃) (10KHz)
400(450)	220	30x40	1.54	379
		40x30	1.88	320
	270	35x35	1.73	322
		40x35	2.21	266
	330	30x50	1.98	258
		35x40	1.98	266
		40x40	2.56	216
	390	35x50	2.64	221
		40x45	2.88	182
	470	35x45	2.50	192
		35x50	2.51	192
		35x60	3.04	185
		40x50	3.28	151
	560	40x55	3.62	130
	680	35x80	3.72	131
		40x60	4.08	107
	1000	40x80	4.85	73
	1200	40x105	5.76	70
	1800	45x105	6.48	55
	2200	50x105	7.02	47
450(500)	47	25x30	0.66	1392
	56	25x35	0.76	1168
	68	25x40	0.88	963
		30x30	0.87	194

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	Ripple current (A/rms105℃) (120Hz)	ESR (mΩ,20℃) (10KHz)
450(500)	82	30x35	1.01	807
	100	30x40	1.18	663
	120	35x35	1.36	565
	150	30x50	1.54	446
		35x40	1.57	454
		40x30	1.73	447
	180	35x50	1.88	377
		40x35	2.01	374
	220	35x50	2.28	315
		40x40	2.34	306
	270	40x50	2.80	248
	330	35x50	2.53	140
		35x60	2.91	198
		40x55	3.14	204
	390	40x60	3.50	174
	470	35x60	3.00	148
		35x80	3.51	138
	560	40x80	4.32	122
	820	40x80	4.30	98
		40x105	5.34	85
	1200	45x105	5.84	71
	1500	50x105	6.44	59

Jamicon Series：HM
Teapo Series：LS Downsized、Low profile Series




■ Endurance: 105℃ 2000 hours
■ Recommended Applications : Applying to switching power supply and other industry/ commercial field
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-25 ~ +105℃
Rated Voltage Range	160 ~ 450VDC
Rated Capacitance Range	100 ~ 3300 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I = $3\sqrt{CV}$. (After rated voltage applied for 5 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV 160 200 220~400 420 450 tan δ 0.15 0.15 0.15 0.20 0.20
Low Temperature Stability Impedance Ratio (MAX)	Measurement frequency : 120Hz WV 160 200 220~400 420 450 Z-25℃ / Z+20℃ 4 4 4 8 8
Endurance	After applying rated voltage with rated Ripple current for 2000hrs at 105℃,the capacitor shall meet the following requirements. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: initial specified value or less
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

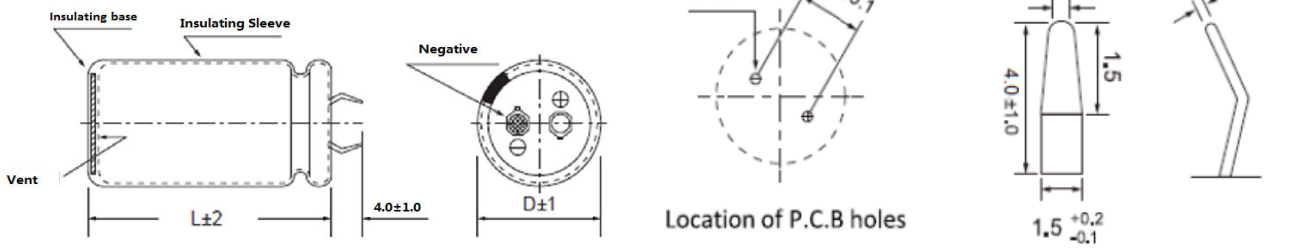

※When the code 11~12 of part number is S1, the terminal length of standard capacitor is 4.0±1.0mm, and when it is SA, the terminal length of standard capacitor is 5.8±1.0mm.

■ Multiplier for Ripple Current

Freq. (Hz)	50	60	120	1K	10K~100K
160~250V	0.85	0.88	1.00	1.30	1.50
315~450V	0.88	0.9	1.00	1.35	1.45

Jamicon Series：HM
Teapo Series：LS

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
160 (200)	560	22x30	0.15	1.48
	680	22x35	0.15	1.65
		25x30	0.15	1.70
	820	22x40	0.15	2.00
		25x35	0.15	2.00
	1000	22x50	0.15	2.10
		25x40	0.15	2.20
		30x30	0.15	2.20
	1200	25x45	0.15	2.30
		30x35	0.15	2.30
	1500	25x50	0.15	2.50
		30x40	0.15	2.50
		35x30	0.15	2.50
	1800	30x45	0.15	2.70
		35x35	0.15	2.55
	2200	30x50	0.15	2.90
		35x45	0.15	2.90
	2700	35x50	0.15	3.25
	3300	35x60	0.15	3.87
200 (250)	470	22x30	0.15	1.44
	560	22x35	0.15	1.50
		25x30	0.15	1.51
	680	22x40	0.15	1.84
		25x35	0.15	1.77
	820	22x45	0.15	2.05
		25x40	0.15	1.99
		30x30	0.15	1.96
	1000	25x45	0.15	2.37
		30x35	0.15	2.41
	1200	25x50	0.15	2.54
		30x40	0.15	2.43
		35x30	0.15	2.49
	1500	30x45	0.15	2.57
		35x35	0.15	2.57
	1800	30x50	0.15	2.70
		35x40	0.15	2.82
	2200	35x45	0.15	3.16
	2700	35x55	0.15	3.60
220 (270)	330	22x25	0.15	1.26
	390	22x30	0.15	1.34
	470	22x35	0.15	1.48
		25x30	0.15	1.40
	560	22x40	0.15	1.45
		25x30	0.15	1.45
	680	22x40	0.15	1.49
		25x35	0.15	1.78
		30x30	0.15	1.65
	820	22x50	0.15	1.93
		25x40	0.15	1.93
		30x30	0.15	1.85
		35x25	0.15	1.93
	1000	25x45	0.15	2.15
		30x35	0.15	2.33
		35x30	0.15	2.33
	1200	30x40	0.15	2.50
		35x30	0.15	2.12
	1500	30x45	0.15	2.30
		35x35	0.15	2.25
	1800	35x40	0.15	2.43
	2200	35x50	0.15	2.95
250（300）	390	22x30	0.15	1.15
		25x25	0.15	1.21
250（300）	470	22x35	0.15	1.29
		25x30	0.15	1.36
	560	22x40	0.15	1.40
		25x35	0.15	1.50
		30x25	0.15	1.44
	680	22x45	0.15	1.61
		25x40	0.15	1.73
		30x30	0.15	1.71
	820	25x45	0.15	2.00
		30x35	0.15	2.00
		35x30	0.15	2.00
	1000	25x50	0.15	2.20
		30x40	0.15	2.20
		35x30	0.15	2.00
	1200	30x45	0.15	2.35
		35x35	0.15	2.32
	1500	35x40	0.15	2.32
	1800	35x50	0.15	2.71
400 (450)	120	22x25	0.15	0.63
	180	22x30	0.15	0.80
		25x25	0.15	0.79
	220	22x35	0.15	0.94
		25x30	0.15	0.94
	270	22x40	0.15	1.04
		25x35	0.15	1.06
		30x25	0.15	1.03
	330	22x50	0.15	1.27
		25x40	0.15	1.24
		30x30	0.15	1.22
		35x25	0.15	1.25
	390	25x45	0.15	1.41
		30x35	0.15	1.42
		35x30	0.15	1.55
	470	30x40	0.15	1.55
		35x30	0.15	1.51
	560	30x45	0.15	1.68
		35x35	0.15	1.66
	680	30x50	0.15	1.93
		35x40	0.15	1.92
	820	35x45	0.15	1.91
420(470)	120	22x25	0.20	0.46
	150	22x30	0.20	0.54
		25x25	0.20	0.65
	180	22x35	0.20	0.64
		25x30	0.20	0.64
	220	22x40	0.20	0.80
		25x35	0.20	0.80
		30x25	0.20	0.80
	270	22x50	0.20	1.00
		25x40	0.20	1.00
		30x30	0.20	1.00
	330	25x45	0.20	1.10
		30x35	0.20	1.10
		35x30	0.20	1.10
	390	25x50	0.20	1.20
		30x40	0.20	1.20
		35x30	0.20	1.20
	470	30x45	0.20	1.30
		35x35	0.20	1.30
	560	30x50	0.20	1.60
		35x40	0.20	1.60
	680	35x45	0.20	2.00

Jamicon Series：HM
Teapo Series：LS

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
420(470)	820	35x50	0.20	2.30
450 (500)	100	22x25	0.20	0.54
	120	22x30	0.20	0.63
	150	22x35	0.20	0.76
		25x25	0.20	0.73
	180	22x40	0.20	0.84
		25x30	0.20	0.80
	220	22x45	0.20	0.97
		25x35	0.20	0.94
		30x25	0.20	0.91
	270	22x50	0.20	1.07
		25x40	0.20	1.04

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
450 (500)	270	30x35	0.20	1.10
		35x25	0.20	1.16
	330	25x50	0.20	1.27
		30x35	0.20	1.21
		35x30	0.20	1.25
	390	30x40	0.20	1.39
		35x35	0.20	1.44
	470	30x45	0.20	1.52
		35x35	0.20	1.50
	560	35x40	0.20	1.63
	680	35x50	0.20	1.97

Jamicon Series：LR
Teapo Series：LR Downsized、Low profile Series




■ Endurance: 105℃ 2000 hours
■ Recommended Applications : Applying to switching power supply and other industry/ commercial field
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-25 ~ +105℃
Rated Voltage Range	400 ~ 450VDC
Rated Capacitance Range	120 ~ 1000 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I = $3\sqrt{CV}$. (After rated voltage applied for 5 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV 400 420 450 tan δ 0.15 0.20 0.20
Low Temperature Stability Impedance Ratio (MAX)	Measurement frequency : 120Hz WV 400 420 450 Z-25℃ / Z+20℃ 8 8 8
Endurance	After applying rated voltage with rated Ripple current for 2000hrs at 105℃,the capacitor shall meet the following requirements. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: initial specified value or less
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

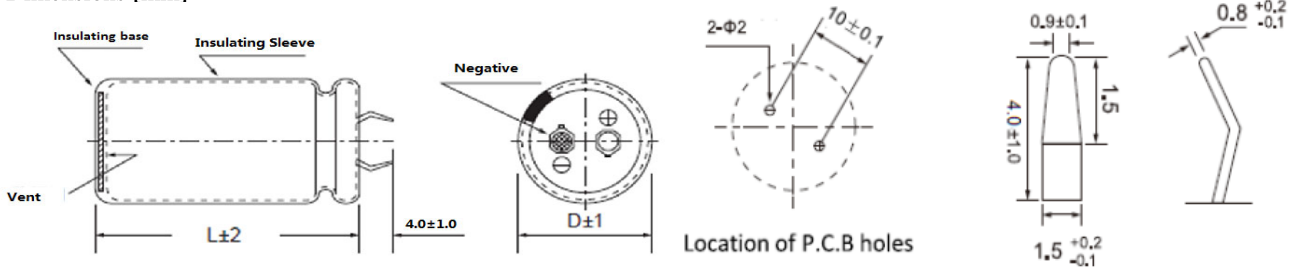

※When the code 11~12 of part number is S1, the terminal length of standard capacitor is 4.0±1.0mm, and when it is SA, the terminal length of standard capacitor is 5.8±1.0mm.

■ Multiplier for Ripple Current

Freq. (Hz)	50	120	300	1K	10K	≧50K
400~450V	0.77	1	1.16	1.30	1.41	1.43

Jamicon Series：LR

Teapo Series：LR

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
400 (450)	150	22x25	0.15	0.57
	180	22x30	0.15	0.68
	220	22x35	0.15	0.80
		25x25	0.15	0.75
	270	22x40	0.15	0.94
		25x30	0.15	0.89
	330	22x45	0.15	1.09
		25x35	0.15	1.05
		30x25	% (120Hz , 20	1.02
	390	22x50	0.15	1.25
		25x40	0.15	1.21
		30x30	0.15	1.20
		35x25	0.15	1.23
	470	25x45	0.15	1.40
		30x35	0.15	1.40
	560	30x40	0.15	1.62
		35x30	0.15	1.58
	680	30x45	0.15	1.87
		35x35	0.15	1.85
	820	35x40	0.15	2.14
	1000	35x50	0.15	2.50
420(470)	150	22x25	0.20	0.50
	180	22x30	0.20	0.59
		25x25	0.20	0.59
	220	22x35	0.20	0.69
	270	22x40	0.20	0.81
		25x30	0.20	0.78
		30x25	0.20	0.80
	330	22x45	0.20	0.95
		25x35	0.20	0.92
	390	25x40	0.20	1.05
		30x30	0.20	1.04

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
420(470)	470	25x50	0.20	1.28
		30x35	0.20	1.22
		35x30	0.20	1.25
	560	30x40	0.20	1.40
		35x35	0.20	1.45
	680	30x50	0.20	1.70
		35x40	0.20	1.69
	820	30x55	0.20	1.95
		35x45	0.20	1.95
	1000	35x50	0.20	2.10
	1200	35x50	0.20	2.30
		35x55	0.20	2.40
450 (500)	120	22x25	0.20	0.55
	180	22x30	0.20	0.72
		25x25	0.20	0.72
	220	22x35	0.20	0.85
		25x30	0.20	0.86
	270	22x45	0.20	1.06
		25x35	0.20	1.02
		30x25	0.20	0.99
	330	22x50	0.20	1.23
		25x40	0.20	1.19
		30x30	0.20	1.18
	390	25x45	0.20	1.37
		30x35	0.20	1.36
		35x30	0.20	1.41
	470	25x50	0.20	1.57
		30x40	0.20	1.58
		35x35	0.20	1.64
	560	30x45	0.20	1.82
		35x40	0.20	1.89
	680	30x50	0.20	2.09
		35x45	0.20	2.16
	820	30x60	0.20	2.49
		35x50	0.20	2.51

Jamicon Series：GG
Teapo Series：GG Downsized、Low profile Series




■ Endurance: 105℃ 2000 hours
■ Recommended applications: Suitable for switch-mode power supplies and other indu High temperature
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-25~ +105℃
Rated Voltage Range	400 ~ 450VDC
Rated Capacitance Range	210 ~ 1500μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	$I = 3\sqrt{CV}$ DC＞500V I=0.02CVor 3mA whichever is greater (After rated voltage applied for 5minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 400 / 420 / 450 tan δ: 0.20 / 0.20 / 0.20
Low Temperature Stability Impedance Ratio (MAX)	Measurement frequency : 120Hz Rated voltage(V): 400 / 420 / 450 Z-25℃ / Z+20℃: 8 / 8 / 8
Endurance	After applying rated voltage with rated Ripple current for 2000hrs at 105℃,when the capacitors are restored to 20℃, the capacitor shall meet the following requirements. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified valu Leakage current: initial specified value or less
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

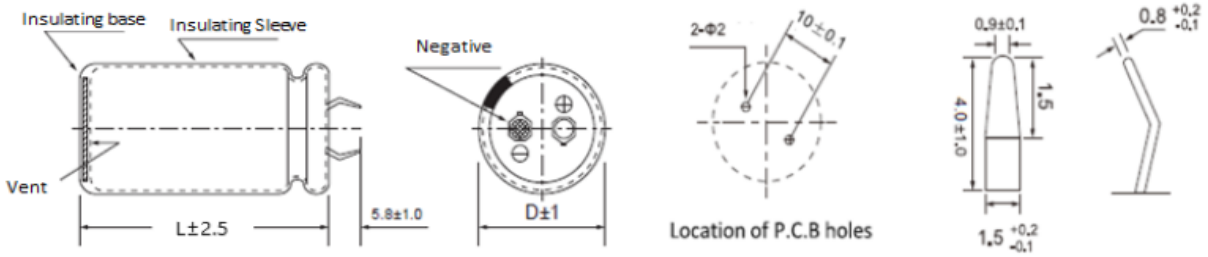

※When the code 11~12 of part number is S1, the terminal length of standard capacitor is 4.0±1.0mm, and when it is SA, the terminal length of standard capacitor is 5.8±1.0mm.

■ Multiplier for Ripple Current

Freq. (Hz)	50	120	300	1K	10K	50K
400~450V	0.77	1.00	1.10	1.21	1.32	1.33

Jamicon Series：GG
Teapo Series：GG

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
400 (450)	240	25x25	0.2	1.17
	310	25x30	0.2	1.37
	370	30x25	0.2	1.50
	390	25x35	0.2	1.60
	470	35x25	0.2	1.55
	560	30x35	0.2	1.96
	620	35x30	0.2	1.81
	680	25x55	0.2	2.30
	750	25x60	0.2	2.47
	810	30x45	0.2	2.42
	910	35x40	0.2	2.31
	1000	35x45	0.2	2.48
	1100	30x60	0.2	2.50
	1300	35x55	0.2	2.91
	1500	35x60	0.2	3.15
420 (470)	220	25x25	0.20	1.15
	300	25x30	0.20	1.35
	350	30x25	0.20	1.46
	440	25x40	0.20	1.74
	510	25x45	0.20	1.90
	560	30x35	0.20	1.91
	640	25x55	0.20	2.23
	680	30x45	0.20	2.25
	720	25x60	0.20	2.42
	770	30x45	0.20	2.36
	880	30x50	0.20	2.57
	1000	35x45	0.20	2.48
	1110	35x50	0.20	2.71
	1300	35x55	0.20	2.90
	1400	35x60	0.20	3.04

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
450 （500）	210	25x25	0.20	1.10
	270	25x30	0.20	1.28
	330	25x35	0.20	1.48
	400	25x40	0.20	1.65
	400	35x25	0.20	1.43
	460	25x45	0.20	1.81
	520	25x50	0.20	1.95
	580	25x55	0.20	2.13
	600	30x40	0.20	2.03
	640	25x60	0.20	2.28
	690	30x45	0.20	2.23
	780	35x40	0.20	2.14
	890	30x55	0.20	2.63
	1000	30x60	0.20	2.83
	1100	35x55	0.20	2.68
	1300	35x60	0.20	2.92

Jamicon Series：LM
Teapo Series：LM Downsized、Low profile、Long Life Series




■ Endurance: 105℃ 3000hours
■ Recommended Applications : Smoothing circuit, TV/Monitor,Adapter, SMPS
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-25 ~ +105℃
Rated Voltage Range	400 ~ 450VDC
Rated Capacitance Range	82 ~ 1000 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I = $\sqrt{3}$ CV. (After rated voltage applied for 5 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 400 / 420 / 450 tan δ: 0.15 / 0.20 / 0.20
Low Temperature Stability Impedance Ratio (MAX)	Measurement frequency : 120Hz Rated voltage(V): 400 / 420 / 450 Z-25℃ / Z+20℃: 4 / 8 / 8 Z-40℃ / Z+20℃: — / — / —
Endurance	After applying rated voltage with rated Ripple current for 3000hrs at 105℃, the capacitor shall meet the following requirement. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

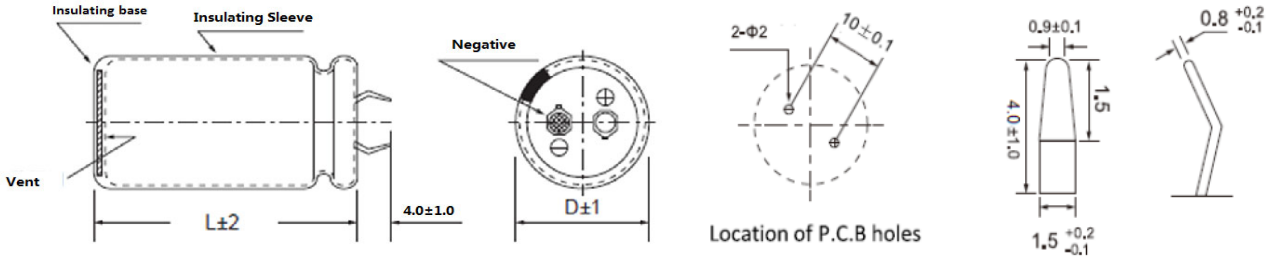

※When the code 11~12 of part number is S1, the terminal length of standard capacitor is 4.0±1.0mm, and when it is SA, the terminal length of standard capacitor is 5.8±1.0mm.

■ Multiplier for Ripple Current

Freq. (Hz)	50	120	300	1K	10K	50K
400~450V	0.77	1.00	1.16	1.30	1.41	1.43

Jamicon Series：LM
Teapo Series：LM

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
400 (450)	120	22x25	0.15	0.77
	150	22x30	0.15	0.9
	180	22x35	0.15	1.02
		25x25	0.15	0.99
	220	22x40	0.15	1.15
		25x30	0.15	1.13
	270	22x45	0.15	1.29
		25x35	0.15	1.30
		30x25	0.15	1.29
	330	22x50	0.15	1.47
		25x40	0.15	1.47
		30x30	0.15	1.45
		35x25	0.15	1.52
	390	25x45	0.15	1.63
		25x50	0.15	1.66
		30x35	0.15	1.61
	470	30x40	0.15	1.82
		35x30	0.15	1.85
	560	30x45	0.15	2.04
		30x50	0.15	2.07
		35x35	0.15	2.05
	680	35x40	0.15	2.34
		35x45	0.15	2.40
	820	35x50	0.15	2.69
	1000	35x60	0.15	2.75
420(470)	220	22x45	0.20	1.17
		22x50	0.20	1.20
		25x35	0.20	1.18
		30x30	0.20	1.18
	270	25x40	0.20	1.33
		25x45	0.20	1.36
		35x25	0.20	1.38
	330	25x50	0.20	1.52
		30x35	0.20	1.48
		30x40	0.20	1.52

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
420(470)	330	35x30	0.20	1.55
	390	30x45	0.20	1.70
		35x35	0.20	1.71
	470	30x50	0.20	1.90
		35x40	0.20	1.95
	560	35x45	0.20	2.17
	680	35x50	0.20	2.45
450 (500)	82	22x25	0.20	0.64
	120	22x30	0.20	0.81
		22x35	0.20	0.83
		25x25	0.20	0.81
	150	22x40	0.20	0.94
		25x30	0.20	0.93
	180	22x45	0.20	1.06
		25x35	0.20	1.06
		30x25	0.20	1.06
	220	22x50	0.20	1.20
		25x40	0.20	1.20
		30x30	0.20	1.18
		35x25	0.20	1.24
	270	25x45	0.20	1.36
		25x50	0.20	1.38
		30x35	0.20	1.34
		35x30	0.20	1.40
	330	30x40	0.20	1.52
	390	30x45	0.20	1.70
		30x50	0.20	1.73
		35x35	0.20	1.71
	470	35x40	0.20	1.95
		35x45	0.20	1.99
	560	35x50	0.20	2.22
	680	35x55	0.20	2.30
	820	35x60	0.20	2.42
	1000	35x65	0.20	2.77

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

JAMICON Snap-in Type Aluminium Electrolytic Capacitors TEAPO

Jamicon Series：GS
Teapo Series：GS

Downsized、Low profile Series




■ Endurance: 105℃3000 hours
■Recommended applications: Suitable for switch-mode power supplies and other industrial/inverter frequency converters/con
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-25 ~ +105℃
Rated Voltage Range	400 ~ 450VDC
Rated Capacitance Range	150 ~ 2200μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I = $3\sqrt{CV}$. (After rated voltage applied for 5 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 400 / 420 / 450 tan δ: 0.25 / 0.25 / 0.25
Low Temperature Stability Impedance Ratio (MAX)	Measurement frequency : 120Hz WV: 400 / 420 / 450 Z-25℃ / Z+20℃: 12 / 12 / 12
Endurance	After applying rated voltage with rated Ripple current for 3000hrs at 105℃,the capacitor shall meet the following requirements. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: initial specified value or less
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

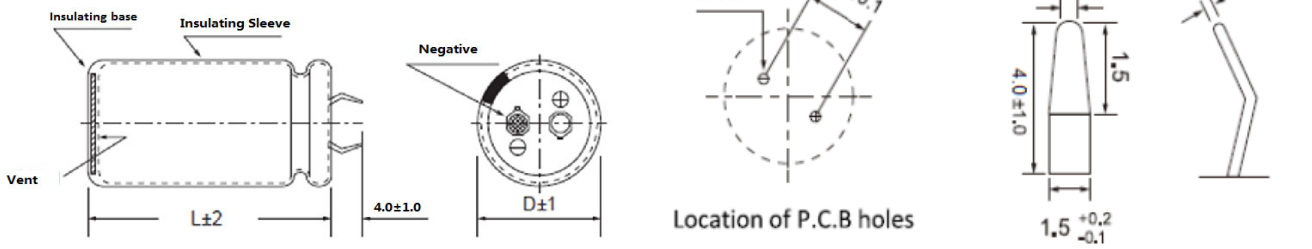

※When the code 11~12 of part number is S1, the terminal length of standard capacitor is 4.0±1.0mm, and when it is SA, the terminal length of standard capacitor is 5.8±1.0mm.

■ Multiplier for Ripple Current

Freq. (Hz)	50	120	300	1K	10K	50K
400~450V	0.77	1	1.10	1.21	1.32	1.33

Jamicon Series：GS
Teapo Series：GS

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
400 (450)	180	22x25	0.25	0.98
	220	22x30	0.25	1.14
		25x25	0.25	1.10
	270	22x35	0.25	1.32
		25x30	0.25	1.29
	330	22x40	0.25	1.48
		25x30	0.25	1.36
		30x25	0.25	1.31
	390	22x45	0.25	1.66
		25x35	0.25	1.56
		30x30	0.25	1.52
	470	22x50	0.25	1.85
		25x40	0.25	1.75
		30x30	0.25	1.57
		35x25	0.25	1.40
	560	22x60	0.25	2.14
		25x45	0.25	1.94
		30x35	0.25	1.80
		35x30	0.25	1.67
	680	25x55	0.25	2.29
		30x40	0.25	2.04
		35x35	0.25	1.91
	820	30x45	0.25	2.26
		35x40	0.25	2.17
	1000	30x55	0.25	2.65
		35x45	0.25	2.41
	1200	35x50	0.25	2.62
	1500	35x60	0.25	3.03
420 (470)	150	22x25	0.25	0.92
	180	22x30	0.25	1.06
	220	22x30	0.25	1.15
		25x25	0.25	1.11
	270	22x35	0.25	1.33
		25x30	0.25	1.29
	330	22x40	0.25	1.50
		25x35	0.25	1.49
		30x25	0.25	1.30
	390	22x45	0.25	1.67
		25x40	0.25	1.67
		30x30	0.25	1.52
	470	22x55	0.25	1.95
		25x40	0.25	1.73
		30x35	0.25	1.74
		35x25	0.25	1.39
	560	22x60	0.25	2.11
		25x50	0.25	2.07
		30x35	0.25	1.78
		35x30	0.25	1.65
	680	25x60	0.25	2.39
		30x40	0.25	2.02
		35x35	0.25	1.89
	820	30x50	0.25	2.42
		35x40	0.25	2.16
	1000	30x60	0.25	2.79
		35x45	0.25	2.39
	1200	35x55	0.25	2.79

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
450 （500）	150	22x25	0.25	0.93
	180	22x30	0.25	1.08
		25x25	0.25	1.04
	220	22x35	0.25	1.24
		25x30	0.25	1.21
	270	22x40	0.25	1.40
		25x30	0.25	1.29
		30x25	0.25	1.25
	330	22x45	0.25	1.59
		25x35	0.25	1.49
		30x30	0.25	1.41
	390	22x50	0.25	1.76
		25x40	0.25	1.67
		30x30	0.25	1.45
		35x25	0.25	1.28
	470	22x60	0.25	2.04
		25x45	0.25	1.86
		30x35	0.25	1.66
		35x30	0.25	1.52
	560	25x55	0.25	2.18
		30x40	0.25	1.96
		35x35	0.25	1.74
	680	30x45	0.25	2.17
		35x40	0.25	2.10
	820	30x55	0.25	2.55
		35x45	0.25	2.33
	1000	35x50	0.25	2.55
	1200	35x60	0.25	2.94

Snap-in Type Aluminium Electrolytic Capacitors

JAMICON TEAPO

Jamicon Series：QW
Teapo Series：QW

High temperature corresponding, long life product series



■ Endurance: 125℃ 3000 hrs

■ Suitable for high-temperature resistant industrial equipment such as large-scale power supplies, photovoltaic products, frequency converters and inverters

■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +125℃ -25~ +125℃
Rated Voltage Range	25 ~ 100VDC 400 ~ 450VDC
Rated Capacitance Range	560 ~ 18000 μF 220 ~ 820 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I≤ $\sqrt[3]{CV}$ (After rated voltage applied for 5minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)

Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)

WV	25	35	40	50	63	80	100	400	450
tan δ	0.25	0.20	0.15	0.12	0.10	0.10	0.10	0.20	0.20

Low Temperature Stability Impedance Ratio (MAX)

Measurement frequency : 120Hz

Rated voltage(V)	25	35	40	50~63	80~100	400	450
Z-25℃ / Z+20℃	4	3	3	2	2	4	8
Z-40℃ / Z+20℃	10	8	6	6	5	-	-

Endurance


After applying rated voltage with rated Ripple current for 3000hrs at 125℃,when the capacitors are restored to 20℃,the capacitor shall meet the following requirements.

Capacitance change	Within ± 20% of initial value
D.F. (tan δ)	Not more than 200% of specified value
Leakage current	initial specified value or less

Shelf Life

After 1000 hours of storage at 125 ℃, the temperature should be restored to 20 ℃ for measurement. Before measurement, pre experimental treatment should be conducted (refer to Article 4.1 of JIS C 5101-4 for treatment methods). The capacitor should meet the same requirements as durability

■ Dimensions [mm]

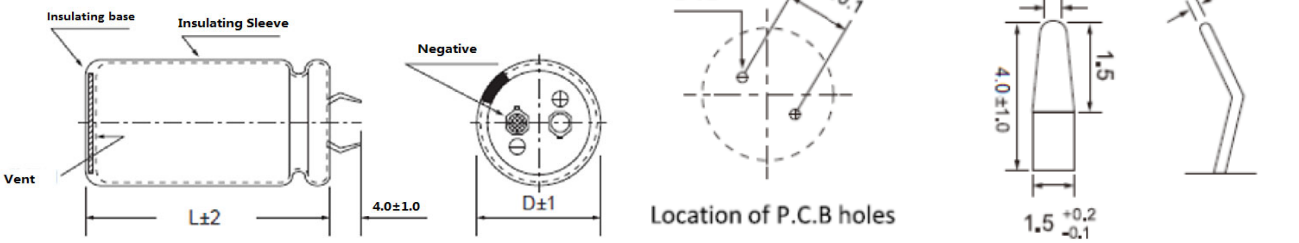

※When the code 11~12 of part number is S1, the terminal length of standard capacitor is 4.0±1.0mm, and when it is SA, the terminal length of standard capacitor is 5.8±1.0mm.

■ Ripple current frequency correction coefficient

Freq. (Hz)	50	60	120	1K	10~100K
25~100V	0.56	0.56	1.00	1.20	1.30
160~250V	0.75	0.80	1.00	1.30	1.40

■ temperature coefficient

nbient temperatu	40	60	70	85	105	125
25~100V	2.45	2.18	2.05	1.85	1.55	1.00
160~250V	2.30	2.00	1.85	1.70	1.50	1.00

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：QW
Teapo Series：QW

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms,125℃) (120Hz)
25(32)	2700	22x25	0.25	2.00
	3900	22x30	0.25	2.50
		25x25	0.25	2.30
	5600	30x25	0.25	2.70
	6800	25x35	0.25	3.40
	8200	30x40	0.25	4.39
		25x50	0.25	4.36
	12000	30x50	0.25	5.33
	18000	35x50	0.25	6.45
35(44)	2200	25x35	0.20	1.95
	3300	22x40	0.20	2.35
	3900	25x40	0.20	2.74
	4700	30x40	0.20	3.34
	5600	25x50	0.20	3.63
		30x45	0.20	3.84
	6800	30x50	0.20	4.42
	8200	35x40	0.20	4.83
	12000	35x50	0.20	6.42
40(50)	1200	22x25	0.15	1.50
	1500	22x30	0.15	1.80
		25x25	0.15	1.70
	1800	25x30	0.15	2.14
	2200	25x30	0.15	2.36
		30x25	0.15	2.10
	2700	25x35	0.15	2.50
	3300	25x40	0.15	2.61
		30x25	0.15	2.40
	3900	25x40	0.15	2.84
	4700	30x40	0.15	3.46
	5600	35x40	0.15	4.14
	6800	30x50	0.15	4.58
		35x45	0.15	4.79
	8200	35x50	0.15	5.49
50(63)	1000	25x30	0.12	1.42
	1800	25x35	0.12	2.04
	2200	30x30	0.12	2.12
	2700	25x40	0.12	2.64
	3300	30x35	0.12	3.07
	3900	30x40	0.12	3.53
	4700	35x40	0.12	4.24
	5600	30x50	0.12	4.65
		35x45	0.12	4.86
	6800	35x50	0.12	5.59
63(79)	820	22x25	0.10	1.2
	1200	22x30	0.10	1.50
		25x25	0.10	1.50
	1800	30x25	0.10	1.80
	2200	25x35	0.10	2.20
	2700	30x30	0.10	2.55
	3300	25x50	0.10	3.15
		30x40	0.10	3.17

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms,125℃) (120Hz)
63(79)	3900	30x45	0.10	3.62
		35x35	0.10	3.57
	4700	30x50	0.10	4.16
	5600	35x50	0.10	4.96
80(100)	680	22x25	0.10	1.00
	820	22x30	0.10	1.17
	1000	25x30	0.10	1.39
	1500	25x35	0.10	1.82
	2200	30x30	0.10	2.30
	2700	25x45	0.10	2.72
	3300	35x35	0.10	3.28
		30x40	0.10	3.17
	3900	30x50	0.10	3.79
	4700	35x50	0.10	4.54
100(125)	560	25x25	0.10	1.08
	680	25x30	0.10	1.24
	820	25x35	0.10	1.34
	1000	30x30	0.10	1.55
	1500	25x45	0.10	2.02
	1800	25x50	0.10	2.32
	2200	30x40	0.10	2.59
	2700	30x50	0.10	3.15
	3300	35x45	0.10	3.64
	3900	35x50	0.10	4.14
400(450)	270	30x30	0.20	1.24
	330	30x35	0.20	1.41
	330	35x30	0.20	1.48
	390	30x40	0.20	1.57
	390	30x45	0.20	1.61
	390	35x35	0.20	1.64
	470	30x50	0.20	1.86
	470	35x40	0.20	1.80
	560	30x60	0.20	2.04
	560	35x45	0.20	2.08
	680	35x55	0.20	2.39
	820	35x60	0.20	2.67
450(500)	220	30x30	0.20	1.12
	270	30x35	0.20	1.27
	270	30x40	0.20	1.31
	270	35x30	0.20	1.34
	330	30x45	0.20	1.48
	330	35x35	0.20	1.51
	390	30x50	0.20	1.64
	390	35x40	0.20	1.70
	470	30x55	0.20	1.84
	470	30x60	0.20	1.87
	470	35x45	0.20	1.91
	560	35x50	0.20	2.13
	560	35x55	0.20	2.17
	680	35x60	0.20	2.43


Jamicon Series：LA
Teapo Series：LA

Charge-Discharge Facility Series




- Endurance:105℃ 3000 hours
- Suitable for high frequency of regenerative voltage of AC servo motor and general inverter
- Most suitable for high frequency power on/off applications and applications where the power supply voltage varies gr
- Can withstand DC charge and discharge for 50 million cycles
- Corresponding product to RoHS

SPECIFICATIONS

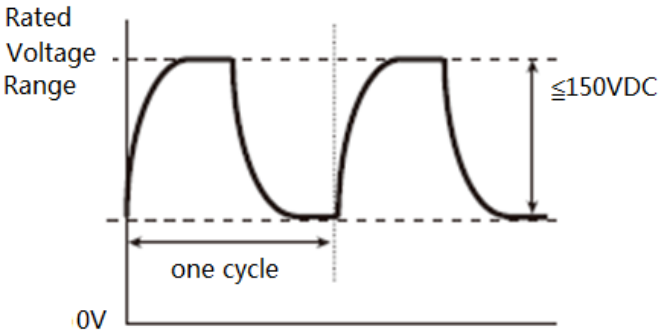Item		Characteristics
Category Temperature Range		-25 ~ +105℃
Rated Voltage Range		350~ 450VDC
Rated Capacitance Range		100 ~ 820 μF
Capacitance Tolerance		± 20 % (120Hz , 20℃)
Leakage Current (20℃)		I = $\sqrt{3}$ CV. (After rated voltage applied for 5minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)		WV: 350~400 / 420~450 tan δ: 0.15 / 0.20
Charge discharge condition	Frequency	6Hz
	Cycle	50 million cycles
	Voltage waveform	
Low Temperature Stability Impedance Ratio (MAX)		Measurement frequency : 120Hz Rated voltage(V): 350 / 400 / 420 / 450 Z-25℃ / Z+20℃: 8 / 8 / 8 / 8
Endurance		After applying rated voltage with rated Ripple current for 3000hrs at 105℃, the capacitor shall meet the following requirement. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: Not more than the specified value
Shelf Life		The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

Dimensions [mm]

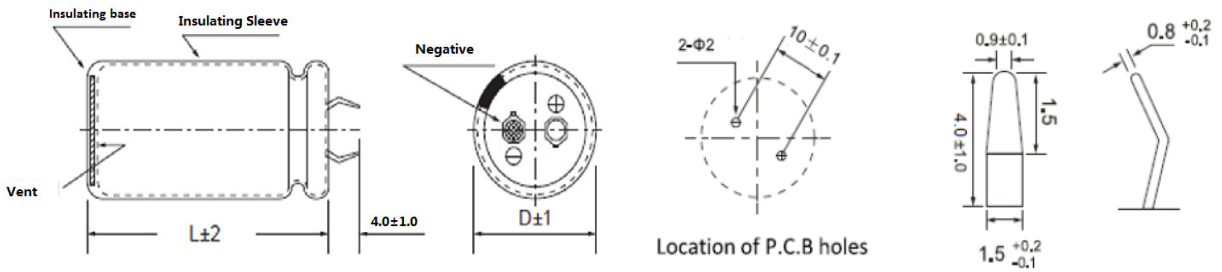

※When the code 11~12 of part number is S1, the terminal length of standard capacitor is 4.0±1.0mm, and when it is SA, the terminal length of standard capacitor is 5.8±1.0mm.

Multiplier for Ripple Current

Freq. (Hz)	50	120	300	1K	10K	≧50K
350~450V	0.77	1.00	1.16	1.30	1.41	1.43

Jamicon Series：LA
Teapo Series：LA

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
350(400)	120	22x25	0.15	0.75
	150	22x30	0.15	0.82
	180	25x25	0.15	0.90
	220	22x35	0.15	1.00
		25x30	0.15	1.00
	270	22x40	0.15	1.10
		25x35	0.15	1.10
		30x25	0.15	1.10
	330	22x45	0.15	1.20
		25x40	0.15	1.20
		30x30	0.15	1.20
	390	25x45	0.15	1.30
		30x35	0.15	1.30
	470	25x50	0.15	1.40
		30x40	0.15	1.40
		35x30	0.15	1.40
	560	30x45	0.15	1.50
		35x35	0.15	1.50
	680	30x50	0.15	1.70
		35x40	0.15	1.70
	820	35x45	0.15	1.90
400(450)	100	22x25	0.15	0.68
	120	22x30	0.15	0.73
	150	22x35	0.15	0.85
	180	22x35	0.15	0.95
		25x30	0.15	0.95
		30x25	0.15	0.95
	220	22x45	0.15	1.10
		25x35	0.15	1.10
		30x25	0.15	1.10
	270	22x50	0.15	1.22
		25x40	0.15	1.22
		30x30	0.15	1.22
		35x25	0.15	1.22
	330	25x45	0.15	1.44
		30x35	0.15	1.44
	390	25x50	0.15	1.55
		30x40	0.15	1.55
		35x30	0.15	1.55
	470	30x45	0.15	1.68
		35x35	0.15	1.68
	560	30x50	0.15	1.90
		35x40	0.15	1.90
	680	35x50	0.15	2.12

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
420(470)	100	22x25	0.20	0.66
	120	22x30	0.20	0.81
		25x25	0.20	0.81
	150	22x35	0.20	0.84
		25x30	0.20	0.84
	180	22x40	0.20	0.91
		25x30	0.20	0.91
		30x25	0.20	0.91
	220	22x45	0.20	1.05
		25x35	0.20	1.05
		30x30	0.20	1.05
	270	25x40	0.20	1.25
		30x30	0.20	1.25
		35x25	0.20	1.25
	330	25x50	0.20	1.42
		30x35	0.20	1.42
		35x30	0.20	1.42
	390	30x40	0.20	1.61
		35x35	0.20	1.61
	470	30x45	0.20	1.86
		35x40	0.20	1.86
	560	35x45	0.20	1.98
	680	35x50	0.20	2.20
450(500)	100	22x30	0.20	0.69
		25x25	0.20	0.69
	120	22x35	0.20	0.72
	150	22x40	0.20	0.79
		25x30	0.20	0.79
		30x25	0.20	0.79
	180	22x45	0.20	0.87
		25x35	0.20	0.87
		30x30	0.20	0.87
	220	25x40	0.20	1.05
		30x30	0.20	1.05
		35x25	0.20	1.05
	270	25x50	0.20	1.23
		30x35	0.20	1.23
		35x30	0.20	1.23
	330	30x40	0.20	1.38
		35x35	0.20	1.38
	390	30x50	0.20	1.61
		35x40	0.20	1.61
	470	35x45	0.20	1.78
	560	35x50	0.20	1.99

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：HV
Teapo Series：GD No Spark with DC Overvoltage Series




■ Endurance: 105℃3000hours
■ Recommended Applications: Smoothing circuit, TV/Monitor,Adapter, SMPS
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-25 ~ +105℃
Rated Voltage Range	200~400 VDC
Rated Capacitance Range	68~1500 μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I = 3√CV. (After rated voltage applied for 5 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 200 / 400 tan δ: 0.15 / 0.15
Low Temperature Stability Impedance Ratio (MAX)	Measurement frequency : 120Hz Rated voltage(V): 200 / 400 Z-25℃ / Z+20℃: 4 / 6
Endurance	After applying rated voltage with rated ripple current for3000 hours at 105℃ , the capacitors shall meet the following requirements. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

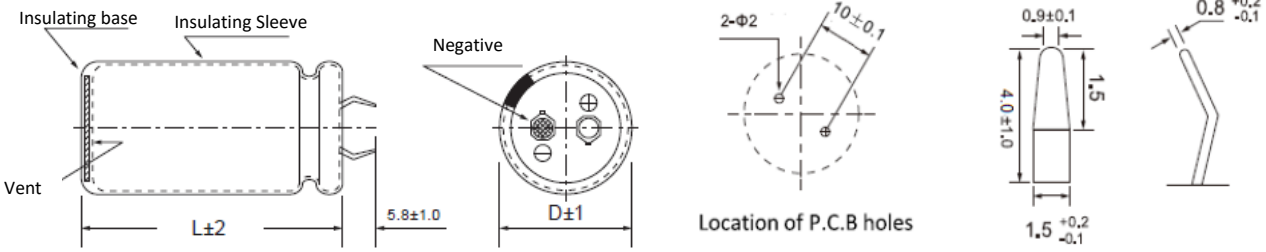

※When the code 11~12 of part number is S1, the terminal length of standard capacitor is 4.0±1.0mm, and when it is SA, the terminal length of standard capacitor is 5.8±1.0mm.

■ Multiplier for Ripple Current

Freq. (Hz)	60	120	400	1K	10K
200V	0.80	1.00	1.10	1.30	1.40
400WV	0.80	1.00	1.10	1.30	1.40

Jamicon Series：HV
Teapo Series：GD

■STANDARD RATINGS


Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
200V （250）	270	22x25	0.15	0.89
	330	22x30	0.15	1.06
		25x25	0.15	1.01
	390	22x35	0.15	1.24
		25x30	0.15	1.18
	470	22x40	0.15	1.44
		25x30	0.15	1.30
		30x25	0.15	1.34
	560	22x45	0.15	1.65
		25x35	0.15	1.51
		30x30	0.15	1.58
	680	22x50	0.15	1.91
		25x40	0.15	1.76
		30x35	0.15	1.85
	820	25x50	0.15	2.13
		30x35	0.15	2.03
		35x30	0.15	2.03
	1000	30x45	0.15	2.50
		35x35	0.15	2.38
	1200	30x50	0.15	2.86
		35x40	0.15	2.75
	1500	35x45	0.15	3.11
400V (450)	68	22x25	0.15	0.46
	82	22x30	0.15	0.55

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
400V (450)	82	25x25	0.15	0.52
	100	22x35	0.15	0.65
		25x30	0.15	0.62
	120	22x40	0.15	0.76
		25x30	0.15	0.68
		30x25	0.15	0.67
	150	22x45	0.15	0.89
		25x35	0.15	0.82
		30x30	0.15	0.81
	180	22x50	0.15	1.03
		25x40	0.15	0.95
		30x30	0.15	0.89
		35x25	0.15	0.91
	220	25x45	0.15	1.11
		30x35	0.15	1.04
		35x30	0.15	1.08
	270	25x50	0.15	1.28
		30x40	0.15	1.22
		35x35	0.15	1.27
	330	30x45	0.15	1.42
		35x35	0.15	1.40
	390	30x50	0.15	1.62
		35x40	0.15	1.61
	470	35x45	0.15	1.86

■DC OVERVOLTAGE TEST CONDITION

The vent will be operated and the capacity shall become an open circuit without burning the material when the following excess DC voltage is applied.

Rated Voltage	Capacitance	Current	Test DC Voltage
200VDC	＜330μF	4A	300/375 VDC
	330≦C＜470μF	5A	
	≧470μF	7A	
400VDC	＜100μF	2A	500/600 VDC
	100≦C＜220μF	4A	
	≧220μF	7A	

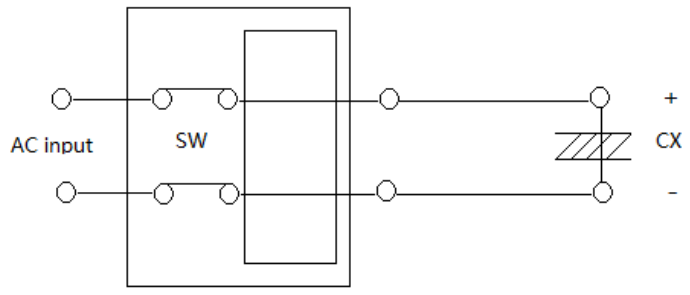

Constant DC voltage/current power supply

Jamicon Series：KP
Teapo Series：KP Standard Series



■ Endurance:85℃ 2000hours
■ Recommended Applications :UPS、service system、press working equipment、charging equipment、inverter、converter
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics	
Category Temperature Range	-40 ~ +85℃	-25 ~ +85℃
Rated Voltage Range	6.3~ 100VDC	160~450VDC
Capacitance Tolerance	± 20 % (120Hz , 20℃)	
Leakage Current (20℃)	I≦0.02CVor5mA whichever is greater. (After rated voltage applied for 5 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)	

Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)

WV		6.3~10	16	25	35	50	63	80	100	160~250	350~450
tan δ	φ35	0.75	0.60	0.40	0.30	0.25	0.20	0.20	0.15	0.15	0.20
	φ51	1.00	0.70	0.50	0.50	0.30	0.25	0.20	0.20	0.15	0.20
	φ64	1.30	0.80	0.70	0.60	0.50	0.30	0.25	0.25	0.20	0.25
	φ77	1.50	1.00	0.80	0.70	0.60	0.40	0.30	0.25	0.20	0.25
	φ90	1.50	1.00	0.80	0.70	0.60	0.40	0.30	0.25	0.20	0.25

Low Temperature Stability Impedance Ratio (MAX)

Measurement frequency : 120Hz

Rated voltage(V)	10~100	160~450
Z-25℃ / Z+20℃	-	8
Z-40℃ / Z+20℃	12	-

Endurance


After applying rated voltage with ripple current for 2000 hours at85℃,
the capacitors shall meet the following requirements.

Capacitance change	Within ± 15% of initial value
D.F. (tan δ)	Not more than 175% of specified value
Leakage current	Not more than the specified value

Shelf Life

The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

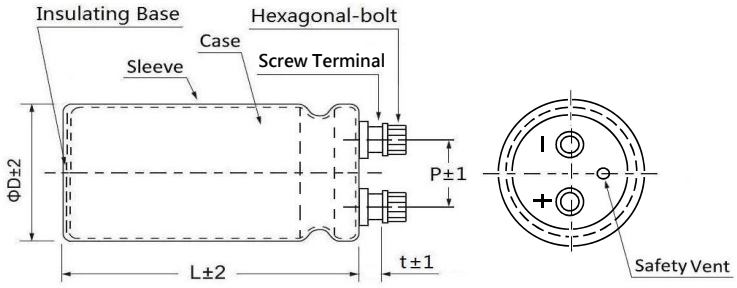

ΦD	P	t	Hexagonal-bolt
35	12.7	6.3	M5 × 0.8 × 10
51	21.8	6.3	M5 × 0.8 × 10
64	28.2	6.3	M5 × 0.8 × 10
77	31.4	5.8	M5 × 0.8 × 10
90	31.4	5.8	M5 × 0.8 × 10

■ Multiplier for Ripple Current

Freq. (Hz)	60	120	1K	10K	100K
W.V	coefficient				
6.3~35V	0.90	1.00	1.05	1.10	1.10
50~100V	0.90	1.00	1.10	1.15	1.15
160~450V	0.80	1.00	1.20	1.40	1.40

Temperature	≦60	70	85
coefficient	1.8	1.6	1.00

Jamicon Series：KP

Teapo Series：KP

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	R.C (A/rms,85℃) (120Hz)
6.3 (8)	47000	35x50	0.75	4.94
	56000	35x60	0.75	4.96
	68000	35x60	0.75	5.47
	82000	35x80	0.75	6.82
	100000	35x80	0.75	7.53
	120000	35x121	0.75	9.15
	150000	51x80	1.00	9.51
	180000	51x80	1.00	10.42
	220000	51x100	1.00	12.39
	270000	64x100	1.30	13.68
	330000	64x100	1.30	15.12
	390000	64x121	1.30	16.97
	470000	64x121	1.30	18.63
	560000	77x121	1.50	18.80
	680000	77x121	1.50	20.71
10 (13)	33000	35x50	0.75	4.14
	39000	35x50	0.75	4.50
	47000	35x60	0.75	5.35
	56000	35x80	0.75	6.63
	68000	35x80	0.75	7.31
	82000	35x80	0.75	8.02
	100000	35x121	0.75	9.21
	120000	51x80	1.00	9.23
	150000	51x80	1.00	10.32
	180000	51x90	1.00	11.50
	220000	51x121	1.00	13.66
	270000	51x121	1.00	15.13
	330000	64x121	1.30	17.25
	390000	64x121	1.30	18.75
	470000	77x121	1.50	19.25
	560000	77x121	1.50	21.01
16 (20)	22000	35x50	0.60	4.16
	33000	35x60	0.60	5.51
	39000	35x80	0.60	6.80
	47000	35x80	0.60	7.47
	56000	35x100	0.60	9.03
	68000	35x121	0.60	9.88
	82000	35x121	0.60	10.85
	100000	51x80	0.70	10.86
	120000	51x90	0.70	11.74
	150000	51x121	0.70	12.48
	180000	51x121	0.70	13.67
	220000	64x100	0.80	14.75
	270000	64x115	0.80	17.37
	330000	77x121	1.00	18.19
	390000	77x121	1.00	19.78
25(32)	18000	35x50	0.40	3.35
	22000	35x60	0.40	4.01
	27000	35x80	0.40	5.04
	33000	35x80	0.40	5.58
	39000	35x80	0.40	6.06
	47000	35x121	0.40	7.54
	56000	35x121	0.40	8.23
	68000	51x100	0.50	9.13
	82000	51x100	0.50	10.03
	100000	51x121	0.50	11.27
	120000	51x121	0.50	12.33
	150000	64x100	0.70	12.69
	180000	64x100	0.70	13.89
	220000	64x144	0.70	16.05
	270000	77x115	0.80	17.80
	330000	77x144	0.80	20.38

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	R.C (A/rms,85℃) (120Hz)
35(44)	10000	35x50	0.30	3.53
	12000	35x50	0.30	3.87
	15000	35x60	0.30	3.96
	18000	35x60	0.30	4.34
	22000	35x80	0.30	4.93
	27000	35x80	0.30	5.46
	33000	35x121	0.30	7.20
	39000	35x121	0.30	7.83
	47000	51x80	0.50	8.26
	56000	51x80	0.50	9.02
	68000	51x100	0.50	10.35
	82000	51x100	0.50	11.36
	100000	64x100	0.60	11.48
	120000	64x121	0.60	13.13
	150000	64x144	0.60	15.42
	180000	64x144	0.60	16.89
	220000	77x144	0.70	17.79
50(63)	6800	35x50	0.25	3.26
	8200	35x50	0.25	3.58
	10000	35x60	0.25	4.27
	12000	35x60	0.25	4.68
	15000	35x80	0.25	5.94
	18000	35x80	0.25	6.51
	22000	35x121	0.25	6.70
	27000	35x121	0.25	7.42
	33000	51x80	0.30	7.55
	39000	51x80	0.30	8.20
	47000	51x100	0.30	9.80
	56000	51x100	0.30	10.70
	68000	64x100	0.50	11.34
	82000	64x100	0.50	12.46
	100000	64x144	0.50	12.81
	120000	64x144	0.50	14.03
	150000	77x144	0.60	15.86
63 (79)	5600	35x50	0.20	2.97
	6800	35x50	0.20	3.28
	8200	35x60	0.20	3.89
	10000	35x80	0.20	4.77
	12000	35x80	0.20	5.23
	15000	35x100	0.20	5.88
	18000	35x121	0.20	6.16
	22000	51x80	0.25	7.73
	27000	51x80	0.25	8.56
	33000	51x100	0.25	8.76
	39000	51x121	0.25	10.22
	47000	64x100	0.30	11.88
	56000	64x100	0.30	12.96
	68000	64x144	0.30	13.63
	100000	77x144	0.40	15.86
80 (100)	4700	35x50	0.20	2.72
	5600	35x60	0.20	3.22
	6800	35x80	0.20	4.03
	8200	35x80	0.20	4.42
	10000	35x100	0.20	5.41
	12000	35x121	0.20	6.47
	15000	51x80	0.20	7.63
	18000	51x80	0.20	8.35
	22000	51x100	0.20	8.76
	27000	51x100	0.20	9.70
	33000	64x100	0.25	10.22
	39000	64x100	0.25	11.11
	47000	64x144	0.25	14.33

Jamicon Series：KP

Teapo Series：KP

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	R.C (A/rms,85℃) (120Hz)
80 (100)	56000	64x144	0.25	15.64
	68000	77x144	0.30	16.27
100 (125)	2200	35x50	0.15	2.15
	2700	35x50	0.15	2.38
	3300	35x50	0.15	2.64
	3900	35x60	0.15	3.10
	4700	35x80	0.15	3.87
	5600	35x80	0.15	4.22
	6800	35x100	0.15	5.15
	8200	35x121	0.15	5.83
	10000	51x80	0.20	6.03
	12000	51x80	0.20	6.60
	15000	51x121	0.20	8.86
	18000	51x121	0.20	9.71
	22000	64x100	0.25	9.79
	27000	64x100	0.25	10.85
	33000	64x144	0.25	12.80
	39000	77x115	0.25	13.11
	47000	77x144	0.25	14.81
160 (200)	1200	35x50	0.15	2.64
	1500	35x60	0.15	3.20
	1800	35x70	0.15	3.63
	2200	35x80	0.15	4.26
	2700	35x100	0.15	4.68
	3300	35x121	0.15	5.22
	3900	51x70	0.15	5.70
	4700	51x70	0.15	6.26
	5600	51x90	0.15	7.00
	6800	51x90	0.15	7.72
	8200	51x115	0.15	9.04
	10000	64x96	0.20	10.30
	12000	64x96	0.20	11.29
	15000	64x130	0.20	13.83
	18000	64x130	0.20	15.15
	22000	77x130	0.20	18.57
	27000	77x130	0.20	20.58
	33000	90x131	0.20	23.90
	39000	90x157	0.20	28.10
200 (250)	680	35x50	0.15	1.99
	820	35x50	0.15	2.19
	1000	35x60	0.15	2.62
	1200	35x60	0.15	2.87
	1500	35x80	0.15	3.52
	1800	35x80	0.15	3.85
	2200	35x100	0.15	4.23
	2700	35x121	0.15	4.72
	3300	51x70	0.15	5.24
	3900	51x70	0.15	5.70
	4700	51x90	0.15	6.42
	5600	51x115	0.15	7.47
	6800	51x130	0.15	8.70
	8200	64x96	0.20	9.33
	10000	64x96	0.20	10.30
	12000	77x96	0.20	12.56
	15000	77x96	0.20	14.04
	18000	77x130	0.20	16.80
	22000	77x155	0.20	20.07
	27000	90x131	0.20	21.62
	33000	90x157	0.20	25.85
250 (300)	470	35x50	0.15	1.66
	560	35x50	0.15	1.81
	680	35x50	0.15	1.99

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	R.C (A/rms,85℃) (120Hz)
250 (300)	820	35x60	0.15	2.37
	1000	35x80	0.15	2.87
	1200	35x80	0.15	3.15
	1500	35x100	0.15	3.49
	1800	35x100	0.15	3.83
	2200	51x70	0.15	4.28
	2700	51x70	0.15	4.74
	3300	51x90	0.15	5.38
	3900	51x115	0.15	6.23
	4700	64x96	0.20	7.06
	5600	64x96	0.20	7.71
	6800	64x115	0.20	9.19
	8200	64x115	0.20	10.09
	10000	64x130	0.20	11.76
	12000	77x115	0.20	13.01
	15000	77x130	0.20	14.70
	18000	77x155	0.20	17.40
	22000	90x157	0.20	20.19
350 (400)	390	35x50	0.20	1.74
	470	35x80	0.20	2.35
	560	35x80	0.20	2.57
	680	35x80	0.20	2.83
	820	35x100	0.20	3.18
	1000	35x100	0.20	3.51
	1200	51x70	0.20	3.94
	1500	51x70	0.20	4.41
	1800	51x90	0.20	5.38
	2200	51x90	0.20	5.95
	2700	51x130	0.20	6.91
	3300	51x130	0.20	7.63
	3900	64x115	0.25	8.71
	4700	64x130	0.25	9.81
	5600	77x115	0.25	11.26
	6800	77x130	0.25	13.08
	8200	77x155	0.25	15.53
	10000	90x157	0.25	17.71
	12000	90x157	0.25	19.40
	15000	90x196	0.25	23.93
	18000	90x236	0.25	28.51
400 (450)	330	35x80	0.20	1.97
	390	35x80	0.20	2.14
	470	35x80	0.20	2.35
	560	35x80	0.20	2.57
	680	35x100	0.20	2.90
	820	35x100	0.20	3.18
	1000	51x70	0.20	3.60
	1200	51x70	0.20	3.94
	1500	51x90	0.20	4.91
	1800	51x90	0.20	5.38
	2200	51x130	0.20	6.23
	2700	64x96	0.25	7.09
	3300	64x115	0.25	8.01
	3900	64x130	0.25	8.94
	4700	77x115	0.25	10.32
	5600	77x130	0.25	11.87
	6800	77x155	0.25	14.14
	8200	90x157	0.25	16.03
	10000	90x157	0.25	17.71
	12000	90x196	0.25	21.40
	15000	90x236	0.25	26.02
450 (500)	270	35x50	0.20	1.45
	330	35x80	0.20	1.97

Jamicon Series：KP

Teapo Series：KP

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	R.C (A/rms,85℃) (120Hz)
450 (500)	390	35x80	0.20	2.14
	470	35x80	0.20	2.35
	560	35x100	0.20	2.63
	680	35x100	0.20	2.90
	820	51x70	0.20	3.26
	1000	51x70	0.20	3.60
	1200	51x90	0.20	4.39
	1500	51x115	0.20	5.17
	1800	51x130	0.20	5.64
	2200	64x96	0.25	6.40

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	R.C (A/rms,85℃) (120Hz)
450 (500)	2700	64x115	0.25	7.25
	3300	64x130	0.25	8.22
	3900	77x115	0.25	9.40
	4700	77x130	0.25	10.88
	5600	77x155	0.25	12.83
	6800	90x157	0.25	14.60
	8200	90x157	0.25	16.03
	10000	90x196	0.25	19.53
	12000	90x236	0.25	23.28

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：WP
Teapo Series：WP Standard 、High Ripple Series




■ Endurance:85℃ 2000hours
■ Recommended Applications :UPS、service system、press working equipment、charging equipment、inverter、converter
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-25 ~ +85℃
Rated Voltage Range	160 ~ 550VDC
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I≦0.02CVor5mA whichever is greater. (After rated voltage applied for 5 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 160 / 200 / 250 / 350~450 / 500~550 tan δ: 0.15 / 0.15 / 0.15 / 0.15 / 0.20
Low Temperature Stability Impedance Ratio (MAX)	Measurement frequency : 120Hz Rated voltage(V): 160~550 Z-25℃ / Z+20℃: 8
Endurance	After applying rated voltage with ripple current for 2000 hours at85℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 85℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

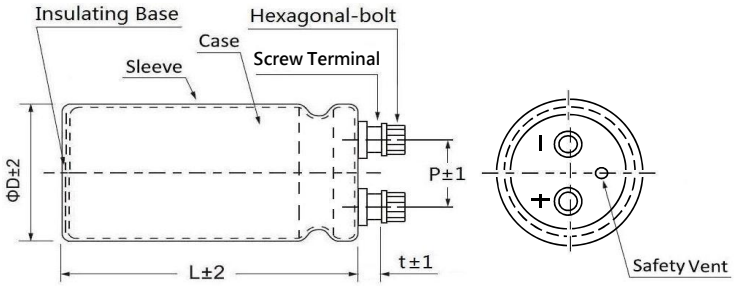

ΦD	P	t	Hexagonal-bolt
51	22.2	6.3	M5 × 0.8 × 10
64	28.5	6.3	M5 × 0.8 × 10
77	31.8	5.8	M5 × 0.8 × 10
90	31.6	5.8	M6 × 1.0 × 10

■ Multiplier for Ripple Current

Freq. (Hz)	60	120	300	1K	≧10K
coefficient	0.70	1.00	1.10	1.30	1.40

Temperature	40	60	85
coefficient	1.89	1.67	1.00

Jamicon Series：WP

Teapo Series：WP

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms 85℃) (120Hz)
160 (200)	3900	51x75	0.15	7.51
	4700	51x75	0.15	8.25
	5600	51x96	0.15	10.02
	6800	51x96	0.15	11.04
	8200	51x115	0.15	13.15
	10000	64x96	0.15	14.27
	12000	64x96	0.15	15.64
	15000	64x130	0.15	19.96
	18000	64x130	0.15	21.87
	22000	77x130	0.15	25.91
	27000	77x130	0.15	28.71
	33000	90x131	0.15	33.60
	39000	90x157	0.15	39.50
200 (250)	3300	51x75	0.15	6.91
	3900	51x75	0.15	7.51
	4700	51x96	0.15	9.18
	5600	51x115	0.15	10.86
	6800	51x130	0.15	12.65
	8200	64x96	0.15	12.93
	10000	64x100	0.15	14.53
	12000	77x96	0.15	16.82
	15000	77x96	0.15	18.80
	18000	77x130	0.15	23.44
	22000	77x155	0.15	28.00
	27000	90x131	0.15	30.39
	33000	90x157	0.15	36.33
250 (300)	2200	51x75	0.15	5.64
	2700	51x75	0.15	6.25
	3300	51x96	0.15	7.69
	3900	51x115	0.15	9.07
	4700	64x96	0.15	9.79
	5600	64x96	0.15	10.68
	6800	64x115	0.15	12.73
	8200	64x115	0.15	13.98
	10000	64x130	0.15	16.30
	12000	77x115	0.15	18.15
	15000	77x130	0.15	21.40
	18000	77x155	0.15	25.33
	22000	90x157	0.15	29.67
350 (400)	1200	51x75	0.15	5.21
	1500	51x80	0.15	5.99
	1800	51x96	0.15	7.10
	2200	51x96	0.15	7.85
	2700	51x130	0.15	9.97
	3300	51x130	0.15	11.02
		64x96	0.15	10.66
	3900	64x115	0.15	12.53
	4700	64x130	0.15	14.53
		77x96	0.15	13.07
	5600	77x115	0.15	15.39
	6800	77x130	0.15	17.89
	8200	77x155	0.15	21.22
	10000	90x157	0.15	25.00
	12000	90x157	0.15	27.39
	15000	90x196	0.15	33.78

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms 85℃) (120Hz)
350 (400)	18000	90x236	0.15	40.25
400 (450)	1000	51x75	0.15	4.76
	1200	51x80	0.15	5.36
	1500	51x96	0.15	6.48
	1800	51x96	0.15	7.10
	2200	51x130	0.15	9.00
	2700	64x96	0.15	9.64
	3300	64x115	0.15	11.53
	3900	64x130	0.15	13.23
		77x96	0.15	11.90
	4700	77x115	0.15	14.10
	5600	77x130	0.15	16.23
	6800	77x155	0.15	19.32
	8200	90x157	0.15	22.64
	10000	90x157	0.15	25.00
	12000	90x196	0.15	30.22
	15000	90x236	0.15	36.74
450 (500)	820	51x75	0.15	4.31
	1000	51x80	0.15	4.89
	1200	51x96	0.15	5.8
	1500	51x115	0.15	7.03
	1800	54x130	0.15	8.14
	2200	64x100	0.15	8.86
	2700	64x115	0.15	10.43
	3300	64x130	0.15	12.17
	3900	77x115	0.15	12.85
	4700	77x130	0.15	14.87
	5600	77x155	0.15	17.54
	6800	90x157	0.15	20.62
	8200	90x157	0.15	22.64
	10000	90x196	0.15	27.58
	12000	90x236	0.15	32.87
500 (550)	470	51x75	0.20	2.96
	680	51x96	0.20	3.97
	820	51x115	0.20	4.72
	1000	51x130	0.20	5.52
		64x96	0.20	5.34
	1500	64x115	0.20	7.08
		77x96	0.20	6.75
	1800	64x130	0.20	8.18
	2200	77x115	0.20	8.82
	2700	77x155	0.20	11.13
	3900	90x157	0.20	14.29
550 (600)	390	51x75	0.20	2.70
	560	51x96	0.20	3.60
		64x96	0.20	4.00
	680	51x115	0.20	4.30
		64x115	0.20	4.76
	820	51x130	0.20	4.99
		64x130	0.20	5.52
	1200	77x96	0.20	6.04
	1500	77x115	0.20	7.28
	1800	77x130	0.20	8.41
	2200	77x155	0.20	10.05
	3300	90x157	0.20	13.15

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：QP
Teapo Series：QP Standard 、High Ripple Series




■ Endurance:105℃ 2000hours
■ Recommended Applications :UPS、service system、press working equipment、charging equipment、inverter、converter
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-25~ +105℃
Rated Voltage Range	160 ~ 500VDC
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I≦0.02CVor5mA whichever is greater. (After rated voltage applied for 5 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 160 / 200 / 250 / 350 / 400~500 tan δ: 0.15 / 0.15 / 0.15 / 0.15 / 0.15
Low Temperature Stability Impedance Ratio (MAX)	Measurement frequency : 120Hz Rated voltage(V): 160~500 Z-25℃ / Z+20℃: 8
Endurance	After applying rated voltage with ripple current for 2000 hours at105℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

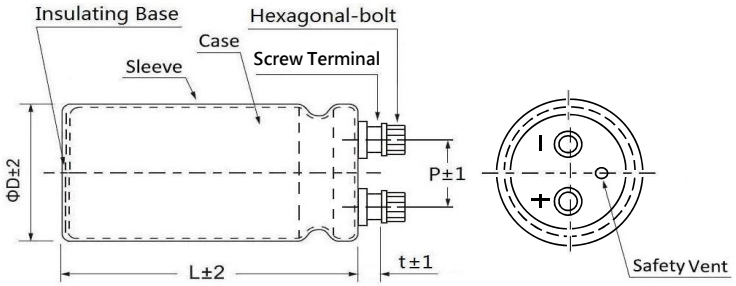

ΦD	P	t	Hexagonal-bolt
51	22.2	6.3	M5 × 0.8 × 10
64	28.5	6.3	M5 × 0.8 × 10
77	31.8	5.8	M5 × 0.8 × 10
90	31.6	5.8	M6 × 1.0 × 10

■ Multiplier for Ripple Current

Freq. (Hz)	60	120	300	1K	≧10K
coefficient	0.70	1.00	1.10	1.30	1.40

Temperature	40	60	85	105
coefficient	2.44	2.16	2.00	1.00

Jamicon Series：QP

Teapo Series：QP

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
160 (200)	4700	51x80	0.15	6.81
	5600	51x96	0.15	8.05
	6800	64x96	0.15	8.80
	8200	64x96	0.15	9.66
	10000	77x96	0.15	11.34
	15000	77x130	0.15	15.81
	22000	90x131	0.15	19.87
200 (250)	3300	51x80	0.15	5.23
	4700	51x96	0.15	6.76
	5600	64x96	0.15	7.99
	6800	64x115	0.15	9.52
	8200	77x66	0.15	10.27
	10000	77x115	0.15	12.24
	15000	90x131	0.15	16.47
250 (300)	2200	51x75	0.15	4.53
	3300	51x96	0.15	6.18
	3900	64x96	0.15	6.69
	4700	64x115	0.15	7.94
	5600	77x96	0.15	8.91
	6800	77x115	0.15	10.60
	8200	77x130	0.15	12.27
	10000	77x155	0.15	14.65
	15000	90x157	0.15	17.81
350 (400)	1000	51x75	0.15	4.08
	1200	51x75	0.15	4.47
	1500	51x96	0.15	5.56
	1800	51x96	0.15	6.09
	2200	51x115	0.15	7.29
	2700	64x96	0.15	8.48
	3300	64x115	0.15	10.13
	3900	64x115	0.15	11.02
	4700	64x130	0.15	12.77
	5600	77x130	0.15	15.46
	6800	77x130	0.15	17.03

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
350 (400)	8200	77x155	0.15	18.11
	10000	90x157	0.15	21.94
400 (450)	1000	51x75	0.15	4.08
	1200	51x96	0.15	4.97
	1500	51x96	0.15	5.56
	2200	64x96	0.15	7.65
	3300	64x130	0.15	10.70
	3900	64x155	0.15	12.59
	4700	77x130	0.15	14.16
	5600	77x155	0.15	16.70
	6800	90x157	0.15	16.83
	8200	90x157	0.15	18.48
	10000	90x196	0.15	22.52
450 (500)	1000	51x96	0.15	4.54
	1200	51x115	0.15	5.39
	1500	51x115	0.15	6.02
	2200	64x115	0.15	8.28
	3300	64x130	0.15	10.70
	3900	77x121	0.15	12.50
	4700	77x144	0.15	14.81
	5600	90x145	0.15	15.49
	6800	90x196	0.15	19.50
	8200	90x196	0.15	21.41
500 (550)	820	51x115	0.20	3.86
	1000	51x130	0.20	4.50
		64x96	0.2	4.37
	1200	64x115	0.20	5.18
	1500	64x130	0.20	6.12
		77x96	0.2	5.66
	1800	77x115	0.20	6.69
	2700	77x155	0.20	9.33
	1900	90x157	0.20	11.70
	6800	90x236	0.20	18.54

Jamicon Series：RP
Teapo Series：RP Wide temperature range standard Series



■ Endurance: 105℃ 2000hours
■ Recommended Applications :UPS、service system、press working equipment、charging equipment、inverter、converter
■ Corresponding product to RoHS

■ SPECIFICATIONS


Item	Characteristics	
Category Temperature Range	-40 ~ +105℃	-25 ~ +105℃
Rated Voltage Range	10~ 100VDC	160~450VDC
Capacitance Tolerance	± 20 % (120Hz , 20℃)	
Leakage Current (20℃)	I≦0.02CVor5mA whichever is greater. (After rated voltage applied for 5 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)	
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	Shown in the table of standard rating	
Low Temperature Stability Impedance Ratio (MAX)	Measurement frequency : 120Hz	

Rated voltage(V)	10~100	160~450
Z-25℃ / Z+20℃	-	8
Z-40℃ / Z+20℃	12	-

Endurance	After applying rated voltage with ripple current for 2000 hours at105℃, the capacitors shall meet the following requirements.	
	Capacitance change	Within ± 20% of initial value
	D.F. (tan δ)	Not more than 200% of specified value
	Leakage current	Not more than the specified value

Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

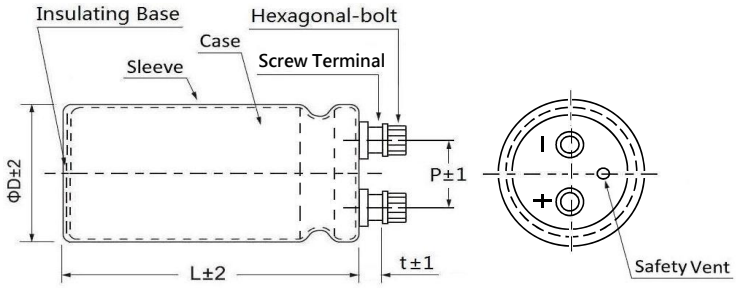

ΦD	P	t	Hexagonal-bolt
35	12.7	6.3	M5 × 0.8 × 10
51	21.8	6.3	M5 × 0.8 × 10
64	28.2	6.3	M5 × 0.8 × 10
77	31.4	5.8	M5 × 0.8 × 10
90	31.4	5.8	M5 × 0.8 × 10

■ Multiplier for Ripple Current

Freq. (Hz)	60	120	1K	10K	100K
W.V	coefficient				
10~35V	0.90	1.00	1.05	1.10	1.10
50~100V	0.90	1.00	1.10	1.15	1.15
160~450V	0.80	1.00	1.20	1.30	1.35
Temperature	45	55	70	85	105
coefficient ≦250V	3.00	2.50	2.00	1.40	1.00
≧350V	2.50	2.00	1.50	1.20	1.00

Jamicon Series：RP

Teapo Series：RP

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	R.C (A/rms,105℃) (120Hz)
10 (13)	33000	35x50	0.80	3.72
	47000	35x60	0.80	4.81
	56000	35x70	0.80	5.61
	68000	35x80	0.80	6.57
	100000	51x70	1.00	7.67
	150000	51x90	1.00	10.46
	220000	64x96	1.20	13.53
	330000	64x115	1.20	17.92
16 (20)	22000	35x50	0.70	3.25
	33000	35x60	0.70	4.31
	47000	35x80	0.70	5.84
	56000	35x90	0.70	6.72
	68000	51x70	0.90	6.66
	100000	51x90	0.90	9.00
	150000	64x96	1.00	11.22
	220000	64x115	1.00	14.69
	330000	77x115	1.20	18.24
25 (32)	22000	35x60	0.35	4.59
	33000	35x80	0.35	6.39
	47000	35x90	0.35	8.04
	56000	51x70	0.40	8.31
	68000	51x90	0.40	10.21
	100000	64x96	0.40	11.28
	150000	64x115	0.80	12.94
	220000	77x115	1.00	14.83
	330000	90x131	1.00	19.94
35 (44)	15000	35x60	0.30	4.09
	22000	35x80	0.30	5.63
	33000	51x70	0.45	6.56
	47000	51x80	0.45	8.29
	56000	51x90	0.45	9.53
	68000	51x115	0.50	11.11
	100000	64x115	0.60	12.20
	150000	77x115	0.70	13.90
	220000	90x131	0.70	17.42
50 (63)	8200	35x60	0.25	3.18
	10000	35x70	0.25	3.75
	15000	35x80	0.25	4.88
	22000	51x70	0.35	5.57
	33000	51x90	0.35	7.60
	47000	64x96	0.40	9.48
	56000	64x96	0.40	10.34
	68000	64x115	0.45	11.62
	100000	77x115	0.50	14.14
	150000	90x131	0.50	19.02
63 (79)	6800	35x70	0.20	3.31
	8200	35x80	0.20	3.86
	10000	35x90	0.20	4.50
	15000	51x70	0.25	4.95
	22000	51x90	0.25	6.68
	33000	64x96	0.30	8.73
	47000	64x115	0.35	10.43
	56000	77x96	0.40	10.96
	68000	77x115	0.40	13.03
	100000	90x131	0.40	17.36
100 (125)	5600	35x90	0.15	4.59
	6800	51x70	0.15	5.16
	8200	51x80	0.15	6.00
	10000	51x90	0.15	6.97
	15000	64x96	0.15	7.57
	22000	77x96	0.25	8.69
	33000	77x130	0.25	12.11

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	R.C (A/rms,105℃) (120Hz)
100 (125)	47000	90x131	0.25	15.05
160 (200)	1000	35x50	0.15	1.50
	1500	35x60	0.15	1.98
	2200	35x70	0.15	2.57
	3300	35x90	0.15	3.52
	4700	51x80	0.15	4.54
	5600	51x90	0.15	5.22
	6800	64x96	0.15	5.89
	8200	64x96	0.15	6.46
	10000	77x96	0.15	7.56
	15000	77x130	0.15	10.54
	22000	90x131	0.15	13.30
200 (250)	1000	35x60	0.15	1.62
	1500	35x70	0.15	2.12
	2200	35x90	0.15	2.88
	3300	51x80	0.15	3.49
	4700	51x90	0.15	4.38
	5600	64x96	0.15	5.34
	6800	64x115	0.15	6.37
	8200	77x96	0.15	6.85
	10000	77x115	0.15	8.16
	15000	90x131	0.15	10.98
250 (300)	1000	35x70	0.15	1.73
	1500	35x90	0.15	2.38
	2200	51x70	0.15	2.94
	3300	51x90	0.15	4.01
	3900	64x96	0.15	4.46
	4700	64x115	0.15	5.29
	5600	77x96	0.15	5.94
	6800	77x115	0.15	7.07
	8200	77x130	0.15	8.18
	10000	77x155	0.15	9.76
	15000	90x157	0.15	11.87
350 (400)	1000	51x65	0.15	2.40
	1500	51x70	0.15	3.03
	2200	51x96	0.15	4.21
	3300	64x96	0.15	5.47
	3900	64x115	0.15	6.43
	4700	64x130	0.15	7.45
	5600	77x115	0.15	7.94
	6800	77x130	0.15	9.23
	8200	77x155	0.15	10.95
	10000	90x157	0.15	12.25
400 (450)	1000	51x70	0.15	2.47
	1500	51x90	0.15	3.38
	2200	64x96	0.15	4.46
	3300	64x130	0.15	6.24
	3900	64x155	0.15	7.34
	4700	77x130	0.15	7.97
	5600	77x155	0.15	9.39
	6800	90x157	0.15	10.94
	8200	90x157	0.15	12.01
	10000	90x196	0.15	14.64
450 (500)	1000	51x90	0.15	2.94
	1500	51x115	0.15	4.02
	2200	64x115	0.15	5.17
	3300	64x130	0.15	6.69
	3900	77x121	0.15	7.82
	4700	77x144	0.15	9.26
	5600	90x145	0.15	11.06
	6800	90x196	0.15	13.93

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：MP
Teapo Series：MP High voltage、Long life Series




■ Endurance:85℃ 5000hours
■ Recommended Applications :UPS、service system、press working equipment、charging equipment、inverter、converter
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +85℃
Rated Voltage Range	350 ~ 450VDC
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I≦0.02CVor5mA whichever is greater. (After rated voltage applied for 5 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV 350 400 450 tan δ 0.15 0.15 0.15
Low Temperature Stability Impedance Ratio (MAX)	Rated voltage(V) Rated voltage(V) 350~450 Z-25℃ / Z+20℃ 8
Endurance	After applying rated voltage with ripple current for 5000 hours at85℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 85℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

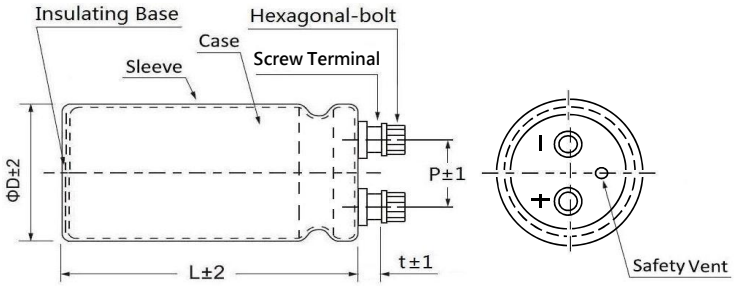

ΦD	P	t	Hexagonal-bolt
51	22.2	6.3	M5 × 0.8 × 10
64	28.5	6.3	M5 × 0.8 × 10
77	31.8	5.8	M5 × 0.8 × 10
90	31.6	5.8	M6 × 1.0 × 10

■ Multiplier for Ripple Current

Freq. (Hz)	60	120	300	1K	≧10K
coefficient	0.70	1.00	1.10	1.30	1.40

Temperature	40	60	85
coefficient	1.89	1.67	1.00

Jamicon Series：MP

Teapo Series：MP

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms85℃) (120Hz)
350 (400)	1200	51x75	0.15	5.21
	1500	51x75	0.15	5.82
	1800	51x96	0.15	7.1
	2200	51x96	0.15	7.85
	2700	51x130	0.15	9.97
	3300	51x130	0.15	11.02
	3900	64x115	0.15	12.5
	4700	64x130	0.15	14.53
	5600	64x155	0.15	17.16
		77x115	0.15	15.39
	6800	64x195	0.15	21
		77x130	0.15	17.88
	8200	77x155	0.15	21.22
	10000	90x157	0.15	25
	12000	90x157	0.15	27.39
	15000	90x196	0.15	33.78
	18000	90x236	0.15	40.25
400 (450)	1000	51x75	0.15	4.76
	1200	51x75	0.15	5.21
	1500	51x96	0.15	6.48
	1800	51x96	0.15	7.10
	2200	51x130	0.15	8.99
	2700	64x96	0.15	9.64
	3300	64x115	0.15	11.53
	3900	64x130	0.15	13.23

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms85℃) (120Hz)
400 (450)	4700	64x155	0.15	15.72
		77x115	0.15	14.10
	5600	64x195	0.15	19.06
		77x130	0.15	16.23
	6800	77x155	0.15	19.33
	8200	90x157	0.15	22.64
	10000	90x157	0.15	25.00
	12000	90x196	0.15	30.22
	15000	90x236	0.15	36.74
450 (500)	1000	51x75	0.15	4.99
	1200	51x96	0.15	6.1
	1500	51x115	0.15	7.4
	1800	51x130	0.15	8.54
	2200	64x96	0.15	8.93
	2700	64x115	0.15	10.69
	3300	64x130	0.15	12.48
	3900	64x155	0.15	14.68
		77x115	0.15	13.56
	4700	64x195	0.15	17.91
		77x130	0.15	15.69
	5600	77x155	0.15	18.51
	6800	90x157	0.15	21.21
	8200	90x157	0.15	23.29
	10000	90x196	0.15	28.37
	12000	90x236	0.15	33.80

Jamicon Series：XP
Teapo Series：XP High voltage、Long life Series




■ Endurance:105℃ 5000hours
■ Recommended Applications :UPS、service system、press working equipment、charging equipment、inverter、converter
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃
Rated Voltage Range	200 ~ 450VDC
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I≦0.02CVor5mA whichever is greater. (After rated voltage applied for 5 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 200 / 250 / 350 / 400 / 450 tan δ: 0.20 / 0.20 / 0.15 / 0.15 / 0.15
Low Temperature Stability Impedance Ratio (MAX)	Measurement frequency : 120Hz Rated voltage(V): 200~450 Z-25℃ / Z+20℃: 8
Endurance	After applying rated voltage with ripple current for 5000 hours at105℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ 尺寸图

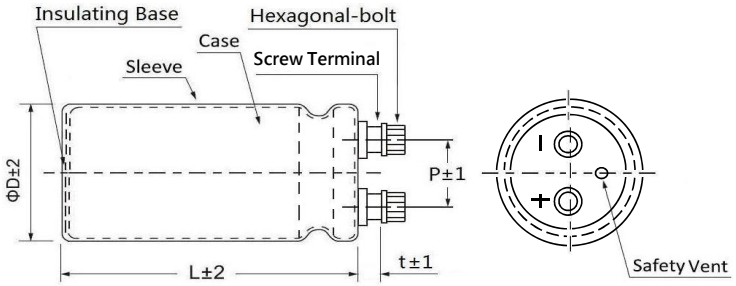

ΦD	P	t	Hexagonal-bolt
51	22.2	6.3	M5 × 0.8 × 10
64	28.5	6.3	M5 × 0.8 × 10
77	31.8	5.8	M5 × 0.8 × 10
90	31.6	5.8	M6 × 1.0 × 10

■ 纹波电流频率修正系数

Freq. (Hz)	60(50)	120	300	1K	≧10K
coefficient	0.70	1.00	1.10	1.30	1.40

Temperature	40	60	85	105
coefficient	2.44	2.16	2.00	1.00

Jamicon Series：XP

Teapo Series：XP

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
200 (250)	2200	51x80	0.20	2.92
	3300	51x100	0.20	3.94
	4700	64x100	0.20	5.13
	6800	64x121	0.20	6.71
	10000	77x121	0.20	8.31
	15000	77x144	0.20	10.98
	22000	90x145	0.20	11.40
	33000	90x236	0.20	17.34
250 (300)	1500	51x80	0.20	2.41
	2200	51x100	0.20	3.21
	3300	64x100	0.20	4.47
	4700	64x121	0.20	5.80
	6800	77x121	0.20	7.15
	10000	90x145	0.20	9.36
	15000	90x171	0.20	12.36
	22000	90x236	0.20	17.30
350 (400)	1000	51x75	0.15	3.06
	1200	51x75	0.15	3.35
	1500	51x96	0.15	4.17
	1800	51x96	0.15	4.57
	2200	51x130	0.15	5.78
	2700	64x96	0.15	6.00
	3300	64x115	0.15	7.18
	3900	64x130	0.15	8.24
	4700	64x155	0.15	9.79
		77x115	0.15	8.95
	5600	64x196	0.15	11.87
		77x130	0.15	10.30
	6800	77x130	0.15	12.27
	8200	90x157	0.15	13.86
	10000	90x157	0.15	15.31
	12000	90x196	0.15	18.50
	15000	90x236	0.15	22.50
400 (450)	1000	51x75	0.15	3.40

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
400 (450)	1200	51x96	0.15	4.14
	1500	51x115	0.15	5.02
	1800	51x130	0.15	5.81
	2200	51x130	0.15	6.43
		64x96	0.15	6.22
	2700	64x115	0.15	7.45
	3300	64x130	0.15	8.69
	3900	64x155	0.15	10.23
		77x115	0.15	9.18
	4700	64x195	0.15	12.47
		77x130	0.15	10.62
	5600	64x195	0.15	13.61
		77x155	0.15	12.53
	6800	90x157	0.15	14.73
	8200	90x157	0.15	16.17
	10000	90x196	0.15	19.70
	12000	90x236	0.15	23.48
450 (500)	1000	51x96	0.15	4.25
	1200	51x115	0.15	5.05
	1500	51x130	0.15	5.97
	1800	64x96	0.15	6.20
	2200	64x115	0.15	7.41
	2700	64x130	0.15	8.67
		77x115	0.15	8.69
	3300	64x155	0.15	10.37
		77x130	0.15	10.14
	3900	64x195	0.15	12.53
	4700	77x155	0.15	13.07
	5600	77x195	0.15	15.82
		90x157	0.15	14.89
	6800	90x196	0.15	18.10
	8200	90x196	0.15	19.88
	10000	90x236	0.15	23.88

Jamicon Series：JP
Teapo Series：JP High voltage、Long life Series




■ Endurance:85℃ 10000hours
■ Recommended Applications :UPS、service system、press working equipment、charging equipment、inverter、converter
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +85℃
Rated Voltage Range	350 ~ 450VDC
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I≦0.02CVor5mA whichever is greater. (After rated voltage applied for 5 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 350 / 400 / 450 tan δ: 0.15 / 0.15 / 0.15
Low Temperature Stability Impedance Ratio (MAX)	Measurement frequency : 120Hz Rated voltage(V): 350~450 Z-25℃ / Z+20℃: 8
Endurance	After applying rated voltage with ripple current for 10000 hours at85℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

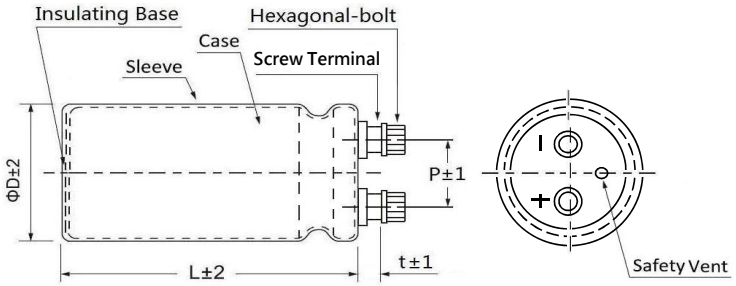

ΦD	P	t	Hexagonal-bolt
51	22.2	6.3	M5 × 0.8 × 10
64	28.5	6.3	M5 × 0.8 × 10
77	31.8	5.8	M5 × 0.8 × 10
90	31.6	5.8	M6 × 1.0 × 10

■ Multiplier for Ripple Current

Freq. (Hz)	60	120	300	1K	≧10K
coefficient	0.70	1.00	1.10	1.30	1.40

Temperature	40	60	85
coefficient	1.89	1.67	1.00

Jamicon Series：JP

Teapo Series：JP

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms85℃) (120Hz)
350 (400)	1000	51x75	0.15	5.7
	1200	51x75	0.15	6.3
	1500	51x96	0.15	7.8
	1800	51x96	0.15	8.5
	2200	51x130	0.15	10.8
	2700	64x96	0.15	11.5
	3300	64x115	0.15	13.7
	3900	64x130	0.15	15.8
	4700	64x155	0.15	18.7
		77x115	0.15	17.6
	5600	64x195	0.15	22
		77x130	0.15	20.3
	6800	77x155	0.15	23.4
	8200	90x157	0.15	27.2
	10000	90x157	0.15	30
	12000	90x196	0.15	36.3
	15000	90x236	0.15	42.5
400 (450)	1000	51x75	0.15	4.6
	1200	51x96	0.15	5.6
	1500	51x115	0.15	6.7
	1800	51x130	0.15	7.8
	2200	64x96	0.15	8.3
	2700	64x115	0.15	9.9
	3300	64x130	0.15	11.6
	3900	64x155	0.15	13.6

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms85℃) (120Hz)
400 (450)	3900	77x115	0.15	12.8
	4700	64x195	0.15	16.6
		77x130	0.15	14.9
	5600	64x195	0.15	17.6
		77x155	0.15	17.0
	6800	90x157	0.15	19.8
	8200	90x157	0.15	21.7
	10000	90x196	0.15	25.5
	12000	90x236	0.15	20.4
450 (500)	1000	51x96	0.15	5.9
	1200	51x115	0.15	7
	1500	51x130	0.15	8.3
	1800	64x96	0.15	8.7
	2200	64x115	0.15	10.5
	2700	64x130	0.15	12.2
		77x115	0.15	12.5
	3300	64x155	0.15	14.6
		77x130	0.15	14.5
	3900	64x195	0.15	17.7
	4700	77x155	0.15	18.1
	5600	77x195	0.15	21.9
		90x157	0.15	21.00
	6800	90x196	0.15	25.40
	8200	90x196	0.15	28
	10000	90x236	0.15	32.4

Product specifications in this catalog are subject to change without notice.Please refer to the website directory.

Jamicon Series：EP
Teapo Series：EP High voltage、Long life Series




■ Endurance:105℃ 10000hours
■ Recommended Applications :UPS、service system、press working equipment、charging equipment、inverter、converter
■ Corresponding product to RoHS

■ SPECIFICATIONS

Item	Characteristics
Category Temperature Range	-40 ~ +105℃
Rated Voltage Range	350 ~ 450VDC
Rated Capacitance Range	1000 ~ 15000μF
Capacitance Tolerance	± 20 % (120Hz , 20℃)
Leakage Current (20℃)	I≦0.02CVor5mA whichever is greater. (After rated voltage applied for 5 minutes) I：Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)
Dissipation Factor(MAX) (tan δ) (120Hz ,20℃)	WV: 350 / 400 / 450 tan δ: 0.15 / 0.15 / 0.15
Low Temperature Stability Impedance Ratio (MAX)	Measurement frequency : 120Hz Rated voltage(V): 350~450 Z-25℃ / Z+20℃: 8
Endurance	After applying rated voltage with ripple current for 10000 hours at105℃, the capacitors shall meet the following requirements. Capacitance change: Within ± 20% of initial value D.F. (tan δ): Not more than 200% of specified value Leakage current: Not more than the specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for1,000 hours at 105℃without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.

■ Dimensions [mm]

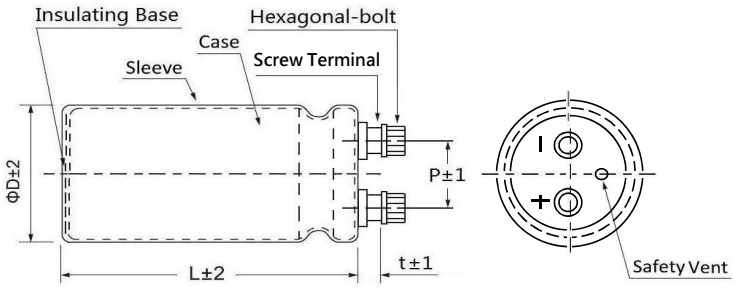

ΦD	P	t	Hexagonal-bolt
51	22.2	6.3	M5 × 0.8 × 10
64	28.5	6.3	M5 × 0.8 × 10
77	31.8	5.8	M5 × 0.8 × 10
90	31.6	5.8	M6 × 1.0 × 10

■ Multiplier for Ripple Current

Freq. (Hz)	60(50)	120	300	1K	≧10K
coefficient	0.70	1.00	1.10	1.30	1.40

Temperature	40	60	85	105
coefficient	2.44	2.16	2.00	1.00

Jamicon Series：EP

Teapo Series：EP

■STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
350 (400)	1000	51x75	0.15	5.6
	1200	51x75	0.15	6.1
	1500	51x96	0.15	7.6
	1800	51x96	0.15	8.3
	2200	51x130	0.15	10.5
	2700	64x96	0.15	10.9
	3300	64x115	0.15	13.1
	3900	64x130	0.15	15.0
	4700	64x155	0.15	17.8
		77x115	0.15	16.8
	5600	64x195	0.15	21.6
		77x130	0.15	19.3
	6800	77x144	0.15	22.3
	8200	90x157	0.15	26.1
	10000	90x157	0.15	28.8
	12000	90x196	0.15	34.8
	15000	90x236	0.15	42.3
400 (450)	1000	51x75	0.15	5.6
	1200	51x96	0.15	6.8
	1500	51x115	0.15	8.2
	1800	51x130	0.15	9.5
	2200	64x96	0.15	9.7
	2700	64x115	0.15	11.8
	3300	64x130	0.15	13.8
	3900	64x155	0.15	16.2

Rated Voltage (SurageVoltage) (V)	Cap (μF)	Case size ΦDxL(mm)	tan δ	Ripple current (A/rms105℃) (120Hz)
400 (450)	3900	77x115	0.15	15.3
	4700	64x195	0.15	19.8
		77x130	0.15	17.7
	5600	64x195	0.15	21.6
		77x155	0.15	20.9
	6800	90x157	0.15	23.7
	8200	90x157	0.15	26.1
	10000	90x196	0.15	31.8
	12000	90x236	0.15	37.8
450 (500)	1000	51x96	0.15	6.2
	1200	51x115	0.15	7.4
	1500	51x130	0.15	8.7
	1800	64x115	0.15	9.7
	2200	64x115	0.15	10.7
	2700	64x130	0.15	12.5
		77x115	0.15	12.7
	3300	64x155	0.15	14.9
		77x130	0.15	14.8
	3900	64x195	0.15	18
	4700	77x155	0.15	19.1
	5600	77x195	0.15	23.20
		90x157	0.15	21.50
	6800	90x196	0.15	26.2
	8200	90x196	0.15	28.8
	10000	90x236	0.15	34.5

Quality and Environmental Management System Certification

TEAPO ELECTRONIC (DONGGUAN) CO., LTD

Standara	Certificate Number
ISO 9001：2015	CA00561-ZH
IATF 16949：2016	CB01066
IECQ QC080000：2017	INV22QC024R1
ISO 14001：2015	IAS21E003R1
ISO 45001:2018	IAS21S002R1
ISO/IEC 17025：2017	CNASL22374
ISO27001	IS 808374
ISO14064-1	INV24GHG025R0

SUZHOU KAIMEI ELECTRONIC CO., LTD

Standara	Certificate Number
ISO9001：2015	15/24Q5128R21
IATF 16949：2016	T183001 / 0471360
ISO14001：2015	15/24E5129R60
ISO45001：2018	15/23S5050R11

JAMICON
TEAPO



凯美电机股份有限公司
KAIMEI ELECTRONIC CORP.
Tel：+886-2-2698-1010 Fax: +886-2-2698-0386
Email：sales@jamicon.teapo.com
地址:新北市汐止区新台五路一段81号13楼-3
13th. FL., No.81, SEC. 1, XINTAI 5th RD. XIZHI DIST.
New Taipei City 22101, Taiwan R.O.C



智宝电子（东莞）有限公司
TEAPO ELECTRONIC (DONGGUAN) CO., LTD
Tel：+86-769-8791-4676 Fax：+86-769-8791-4770
Email：sales@jamicon.teapo.com
地址:广东省东莞市塘厦镇高丽一路55号3、 4栋
Buildings 3 & 4, No. 55 Gaoli 1st Rd. Gaoli Ind. Zone, Tangxia Town,
Dongguan City, Guangdong 523726, China.



苏州凯美电子有限公司
SUZHOU KAIMEI ELECTRONIC CO., LTD
Tel：+86-512-6636-8640 Fax :+86-512-6538-1888
Email：sales@jamicon.teapo.com
地址：江苏省苏州市相城区村杭桥路2号
No. 2 Hangqiao Road,Xiangcheng District,
SuzhouCity,Jiang Su,China.